



Picture shown may not reflect actual configuration

Full range of attachments

- Wide range of system expansion attachments, designed specifically to work with the EMCP 4
- Flexible packaging options for easy and cost effective installation

World wide product support

- Cat dealers provide extensive pre and post sale support
- Cat dealers have over 1,600 dealer branch stores operating in 200 countries

Features

- A 33 x 132 pixel, 3.8 inch, white backlit graphical display denotes text alarm/event descriptions, set points, engine and generator monitoring, and is visible in all lighting conditions.
- Textual display with support for 26 languages
- Advanced engine monitoring is available on systems with an ADEM™ controller.
- Integration with the CDVR and IVR provides enhanced system performance
- Fully featured power metering, protective relaying, engine and generator parameter viewing, and expanded AC metering are all integrated into this controller.
- Real-time clock allows for date and time stamping of diagnostics and events in the control's logs as well as service maintenance reminders based on engine operating hours or calendar days. Up to 40 diagnostic events are stored in the non-volatile memory

EMCP 4.2B GENERATOR SET CONTROLLER

The Cat® EMCP 4.2B offers fully featured power metering, protective relaying and engine and generator control and monitoring. Engine and generator controls, diagnostics, and operating information are accessible via the control panel keypads; diagnostics from the EMCP 4 optional modules can be viewed and reset through the EMCP 4.2B.

Features

- Ability to view and reset diagnostics on EMCP 4 optional modules via the control panel removes the need for a separate service tool for troubleshooting
- Set points and software stored in non-volatile memory, preventing loss during a power outage
- Five levels of security allow for configurable operator privileges
- Programmable security levels for groups of setpoints.
- Programmable kW Relays (3)
- Programmable weekly exerciser timer
- Dealer configurable resistive maps
- Default overview screen
- Real (kW) Load histogram
- Auto mains failure
- Programmable logic functionality
- Selectable units
 - Temperature: °C or °F
 - Pressure: psi, kPa, bar
 - Fuel Consumption: Liter/hr or Gal/hr (U.S. or U.K.)

Standard Features

- Voltage (L-L, L-N)
- Current (Phase)
- Average Volt, Amp, Frequency
- kW, kVAr, kVA (Average, Phase, %)
- Power Factor (Average, Phase)
- kW-hr, kVAr-hr (total)
- Excitation voltage and current (with CDVR)
- Desired Voltage, Excitation Command, Operating Mode (with IVR)
- Generator stator and bearing temp (with optional module)
- kW load histogram

Generator Protection

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under frequency (81 O/U)
- Reverse Power (kW) (32)
- Reverse Reactive Power (kVAr) (32RV)
- Overcurrent (50/51)
- Thermal Damage Curve

Engine Monitoring

- Coolant temperature
- Oil pressure
- Engine speed (RPM)
- Battery voltage
- Run hours
- Crank attempt and successful start counter
- Enhanced engine monitoring (with electronic engines)

Engine Protection

- Control switch not in auto (alarm)
- High coolant temp (alarm and shutdown)
- Low coolant temp (alarm)
- Low coolant level (alarm)
- High engine oil temp (alarm and shutdown)
- Low, high, and weak battery voltage
- Overspeed
- Overcrank
- Low Oil Pressure

Control

- Run / Auto / Stop control
- Speed and voltage adjust
- Local and remote emergency stop
- Remote start/stop
- Cycle crank

Inputs & Outputs

- Two dedicated digital inputs
- Three analog inputs
- Six programmable digital inputs
- Eight relay out
- Two programmable digital outputs

Communications

- Primary and accessory CAN data links
- RS-485 annunciator data link
- Modbus RTU (RS-485 Half duplex)

Language Support

Arabic, Bulgarian, Czech, Chinese, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hungarian, Italian, Icelandic, Japanese, Latvian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Spanish, Swedish, Turkish

Environmental

- Control module operating temperature: -40°C to 70°C
- Display operating temperature: -20°C to 70°C
- Humidity: 100% condensing 30°C to 60°C
- Storage temperature: -40°C to 85°C
- Vibration: Random profile, 24-1000 Hz, 4.3G rms

Standards

- UL Recognized
- CSA C22.2 No.100,14, 94
- Complies with all necessary standards for CE Certification
 - 98/37/EC Machinery Directive
 - BS EN 60204-1 Safety of Machinery
 - 89/336/EEC EMC Directive
 - BS EN 50081-1 Emissions Standard
 - BS EN 50082-2 Immunity Standard
 - 73/23/EEC Low Voltage Directive
 - EN 50178 LVD Standard
- IEC529, IEC60034-5, IEC61131-3
- MIL STND 461

Optional Modules

CAN annunciator



The EMCP 4 CAN Annunciator serves to display generator set system alarm conditions and status indications.

The annunciator has been designed for use on the accessory communication network and may be used in either local (package mounted) or remote (up to 800 feet) application. A maximum of four annunciators may be used with a single EMCP.

RS-485 annunciator



The EMCP 4 RS-485 Annunciator serves to display generator set system alarm conditions and status indications. The annunciator has been designed for use on the long distance annunciator datalink and is used for remote (up to 4000 feet) application.


The remote monitoring software allows the user to configure data monitoring and data acquisition processes for monitoring, graphing, and logging of generator set data.

Remote monitoring software



The EMCP remote monitoring software package is a PC based program which allows the user to monitor and control a generator set, and is capable of running on a Windows based operating system. The remote monitoring software allows the user to configure data monitoring and data acquisition processes for monitoring, graphing, and logging of generator set data.

Programmable logic software

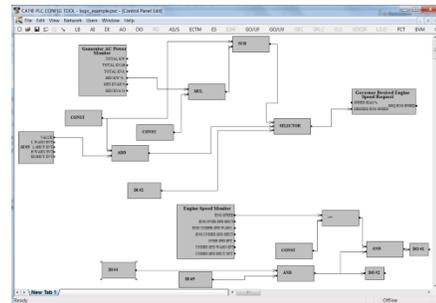

The EMCP programmable logic software package is a PC based program which allows the configuration of the programmable logic blocks, and is capable of running on a Windows based operating system. The programmable logic software allows the user to configure logic to change the operation of the EMCP control and interfaces within a limited scope.

Optional Modules (Continued)

Digital input/output module



The Digital Input/Output (DI/O) module serves to provide expandable Input and Output event capability of the EMCP 4 and is capable of reading 12 digital inputs and setting 8 relay outputs.

The DI/O module has been designed for use on the accessory Communication Network and may be used in either local (package mounted) or remote (up to 800 feet) application.

RTD module

The RTD module serves to provide expandable generator temperature monitoring capability of the EMCP 4 and is capable of reading up to eight type 2-wire, 3-wire and 4-wire RTD inputs.

The RTD Module has been designed for use on the Accessory Communication Network and may be used in either local (package mounted) or remote (up to 800 feet) application. A maximum of one RTD Module may be used with a single EMCP 4.

Thermocouple module

The thermocouple module serves to provide expandable engine and generator temperature monitoring capability of the EMCP 4 and is capable of reading up to twenty Type J or K thermocouple inputs.

The thermocouple module has been designed for use on the primary communication network for engine information and the accessory communication network for generator information. It may be used in either local (package mounted) or remote (up to 800 feet) application. A maximum of one thermocouple modules may be used with a single EMCP 4 on each datalink.

Materials and specifications are subject to change without notice.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.