DIESEL GENERATOR SET

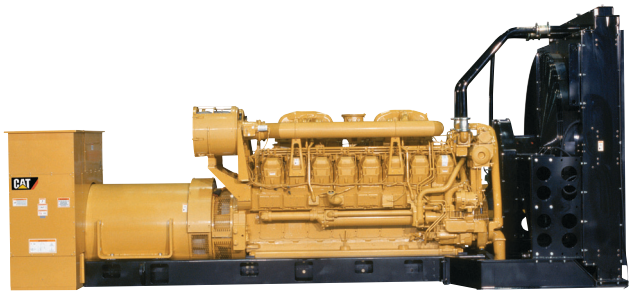


Image shown may not reflect actual package.

STANDBY
1600 ekW 2000 kVA
50 Hz 1500 rpm 400 Volts

Caterpillar is leading the power generation marketplace with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

FEATURES

FUEL/EMISSIONS STRATEGY
- Low Fuel consumption

DESIGN CRITERIA
- The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response.

FULL RANGE OF ATTACHMENTS
- Wide range of bolt-on system expansion attachments, factory designed and tested
- Flexible packaging options for easy and cost effective installation

SINGLE-SOURCE SUPPLIER
- Fully prototype tested with certified torsional vibration analysis available

WORLDWIDE PRODUCT SUPPORT
- Cat dealers provide extensive post sale support including maintenance and repair agreements
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries
- The Cat® S•O•S℠ program cost effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by-products

CAT® 3516 TA DIESEL ENGINE
- Reliable, rugged, durable design
- Field-proven in thousands of applications worldwide
- Four-stroke-cycle diesel engine combines consistent performance and excellent fuel economy with minimum weight

CAT SR5 GENERATOR
- Matched to the performance and output characteristics of Cat engines
- Industry leading mechanical and electrical design
- Industry leading motor starting capabilities
- High Efficiency

CAT EMCP 4 CONTROL PANELS
- Simple user friendly interface and navigation
- Scalable system to meet a wide range of customer needs
- Integrated Control System and Communications Gateway

STANDBY 1600 ekW 2000 kVA

50 Hz 1500 rpm 400 Volts

FACTORY INSTALLED STANDARD & OPTIONAL EQUIPMENT

System	Standard	Optional
Air Inlet	• Single element canister type air cleaner • Service indicator	[ ] Dual element & heavy duty air cleaners [ ] Air inlet adapters & shut-off
Cooling	• Radiator with guard • Coolant drain line with valve • Radiator fan and fan drive • Fan and belt guards • Cat® Extended Life Coolant* • Coolant level sensors	[ ] Duct flange [ ] Heat exchanger and expansion tank [ ] Coolant level switch gauge [ ] Jacket water heater
Exhaust	• Dry exhaust manifold • Flanged faced outlets	[ ] Mufflers and Silencers [ ] Stainless steel exhaust flex fittings [ ] Elbows, flanges, expanders & Y adapters
Fuel	• Secondary fuel filters • Fuel priming pump • Flexible fuel lines • Fuel cooler*	[ ] Water separator [ ] Duplex fuel filter [ ] Primary Fuel Filter
Power Termination	• Bus bar (NEMA and IEC mechanical lug holes) • Top cable entry	[ ] Circuit breakers, UL listed, 3 pole with shunt trip,100% rated, choice of trip units, manual or electrically operated (low voltage only) [ ] Circuit breakers, IEC compliant, 3 or 4 pole with shunt trip (low voltage only), choice of trip units, manual or electrically operated [ ] Bottom cable entry [ ] Power terminations can be located on the right, left and/or rear as an option. Multiple circuit breaker options
Generator	• Class H insulation • Cat digital voltage regulator (CDVR) with kVAR/PF control, 3-phase sensing • Reactive droop	[ ] Oversize & premium generators [ ] Winding temperature detectors [ ] Anti-condensation heaters
Governor	• Woodward 2301 isochronous	[ ] Load share governor
Control Panel	• EMCP 4.2 • User Interface panel (UIP) - rear mount • AC & DC customer wiring area (right side) • Emergency stop pushbutton	[ ] Option for right or left mount UIP [ ] Local & remote annunciator modules [ ] Digital I/O Module [ ] Generator temperature monitoring & protection [ ] Remote monitoring software
Lube	• Lubricating oil • Gear type lube oil pump • Oil filter, filler and dipstick • Oil drain lines and valve • Fumes disposal	[ ] Oil level regulator [ ] Deep sump oil pan [ ] Electric & air prelube pumps [ ] Manual prelube with sump pump [ ] Duplex oil filter
Mounting	• Rails - Engine / generator / radiator mounting • Rubber anti-vibration mounts (shipped loose)	[ ] Isolator removal [ ] Spring-type vibration isolator (shipped loose)
Starting/Charging	• 24 volt starting motor(s) • Batteries with rack and cables • Battery disconnect switch	[ ] Battery chargers (10 or 20 amp) [ ] 45 amp charging alternator [ ] Oversize batteries [ ] Ether starting aid [ ] Heavy duty starting motors [ ] Barring device (manual) [ ] Air starting motor with control & silencer
General	• Right hand service • Paint - Caterpillar Yellow (with high gloss black rails & radiator) • SAE standard rotation • Flywheel and flywheel housing - SAE No. 00	[ ] CSA certification [ ] CE Certificate of Conformance [ ] Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, CBC 2007 * Not included with packages without radiators

STANDBY 1600 ekW 2000 kVA

50 Hz 1500 rpm 400 Volts

SPECIFICATIONS

CAT GENERATOR

Cat Generator
Frame size..... 1625
Excitation.....Internal Excitation
Pitch.....0.6667
Number of poles.....4
Number of bearings..... Single bearing
Number of Leads.....006
Insulation..... UL 1446 Recognized Class H with tropicalization and antiabrasion
Insulation.....Class F with tropicalization and antiabrasion
- Consult your Caterpillar dealer for available voltages
IP Rating.....IP23
Alignment.....Pilot Shaft
Overspeed capability.....150
Wave form Deviation (Line to Line)..... 002.00
Voltage regulator.....3 Phase sensing with selectible volts/Hz
Voltage regulation.....Less than +/- 1/2% (steady state)
Less than +/- 1% (no load to full load)
Telephone influence factor.....Less than 50
Harmonic Distortion.....Less than 5%

CAT DIESEL ENGINE

3516 TA, V-16, 4-Stroke Water-cooled Diesel
Bore..... 170.00 mm (6.69 in)
Stroke..... 190.00 mm (7.48 in)
Displacement.....69.00 L (4210.64 in^3)
Compression Ratio..... 13.5:1
Aspiration.....TA
Fuel System..... Electronic unit injection
Governor Type.....Woodward

CAT EMCP 4 SERIES CONTROLS

EMCP 4 controls including:
- Run / Auto / Stop Control
- Speed and Voltage Adjust
- Engine Cycle Crank
- 24-volt DC operation
- Environmental sealed front face
- Text alarm/event descriptions

Digital indication for:
- RPM
- DC volts
- Operating hours
- Oil pressure (psi, kPa or bar)
- Coolant temperature
- Volts (L-L & L-N), frequency (Hz)
- Amps (per phase & average)
- ekW, kVA, kVAR, kW-hr, %kW, PF

Warning/shutdown with common LED indication of:
- Low oil pressure
- High coolant temperature
- Overspeed
- Emergency stop
- Failure to start (overcrank)
- Low coolant temperature
- Low coolant level

Programmable protective relaying functions:
- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under Frequency (81 o/u)
- Reverse Power (kW) (32)
- Reverse reactive power (kVAr) (32RV)
- Overcurrent (50/51)

Communications:
- Six digital inputs (4.2 only)
- Four relay outputs (Form A)
- Two relay outputs (Form C)
- Two digital outputs
- Customer data link (Modbus RTU)
- Accessory module data link
- Serial annunciator module data link
- Emergency stop pushbutton

Compatible with the following:
- Digital I/O module
- Local Annunciator
- Remote CAN annunciator
- Remote serial annunciator

STANDBY 1600 ekW 2000 kVA

50 Hz 1500 rpm 400 Volts

TECHNICAL DATA

Open Generator Set - - 1500 rpm/50 Hz/400 Volts	DM8366	
Low Fuel Consumption		
Generator Set Package Performance		
Genset Power rating @ 0.8 pf	2000 kVA	
Genset Power rating with fan	1600 ekW	
Coolant to aftercooler		
Coolant to aftercooler temp max	82 ° C	180 ° F
Fuel Consumption		
100% load with fan	420.9 L/hr	111.2 Gal/hr
75% load with fan	317.5 L/hr	83.9 Gal/hr
50% load with fan	226.0 L/hr	59.7 Gal/hr
Cooling System[1]		
Air flow restriction (system)	0.12 kPa	0.48 in. water
Engine Coolant capacity with radiator/exp. tank	398.0 L	105.1 gal
Engine coolant capacity	233.0 L	61.6 gal
Radiator coolant capacity	165.0 L	43.6 gal
Inlet Air		
Combustion air inlet flow rate	127.7 m³/min	4509.7 cfm
Exhaust System		
Exhaust stack gas temperature	498.5 ° C	929.3 ° F
Exhaust gas flow rate	334.0 m³/min	11795.1 cfm
Exhaust flange size (internal diameter)	203.2 mm	8.0 in
Exhaust system backpressure (maximum allowable)	6.7 kPa	26.9 in. water
Heat Rejection		
Heat rejection to coolant (total)	1055 kW	59998 Btu/min
Heat rejection to exhaust (total)	1532 kW	87125 Btu/min
Heat rejection to aftercooler	232 kW	13194 Btu/min
Heat rejection to atmosphere from engine	166 kW	9440 Btu/min
Heat rejection to atmosphere from generator	77.1 kW	4384.7 Btu/min
Alternator[2]		
Motor starting capability @ 30% voltage dip	4978 skVA	
Frame	1625	
Temperature Rise	125 ° C	225 ° F
Lube System		
Sump refill with filter	401.3 L	106.0 gal
Emissions (Nominal)[3]		
NOx mg/nm3	7207.2 mg/nm³	
CO mg/nm3	350.6 mg/nm³	
HC mg/nm3	89.3 mg/nm³	

[1] For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

[2] UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40 degree C ambient per NEMA MG1-32.

[3] Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77°F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

RATING DEFINITIONS AND CONDITIONS

Meets or Exceeds International Specifications: AS1359, CSA, IEC60034-1, ISO3046, ISO8528, NEMA MG 1-22, NEMA MG 1-33, UL508A, 72/23/EEC, 98/37/EC, 2004/108/EC

Standby - Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year. Standby power in accordance with ISO8528. Fuel stop power in accordance with ISO3046. Standby ambients shown indicate ambient temperature at 100% load which results in a coolant top tank temperature just below the shutdown temperature.

Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

Fuel rates are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

STANDBY 1600 ekW 2000 kVA

50 Hz 1500 rpm 400 Volts

DIMENSIONS

Package Dimensions		
Length	**5905.4 mm**	**232.5 in**
Width	**2286.0 mm**	**90 in**
Height	**2342.0 mm**	**92.2 in**
Weight	**9072 kg**	**20,000 lb**

NOTE: For reference only - do not use for installation design. Please contact your local dealer for exact weight and dimensions. (General Dimension Drawing #2882679).

Performance No.: DM8366

Feature Code: 516DE89

Gen. Arr. Number: 2523846

Source: U.S. Sourced

July 26 2011

17801787

www.Cat-ElectricPower.com

© 2011 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.