



3508 Industrial Engine

746 bkW/1000 bhp @ 1800 rpm

Image shown may not reflect actual engine

CAT® ENGINE SPECIFICATIONS

V-8, 4-Stroke-Cycle Diesel

Bore..... 170.0 mm (6.69 in)
Stroke..... 190.0 mm (7.48 in)
Displacement..... 34.53 L (2,107.15 in³)
Aspiration..... Turbocharged / Aftercooled
Compression Ratio..... 13.0:1
Rotation (from flywheel end)..... Counterclockwise
Capacity for Liquids
 Cooling System..... 102.7 L (27.1 gal)
 Lube Oil System..... 424.0 L (112.0 gal)
Engine Weight, Net Dry (approximate) 4,611 kg (10,166 lb)

FEATURES

EMISSIONS

Non-certified rating.

SINGLE SOURCE SUPPLIER

Caterpillar
- Casts engine blocks, heads, cylinder liners, and flywheel housings
- Machines critical components
- Assembles complete engine
Ownership of these manufacturing processes enables Caterpillar to produce high quality, dependable product.

Factory-designed systems built at Caterpillar ISO 9001:2000 certified facilities.

TESTING

Prototype testing on every model
- proves computer design
- verifies system torsional stability
- functionality tests every model

Every Caterpillar engine is dynamometer tested under full load to ensure proper engine performance.

FULL RANGE OF ATTACHMENTS

Wide range of bolt-on system expansion attachments, factory designed and tested

UNMATCHED PRODUCT SUPPORT OFFERED THROUGH WORLDWIDE CATERPILLAR DEALER NETWORK

More than 1,500 dealer outlets.
Caterpillar factory-trained dealer technicians service every aspect of your industrial engine.
99.7% of parts orders filled within 24 hours worldwide.
Caterpillar parts and labor warranty.
Preventive maintenance agreements available for repair before failure options.
Scheduled Oil Sampling program matches your oil sample against Caterpillar set standards to determine:
- internal engine component condition
- presence of unwanted fluids
- presence of combustion by-products

WEB SITE

For all your industrial power requirements, visit www.cat-industrial.com.



STANDARD ENGINE EQUIPMENT

746 bkW/1000 bhp @ 1800 rpm

Air Inlet System

Aftercooler core, corrosion resistant coated (air side), Air cleaner, regular duty with service indicators, Turbocharger, rear mounted, jacket water aftercooled

Control System

Governor, RH, 3161 with self contained synthetic oil sump, air-fuel ratio control, mechanical speed control, without torque control, Governor control, positive locking

Cooling System

Thermostats and housing for conventional core radiator, Jacket water pump, gear driven, centrifugal

Exhaust System

Exhaust manifold, dry

Flywheels and Flywheel Housings

Flywheel, SAE No. 0, 151 teeth, Flywheel housing, SAE No. 0, SAE standard rotation

Fuel System

Fuel filter, with service indicators, cartridge type with RH service, Fuel transfer pump

Instrumentation

Instrument Panel, RH, Engine oil pressure gauge, Fuel pressure gauge, Oil filter differential gauge, Jacket water temperature gauge, Service meter, electric, Tachometer

Lube System

Crankcase breather, top mounted, Oil cooler, Oil filler and dipstick, RH, Oil pump, Oil filter, cartridge type with RH service, Shallow oil pan, Fumes disposal (not installed)

Mounting System

Rails, mounting, engine length, 254 mm (10 in), industrial-type, C-channel. Included on selected top level engines.

Power Take-Offs

Accessory drive, upper RH, Front housing, single sided

Protection System

Junction box, Manual shutoff, RH, Safety shutoff protection, energized to shutdown, Low oil pressure, low idle 69 kPa (10 psi); high idle 207 kPa (30 psi), Water temperature, Overspeed, 3161 governor solenoid energized to shutdown

Starting System

Starting switch

General


Paint, Caterpillar Yellow,
Vibration damper and guard,
Lifting eyes



PERFORMANCE CURVES

746 bkW/1000 bhp @ 1800 rpm

IND - C (Intermittent) - TM4728-07

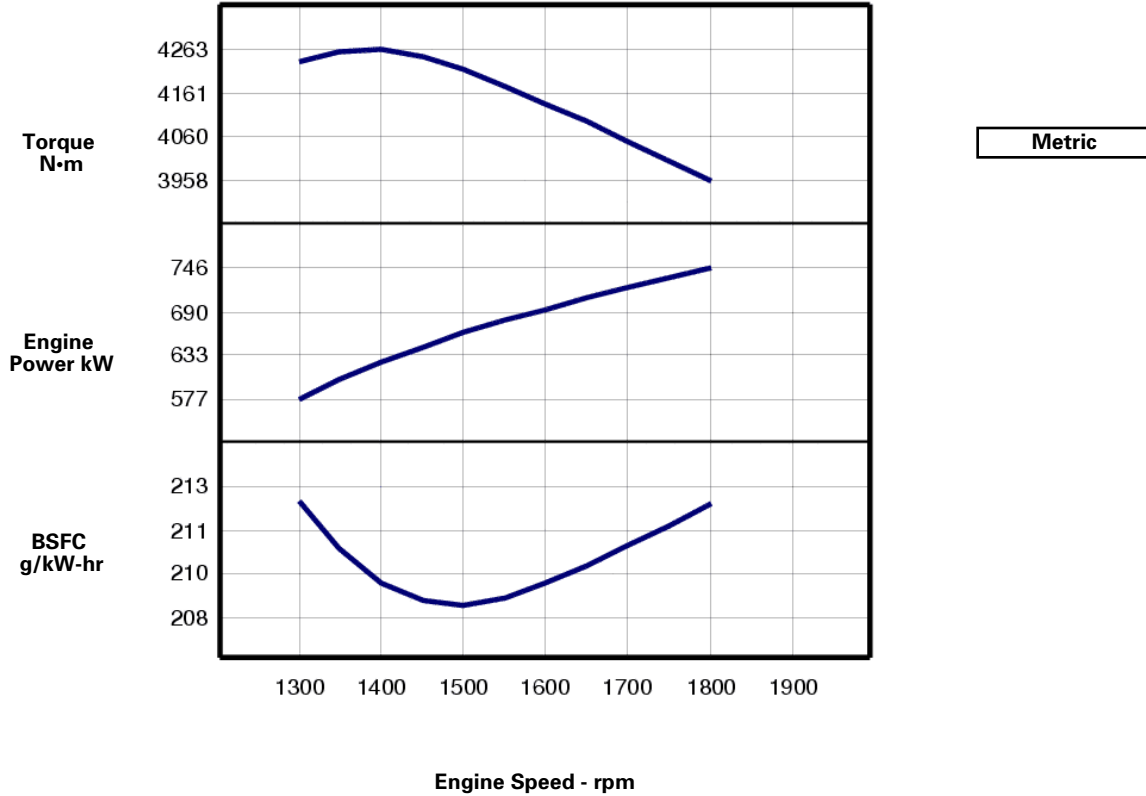


Engine Speed rpm	Engine Power kW	Torque N·m	BSFC g/kW-hr	Fuel Rate L/hr
1800	746	3958	212.5	189.0
1750	734	4005	211.6	185.0
1700	721	4051	210.7	181.0
1650	707	4094	209.9	176.8
1600	693	4136	209.2	172.6
1550	678	4178	208.6	168.4
1500	663	4218	208.3	164.0
1450	645	4246	208.5	159.7
1400	625	4263	209.2	155.2
1350	602	4258	210.6	150.7
1300	577	4236	212.6	146.2



PERFORMANCE CURVES

746 bkW/1000 bhp @ 1800 rpm

IND - C (Intermittent) - TM4728-07

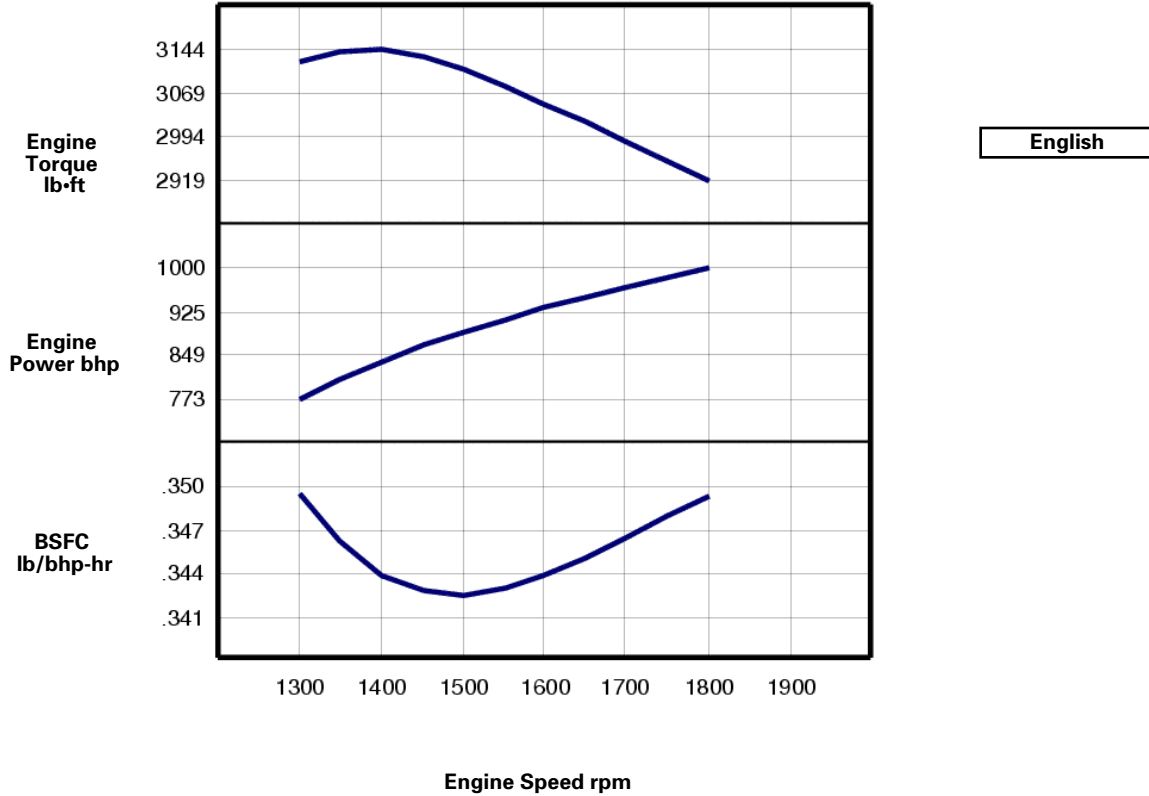

Engine Speed rpm	Engine Power bhp	Engine Torque lb-ft	BSFC lb/bhp-hr	Fuel Rate gal/hr
1800	1000	2919	.349	49.9
1750	984	2954	.348	48.9
1700	967	2988	.346	47.8
1650	949	3020	.345	46.7
1600	929	3051	.344	45.6
1550	909	3082	.343	44.5
1500	888	3111	.342	43.3
1450	865	3132	.343	42.2
1400	838	3144	.344	41.0
1350	807	3141	.346	39.8
1300	773	3124	.350	38.6



RATINGS AND CONDITIONS

746 bkW/1000 bhp @ 1800 rpm

IND - C (Intermittent) Intermittent service where maximum power and/or speed are cyclic. The power and speed capability of the engine can be utilized for one uninterrupted hour followed by one hour of operation at or below IND - A. Time at full load is not to exceed 50% of the duty cycle. Typical service examples are: agricultural tractors, harvesters and combines, off highway trucks, fire pump application power, blast hole drills, rock crushers and wood chippers with high torque rise, and oil field hosting.

Engine Performance Engine performance is corrected to inlet air standard conditions of 99 KPA (29.31 IN HG) dry barometer and 25 deg C (77 deg F) temperature. These values correspond to the standard atmospheric pressure and temperature as shown in SAE J1995.

Performance measured using a standard fuel with fuel gravity of 35 degrees API having a lower heating value of 42,780 KJ/KG (18,390 BTU/LB) when used at 29 DEG (84.2 DEG F) where the density is 838.9 G/L (7.001 LB/US GAL).

The corrected performance values shown for Caterpillar engines will approximate the values obtained when the observed performance data is corrected to SAE J1995, ISO 3046-2 and 8665 and 2288 and 9249 and 1585, EEC 80/1269 and DIN 70020 standard reference conditions.

Engine Dimensions	
(1) Length	2135.8 mm (84.09 in)
(2) Width	1703.0 mm (67.05 in)
(3) Height	1719.6 mm (67.7 in)

Note: Do not use for installation design. See general dimension drawings for detail (Drawing # 7W5874).

Performance Number: TM4728-07

Feature Code: 508DI02 Arr. Number: 4W0280

Materials and specifications are subject to change without notice.
16304851

© 2012 Caterpillar

All rights reserved.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.