



834G Wheel Dozer

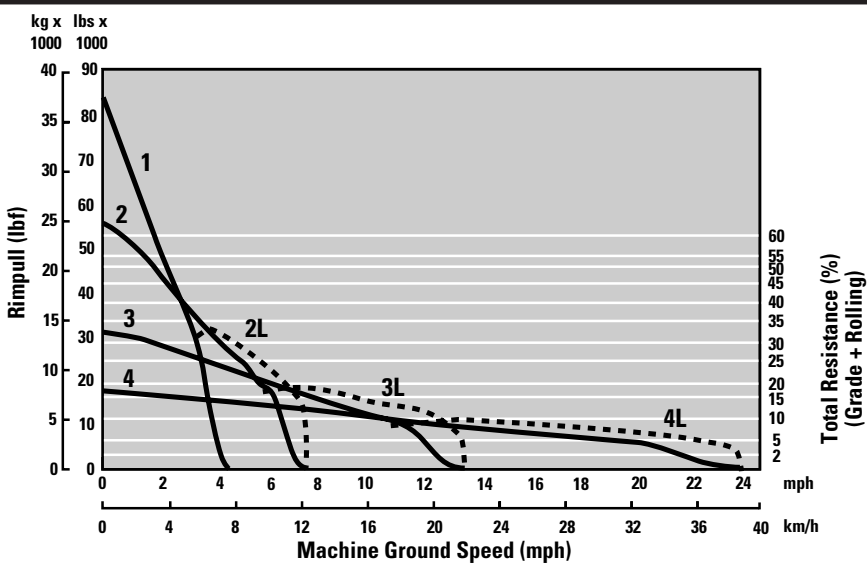

834G Wheel Dozer

Dimensions

All dimensions are approximate.

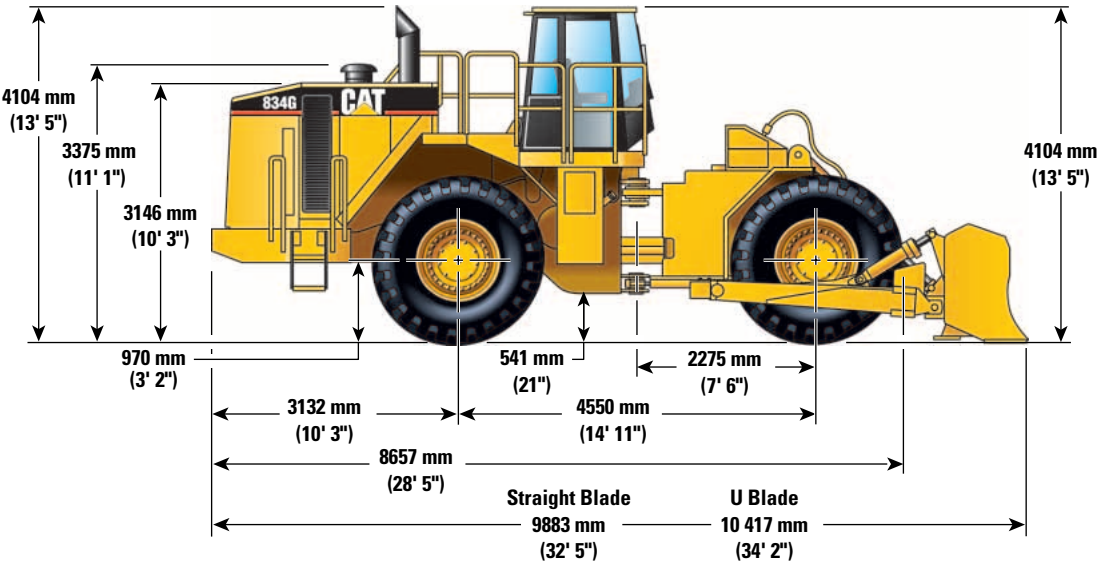

Blade Specifications

Blade Type	Capacity	Overall Width	Height	Digging Depth	Ground Clearance	Maximum Tilt	Weight	Total Operating Weight
Straight Blade	7.90 m ³	5074 mm	1461 mm	557 mm	1279 mm	1270 mm	3196 kg	47 106 kg
	10.33 yd ³	199.8 in	57.5 in	21.9 in	50.4 in	50.0 in	7,047 lb	103,849 lb
Universal Blade	11.13 m ³	5151 mm	1461 mm	557 mm	1279 mm	1270 mm	4554 kg	48 464 kg
	14.56 yd ³	202.8 in	57.5 in	21.9 in	50.4 in	50.0 in	10,042 lb	106,844 lb
Coal Blade	22.2 m ³	5677 mm	1956 mm	465 mm	1178 mm	1482 mm	4290 kg	48 195 kg
	29.0 yd ³	223.5 in	77.0 in	18.3 in	46.4 in	58.3 in	9450 lb	106,252 lb

834G Wheel Dozer

Mandatory Attachments (select one from each group)

Mandatory and optional equipment may vary. Consult your Caterpillar dealer for specifics.

ELECTRICAL

Lighting, standard	0 kg	0 lb
Lights, directional	2 kg	5 lb

POWER TRAIN

Fuel Systems

Fuel arrangement	0 kg	0 lb
Fuel, fast fill	4 kg	8 lb
Heater, fuel	4 kg	8 lb
Fuel, fast fill with heater	7 kg	16 lb

Engines

Engine, standard	0 kg	0 lb
Engine, Jake Brake	4 kg	8 lb

ACCESS STAIRS AND FENDER ARRANGEMENTS

Stairway, standard	0 kg	0 lb
Stairway and fenders	312 kg	687 lb

SOUND SUPPRESSION ARRANGEMENTS

No suppression arrangement	0 kg	0 lb
Sound suppression arrangement	93 kg	206 lb

HYDRAULICS

Steering Systems

Steering, standard	0 kg	0 lb
Steering, secondary	14 kg	30 lb

Filtration Systems

Filtration, standard	0 kg	0 lb
Filtration, case drain	5 kg	12 lb

Optional Equipment

Optional equipment may vary. Consult your Caterpillar dealer for specifics.

ELECTRICAL

Lights, auxiliary package	2 kg	4 lb
---------------------------	------	------

GUARDS

Guards, crankcase	53 kg	117 lb
Guards, hydraulic tank	8 kg	18 lb

OPERATOR ENVIRONMENT

Wiper, intermittent rear	9 kg	2 lb
Visor, front	5 kg	10 lb
Mirror, internal (panoramic)	5 kg	11 lb

POWER TRAIN

Differential, No-SPIN, rear	5 kg	11 lb
Cooler, axle oil	183 kg	403 lb

STARTING AIDS

Heater, engine coolant	2 kg	4 lb
Heater, 220-volt	1 kg	3 lb

MISCELLANEOUS ATTACHMENTS

Oil change, high speed	4 kg	8 lb
Precleaner, turbine/trash	14 kg	30 lb

ANTIFREEZE

Coolant, ext life -50°C (-58° F)	0 kg	0 lb
----------------------------------	------	------

BULLDOZERS

Note: Contact CWTS for coal blade option

Bulldozer AR, no blade	4267 kg	9408 lb
Bulldozer AR, straight blade	7348 kg	16,200 lb
Bulldozer AR, U-blade	9251 kg	20,394 lb