


330C MH Material Handler

Dimensions

All dimensions are approximate.

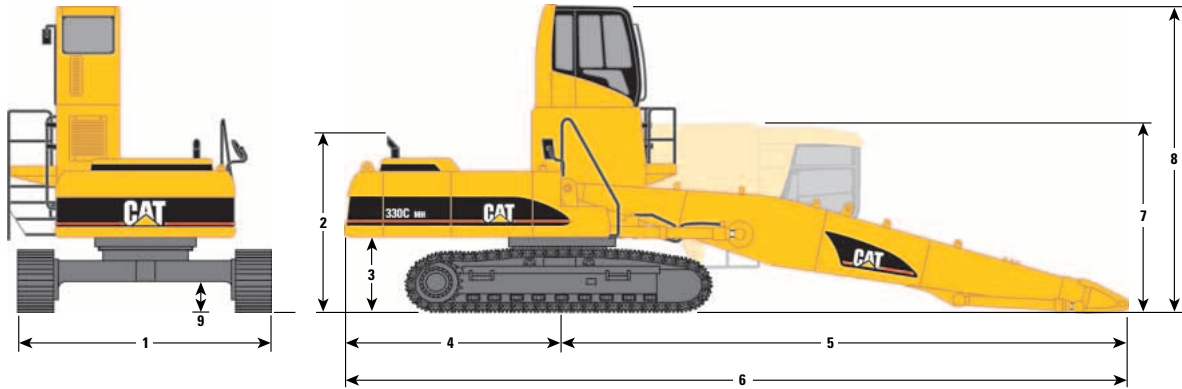

15.9 m (52'2") front

1 Operating Width	4375 mm (14'4")
2 Height to Top of Exhaust	2887 mm (9'6")
3 Counterweight Clearance	1225 mm (4'0")
4 Tail Swing Radius	3500 mm (11'6")
5 Swing Center to End of Boom	9257 mm (30'4")
6 Rear of Carrier to End of Boom	12 744 mm (41'10")
7 Shipping Height – cab tipped	3180 mm (10'5")
8 Operating Height – to top of cab	5078 mm (16'8")
9 Ground Clearance	505 mm (1'8")

Lift Capacities

330C MH

BOOM – 9.2 m (30'2")

STICK – 7.6 m (25'0")

MAX REACH – 15.9 m (52'2")

MAX HEIGHT – 16.4 m (53'10")

Lift Point Height		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		13.5 m/45.0 ft		15.0 m/50.0 ft		Maximum Reach		
		Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft
15.0 m 50.0 ft	kg lb									*4900	*4900									*4800 *10,900	*4800 *10,900	9.1 28.64
13.5 m 45.0 ft	kg lb							*13,600	*13,600	*6600 *13,800	*6600 *13,800	*5000 *9900	*5000 *9900							*4400 *9700	*4400 *9700	10.94 35.13
12.0 m 40.0 ft	kg lb									*7500 *16,100	*7500 *16,100	*6400 *13,400	*6400 *13,400	*4700	*4700					*4100 *9100	*4100 *9100	12.34 39.96
10.5 m 35.0 ft	kg lb									*8300 *18,000	*8300 *18,000	*7400 *15,800	*7400 *15,800	*6000 *12,500	*6000 *12,500					*4000 *8700	*4000 *8700	13.42 43.89
9.0 m 30.0 ft	kg lb									*8500 *19,000	*8500 *19,000	*7700 *16,800	*7700 *16,800	6800 14,600	6300 13,500	*5200 *10,500	5100 *10,500			*3900 *8600	*3900 *8600	14.27 46.58
7.5 m 25.0 ft	kg lb									*8700 *19,000	*8700 *19,000	*7900 *17,100	7800 16,700	6700 14,400	6200 13,300	5500 11,700	5000 10,700			*3900 *8500	*3900 *8500	14.91 48.78
6.0 m 20.0 ft	kg lb							*10 400 *22,600	*10 400 *22,600	*9100 *19,700	*9100 *19,700	*8100 *17,500	7500 16,200	6600 14,100	6000 13,000	5400 11,500	4900 10,600	4500 *9200	4100 8700	*3900 *8600	*3900 *8600	15.39 50.39
4.5 m 15.0 ft	kg lb					*13 400 *29,000	*13 400 *29,000	*11 100 *24,100	*11 100 *24,100	*9500 *20,600	9300 20,000	7900 17,000	7300 15,600	6400 13,700	5800 12,600	5300 11,300	4800 10,300	4400 9400	4000 8600	*4000 *8700	3700 8100	15.70 51.47
3.0 m 10.0 ft	kg lb			*19 600 *42,300	*19 600 *42,300	*14 700 *31,800	*14 700 *31,800	*11 800 *25,600	11 600 25,100	9600 20,700	8800 19,000	7600 16,300	7000 15,000	6200 13,300	5600 12,100	5100 11,000	4700 10,000	4300 9200	3900 8400	3900 8600	3600 7800	15.86 52.04
1.5 m 5.0 ft	kg lb			*14 800 *35,900	*14 800 *35,900	*15 600 *33,800	15 500 32,800	12 000 25,800	10 900 23,500	9100 19,700	8400 18,000	7300 15,700	6700 14,300	6000 12,800	5400 11,700	5000 10,700	4500 9700	4200 9100	3800 8200	3900 8500	3500 7700	15.89 52.12
0.0 m 0.0 ft	kg lb	*3100 *7100	*3100 *7100	*7500 *17,100	*7500 *17,100	*15 800 *33,900	14 200 30,600	11 300 24,400	10 300 22,200	8700 18,800	7900 17,100	7000 15,100	6400 13,700	5800 12,400	5300 11,300	4900 10,400	4400 9500	4100 8900	3800 8100	3800 8500	3500 7700	15.71 51.71
-1.5 m -5.0 ft	kg lb	*3700 *8200	*3700 *8200	*6400 *14,600	*6400 *14,600	*12 800 *29,600	10 900 23,400	9800 21,200	8400 18,100	7600 16,400	6800 14,600	6200 13,300	5600 12,100	5100 11,000	4800 10,200	4300 9300	4100 8800	3700 8000	3900 8600	3500 7800	15.50 50.61	
-3.0 m -10.0 ft	kg lb	*4400 *9800	*4400 *9800	*6500 *14,600	*6500 *14,600	*10 900 *25,000	*10 900 *25,000	10 600 22,800	9600 20,600	8200 17,700	7400 16,000	6600 14,300	6000 12,900	5500 11,900	5000 10,800	4700 10,100	4200 9100	4100 8800	3700 8000	4000 8900	3700 8100	15.10 49.39
-4.5 m -15.0 ft	kg lb			*6900 *15,500	*6900 *15,500	*10 600 *24,000	*10 600 *24,000	*10 100 *21,700	9400 20,300	8100 17,400	7300 15,700	6500 14,100	5900 12,800	5500 11,800	4900 10,700	*4600 *9600	4200 9100			*3700 *8000	*3700 *8000	14.48 47.39
-6.0 m -20.0 ft	kg lb					*9600 *20,600	*9600 *20,600	*8300 *17,700	*8300 *17,700	*7000 *14,900	*7000 *14,900	*5800 *12,300	*5800 *12,300	*4600 *9600	*4600 *9600							

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

330C MH Material Handler

Working Ranges — Two-Piece Front Linkage

Machine equipped with 15.9 m (52'2") two-piece front linkage.

Maximum reach	15.9 m	52'2"
Maximum height	16.4 m	53'10"

