



Cat® TH514C

Telehandler

Specifications

Engine

Model	Cat® C4.4 DITAAC*
Gross Power	74.5 kW/101 hp
Maximum Torque	410 N·m/1,400 rpm
Bore	105 mm
Stroke	127 mm
Displacement	4.4 L

*Meets EEC Stage IIIA and EPA Tier 3 Emission Standards.

Weights

Operating Weight	11 320 kg
------------------	-----------

Operating Specifications

Rated Load Capacity	5000 kg
Maximum Lift Height	
Stabilizers Up	13 300 mm
Stabilizers Down	13 700 mm
Maximum Forward Reach	9225 mm
Top Travel Speed	32 km/h
Load at Max Height	
Stabilizers Up	1800 kg
Stabilizers Down	2000 kg
Load at Max Reach	
Stabilizers Up	500 kg
Stabilizers Down	1200 kg
Outside Turning Radius Over Tires	3920 mm

Service Refill Capacities

Fuel Tank	150 L
Hydraulic Tank	90 L

Tires

Standard	14.00-24 16PR TG-02
----------	---------------------

Brakes

Service Brakes	Servo Assisted on Front Axle
Parking Brakes	Mechanical on Front Axle

Hydraulic System

Maximum System Pressure	250 bar
Maximum Pump Flow	150 L/min
Pump Type	Variable Displacement Load Sensing Axial Piston Pump
Auxiliary Hydraulic Supply	
Intermittent	80 L/min
Continuous	60 L/min

Transmission Speeds

Forward	
1	5.2 km/h
2	10.2 km/h
3	23.3 km/h
4	32 km/h
Reverse	
1	5.2 km/h
2	10.2 km/h
3	23.3 km/h

Boom Performance

Boom Up	13.7 Seconds
Boom Down	14.6 Seconds
Tele In	19.1 Seconds
Tele Out	16.6 Seconds
Crowd Forward (dump)	4.8 Seconds
Crowd Backward	4.7 Seconds
Combined	
Up and Out	28.0 Seconds
Down and In	19.0 Seconds
Drawbar Pull 74.5 kW	96.4 kN
Bucket Breakout Force to ISO 8313	95 kN
Boom Breakout Force	63 kN

Sound


Operator Sound	78 dB(A)
Exterior Sound (74.5 kW Engine)	106 dB(A)




TH514C Telehandler

Dimensions

All dimensions are approximate.

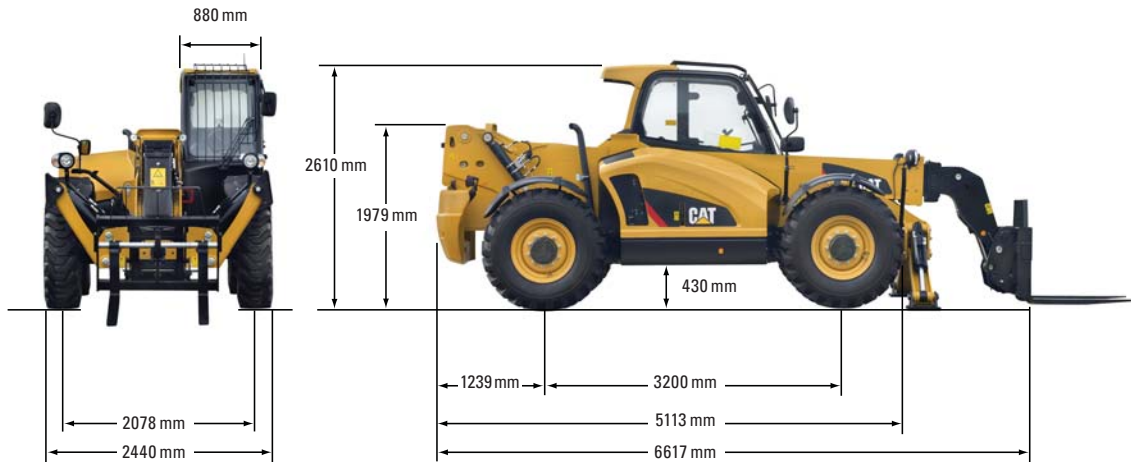

Load Chart and Dimensions

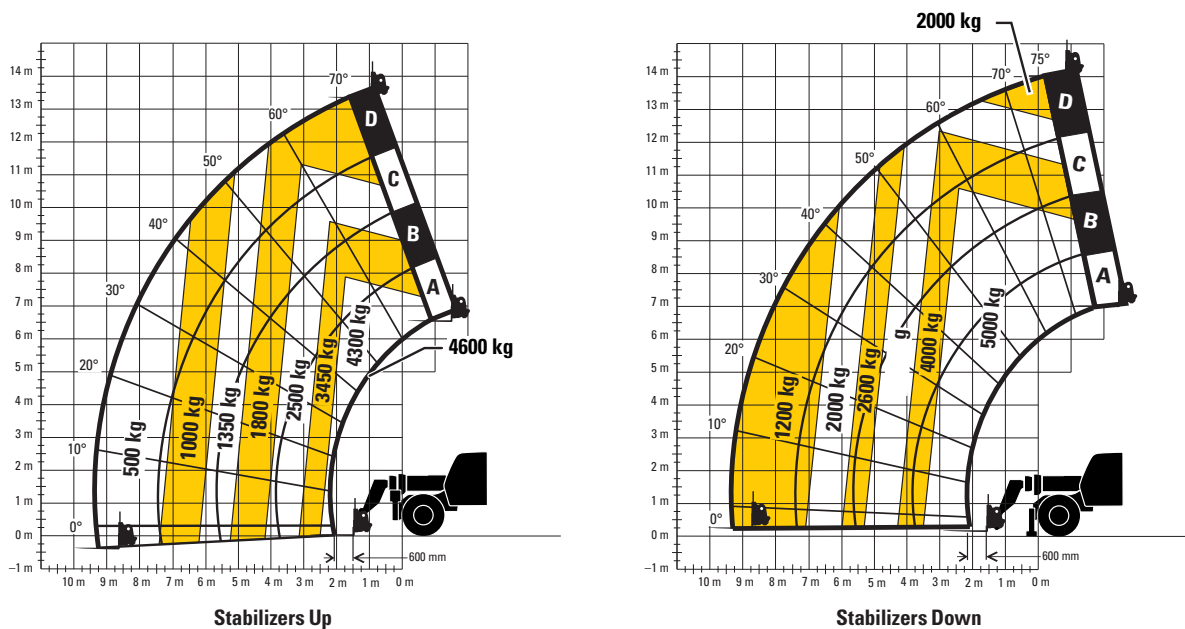

IMPORTANT

Rated lift capacities shown are with machine equipped with carriage and pallet forks. The machine must be level on a firm surface with undamaged, properly inflated tires. Machine specifications and stability are based on rated lift capacities at specific boom angles and boom lengths. (If specifications are critical, the proposed application should be discussed with your dealer.)

DO NOT exceed rated lift capacity loads, as unstable and dangerous machine conditions will result.

DO NOT tip the machine forward to determine the allowable load.

Due to continuous product improvements, machine specifications and/or equipment changes may be made without prior notification.

This machine meets or exceeds AS1418.19-2007 as originally manufactured for intended applications.

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2013 Caterpillar
All rights reserved.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ7173 (11-2013)

