

---

# Diesel Generator Set

---

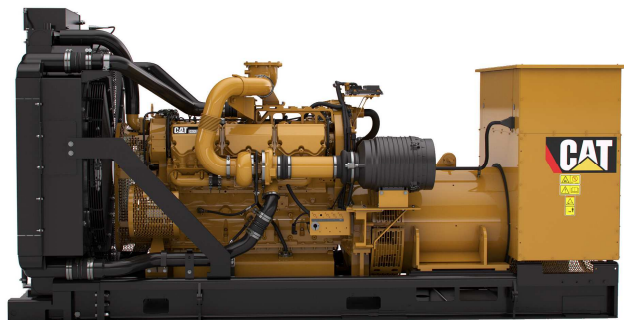


Image shown may not reflect actual package

## CONTINUOUS 830 ekW 1038 kVA 60 Hz 1800 rpm 480 Volts

Caterpillar is leading the power generation Market place with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

---

### FUEL/EMISSIONS STRATEGY

- Low fuel consumption

### DESIGN CRITERIA

- The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response.

### UL 2200

- UL 2200 packages available. Certain restrictions may apply. Consult with your Cat® dealer.

### FULL RANGE OF ATTACHMENTS

- Wide range of bolt-on system expansion attachments, factory designed and tested
- Flexible packaging options for easy and cost effective installation

### SINGLE-SOURCE SUPPLIER

- Fully prototype tested with certified torsional vibration analysis available

### WORLDWIDE PRODUCT SUPPORT

- Cat dealers provide extensive post sale support including maintenance and repair agreements
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries.
- The Cat S•O•S<sup>SM</sup> program effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by products.

### CAT C32 ATAAC DIESEL ENGINE

- Utilizes ACERT™ Technology
- Reliable, rugged, durable design
- Four-stroke diesel engine combines consistent performance and excellent fuel economy with minimum weight

### CAT GENERATOR

- Matched to the performance and output characteristics of Cat engines
- Single point access to accessory connections
- UL 1446 Recognized Class H insulation

### CAT EMCP 4 CONTROL PANELS

- Simple user friendly interface and navigation
- Scalable system to meet a wide range of customer needs
- Integrated Control System and Communications Gateway

# CONTINUOUS 830 ekW 1038kVA

60 Hz 1800 rpm 480 Volts



## Factory Installed Standard & Optional Equipment

| System              | Standard                                                                                                                   | Optional                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Air Inlet           | <ul style="list-style-type: none"><li>• Single element canister type air cleaner with service indicator</li></ul>          | <input type="checkbox"/> Dual element air cleaners                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Cooling             | <ul style="list-style-type: none"><li>• Package mounted radiator</li></ul>                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Exhaust             | <ul style="list-style-type: none"><li>• Exhaust flange outlet</li></ul>                                                    | <input type="checkbox"/> Mufflers                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Fuel                | <ul style="list-style-type: none"><li>• Secondary fuel filters</li><li>• Fuel cooler</li><li>• Fuel priming pump</li></ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Generator           | <ul style="list-style-type: none"><li>• Matched to the performance and output characteristics of Cat engines</li></ul>     | <input type="checkbox"/> Oversize & premium generators<br><input type="checkbox"/> Permanent magnet excitation (PMG)<br><input type="checkbox"/> Internal excitation (IE)<br><input type="checkbox"/> Winding temperature detectors<br><input type="checkbox"/> Anti-condensation space heaters                                                                                                                                                                         |
| Power Termination   | <ul style="list-style-type: none"><li>• Bus bar</li></ul>                                                                  | <input type="checkbox"/> Circuit breakers, UL listed<br><input type="checkbox"/> Circuit breakers, IEC listed<br><input type="checkbox"/> Bottom cable entry<br><input type="checkbox"/> Right, left, and/or rear power termination                                                                                                                                                                                                                                     |
| Governor            | <ul style="list-style-type: none"><li>• ADEM™ A4</li></ul>                                                                 | <input type="checkbox"/> Load share module                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Control Panel       | <ul style="list-style-type: none"><li>• EMCP 4</li></ul>                                                                   | <input type="checkbox"/> EMCP 4.2<br><input type="checkbox"/> EMCP 4.3<br><input type="checkbox"/> EMCP 4.4<br><input type="checkbox"/> Local & remote annunciator modules<br><input type="checkbox"/> Digital I/O Module<br><input type="checkbox"/> Generator temperature monitoring & protection                                                                                                                                                                     |
| Mounting            |                                                                                                                            | <input type="checkbox"/> Rubber vibration isolators<br><input type="checkbox"/> Spring type vibration isolator<br><input type="checkbox"/> IBC seismic isolators                                                                                                                                                                                                                                                                                                        |
| Starting / Charging | <ul style="list-style-type: none"><li>• 24 volt starting motor(s)</li><li>• Battery disconnect switch</li></ul>            | <input type="checkbox"/> Battery charger<br><input type="checkbox"/> Charging alternator<br><input type="checkbox"/> Batteries with rack<br><input type="checkbox"/> Oversize batteries<br><input type="checkbox"/> Heavy duty starting motors<br><input type="checkbox"/> Barring device (manual)<br><input type="checkbox"/> Jacket water heater                                                                                                                      |
| General             | <ul style="list-style-type: none"><li>• Paint – Caterpillar Yellow except rails and radiators gloss black</li></ul>        | <input type="checkbox"/> UL 2200 listed<br><input type="checkbox"/> CSA Certification<br><input type="checkbox"/> Sound attenuated enclosure<br><input type="checkbox"/> 12 hour sub base fuel tank<br><input type="checkbox"/> 24 hour sub base fuel tank<br><input type="checkbox"/> 48 hour sub base fuel tank<br><input type="checkbox"/> Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, IBC 2012, CBC 2007, CBC 2010 |

# CONTINUOUS 830 kW 1038kVA

60 Hz 1800 rpm 480 Volts



## SPECIFICATIONS

### CAT GENERATOR

|                                         |                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------|
| Frame .....                             | 1402                                                                            |
| Excitation .....                        | PM                                                                              |
| Pitch.....                              | 0.6667                                                                          |
| Number of poles.....                    | 4                                                                               |
| Number of leads.....                    | 6                                                                               |
| Number of bearings .....                | Single Bearing                                                                  |
| Insulation .....                        | Class H                                                                         |
| IP rating .....                         | Drip proof IP23                                                                 |
| Over speed capability - % of rated..... | 125%                                                                            |
| Wave form deviation.....                | 2 %                                                                             |
| Voltage regulator.....                  | 3 phase sensing                                                                 |
| Voltage regulation....                  | Less than $\pm 1/2\%$ (steady state)<br>Less than $\pm 1/2\%$ (3% speed change) |

### CAT DIESEL ENGINE

C32 ATAAC, V-12, 4 stroke, water-cooled diesel

|                        |                                  |
|------------------------|----------------------------------|
| Bore .....             | 145.00 mm (5.71 in)              |
| Stroke .....           | 162.00 mm (6.38 in)              |
| Displacement .....     | 32.10 (1958.86 in <sup>3</sup> ) |
| Compression ratio..... | 15.0:1                           |
| Aspiration.....        | ATAAC                            |
| Fuel system.....       | MEUI                             |
| Governor Type.....     | ADEM™ A4                         |

### CAT EMCP 4 CONTROL PANELS

EMCP 4 controls including:

- Run / Auto / Stop Control
- Speed & Voltage Adjust
- Engine Cycle Crank
- Emergency stop pushbutton

EMCP 4.2 controller features:

- 24-volt DC operation
- Environmental sealed front face
- Text alarm/event descriptions

Digital indication for:

- RPM
- DC volts
- Operating hours
- Oil pressure (psi, kPa or bar)
- Coolant temperature
- Volts (L-L & L-N), frequency (Hz)
- Amps (per phase & average)
- Power Factor (per phase & average)
- kW (per phase, average & percent)
- kVA (per phase, average & percent)
- kVAr (per phase, average & percent)
- kW-hr & kVAr-hr (total)

Warning/shutdown with common LED indication of shutdowns for:

- Low oil pressure
- High coolant temperature
- Overspeed
- Emergency stop
- Failure to start (overcrank)
- Low coolant temperature
- Low coolant level

Programmable protective relaying functions:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under Frequency (81 o/u)
- Reverse Power (kW) (32)
- Reverse Reactive Power (kVAr) (32RV)
- Overcurrent (50/51)

Communications

- Customer data link (Modbus RTU)
- Accessory module data link
- Serial annunciator module data link
- 6 programmable digital inputs
- 4 programmable relay outputs (Form A)
- 2 programmable relay outputs (Form C)
- 2 programmable digital outputs

Compatible with the following optional modules:

- Digital I/O module
- Local Annunciator
- Remote annunciator
- RTD module
- Thermocouple module

# CONTINUOUS 830 kW 1038kVA

60 Hz 1800 rpm 480 Volts



## Technical Data

| Open Generator Set - 1800 rpm/60 Hz/480 Volts         | DM9941-01                 |                |
|-------------------------------------------------------|---------------------------|----------------|
| Low Fuel Consumption                                  |                           |                |
| Generator Set Package Performance                     |                           |                |
| Genset Power rating @ 0.8 pf                          | 1038 kVA                  |                |
| Genset Power Rating with fan                          | 830 kW                    |                |
| Fuel Consumption                                      |                           |                |
| 100% Load with fan                                    | 218.0 L/hr                | 57.6 Gal/hr    |
| 75% Load with fan                                     | 164.6 L/hr                | 43.5 Gal/hr    |
| 50% Load with fan                                     | 117.3 L/hr                | 31.0 Gal/hr    |
| Cooling System <sup>1</sup>                           |                           |                |
| Air flow restriction (system)                         | 0.12 kPa                  | 0.48 in. water |
| Air flow (max @ rated speed for radiator arrangement) | 987.1 m <sup>3</sup> /min | 34855 cfm      |
| Engine coolant capacity with radiator                 | 403.5 L                   | 106.6 gal      |
| Engine coolant capacity                               | 233.2 L                   | 61.6 gal       |
| Radiator coolant capacity                             | 170.3 L                   | 45.0 gal       |
| Inlet Air                                             |                           |                |
| Combustion air inlet flow rate                        | 71.2 m <sup>3</sup> /min  | 2515.8 cfm     |
| Exhaust System                                        |                           |                |
| Exhaust stack gas temperature (engine out)            | 452.0 °C                  | 845.6 °F       |
| Exhaust gas flow rate                                 | 179.6 m <sup>3</sup> /min | 6341.2 cfm     |
| Exhaust flange size                                   | 203.2 mm                  | 8 in           |
| Exhaust system backpressure (maximum allowable)       | 10 kPa                    | 40.2 in water  |
| Heat Rejection                                        |                           |                |
| Heat rejection to coolant                             | 305.4 kW                  | 17363 Btu/min  |
| Heat rejection to exhaust (total)                     | 789.8 kW                  | 44907 Btu/min  |
| Heat rejection to aftercooler                         | 171.9 kW                  | 9774 Btu/min   |
| Heat rejection to atmosphere from engine              | 129.6 kW                  | 7370 Btu/min   |
| Heat rejection to atmosphere from generator           | 44.6 kW                   | 2539 Btu/min   |
| Alternator <sup>2</sup>                               |                           |                |
| Motor starting capability @30% voltage dip            | 2734 skVA                 |                |
| Frame                                                 | 1402                      |                |
| Temperature Rise                                      | 80 °C                     | 144 °F         |
| Lube System                                           |                           |                |
| Sump refill with filter                               | 99 L                      | 26.2 gal       |
| Emissions (Nominal) <sup>3</sup>                      |                           |                |
| NOx g/hp-hr                                           | 6.26 g/hp-hr              |                |
| CO g/hp-hr                                            | 0.24 g/hp-hr              |                |
| HC g/hp-hr                                            | 0.02 g/hp-hr              |                |
| PM g/hp-hr                                            | 0.02 g/hp-hr              |                |

<sup>1</sup> For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

<sup>2</sup> Generator temperature rise is based on a 40 degree C ambient per NEMA MG1-32. UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics.

<sup>3</sup> Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77°F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

# CONTINUOUS 830 ekW 1038kVA

60 Hz 1800 rpm 480 Volts



## RATING DEFINITIONS AND CONDITIONS

---

### Applicable Codes and Standards:

AS1359, CSAC22.2 No100-04, UL142, UL489, UL869, UL2200, NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528, NEMA MG1-22, NEMA MG1-33, 72/23/EEC, 98/37/EC, 2004/108/EC

**Continuous** – Output available with non-varying load for an unlimited time. Average power output is 70-100% of the continuous power rating. Typical peak demand is 100% of the continuous rated ekW for 100% of the operating hours.

**Ratings** are based on SAE J1349 standard conditions.

These ratings also apply at ISO3046 standard conditions

**Fuel Rates** are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.).

Additional ratings may be available for specific customer requirements, contact your Cat Dealer for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat Dealer.

# CONTINUOUS 830 ekW 1038 kVA

60 Hz 1800 rpm 480 Volts



## DIMENSIONS

---

| Package Dimensions |         |           |
|--------------------|---------|-----------|
| Length             | 4248 mm | 167.3 in  |
| Width              | 2011 mm | 79.2 in   |
| Height             | 2174 mm | 85.6 in   |
| Weight             | 6910 kg | 15233 lbs |

NOTE: For reference only - do not use for installation design. Please contact your local dealer for exact weight and dimensions.

Performance No: DM9941-01

Feature Code: C32DR39

Gen. Arr. Number: 432-6118

Sourced: U.S. Sourced

LEHE0530-00 (5/14)

[www.Cat-ElectricPower.com](http://www.Cat-ElectricPower.com)

©2014 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, SAFETY.CAT.COM their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.