



# D4G Track-Type Tractor

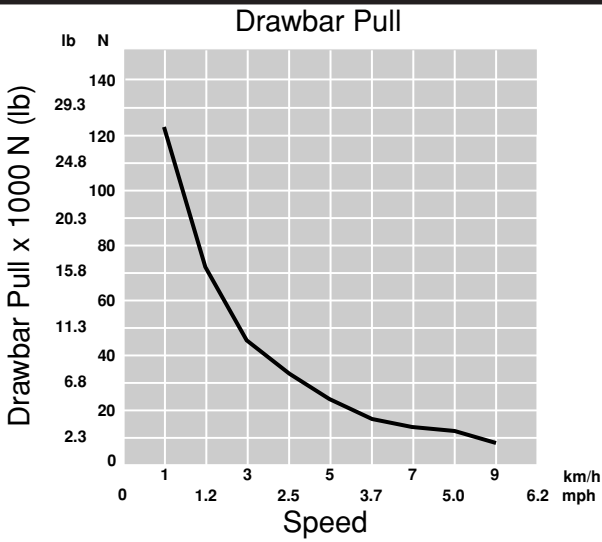

# D4G Track-Type Tractor

## Dimensions

All dimensions are approximate.

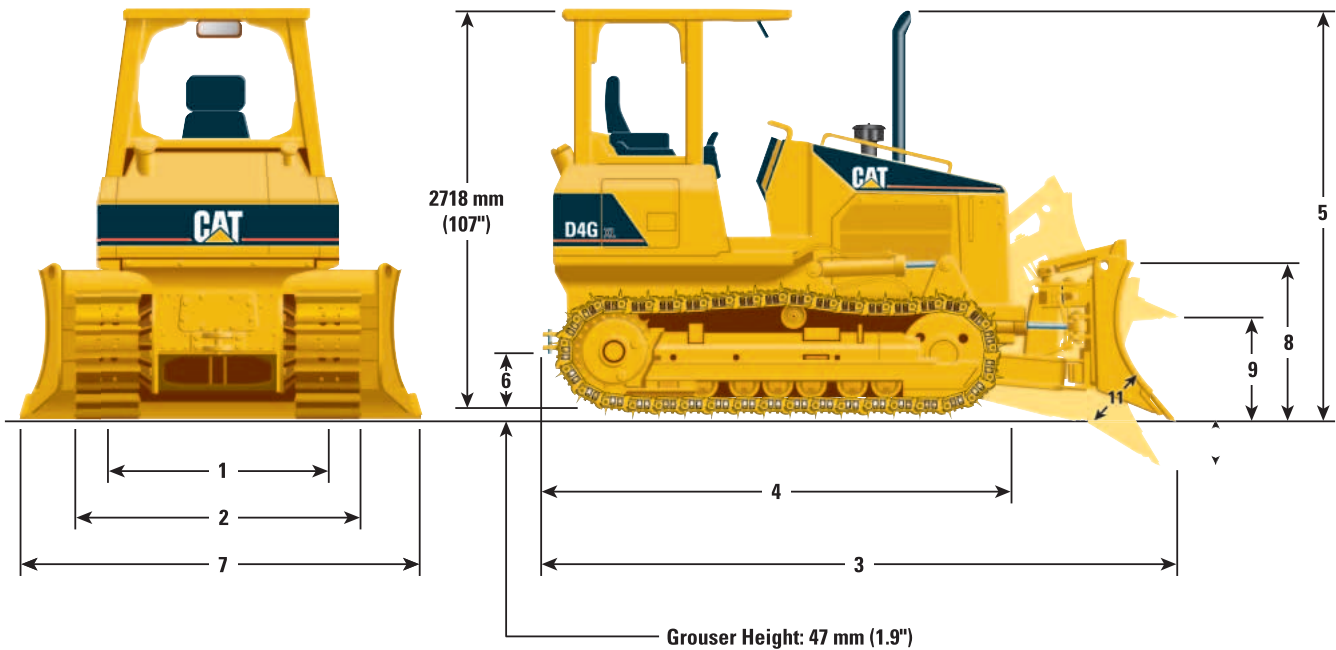

	XL	LGP
1 Track gauge	1499 mm (59")	1676 mm (66")
2 Width of tractor (std shoes, no blade)	1959 mm (77.1")	2311 mm (91")
3 Overall length (w/blade)	4035 mm (158.9")	4035 mm (158.9")
4 Length of basic tractor (w/o blade)	3103 mm (122.2")	3103 mm (122.2")
5 Tractor height	2765 mm (108.9")	2765 mm (108.9")
6 Ground clearance	374 mm (14.7")	374 mm (14.7")

BLADE			
	XL	Intermediate	LGP
7 Blade width	2671 mm (105.2")	2921 mm (115")	3146 mm (123.9")
8 Blade height	1028 mm (40.5")	922 mm (36.3")	922 mm (36.3")
9 Blade lift height	686 mm (27")	733 mm (28.9")	733 mm (28.9")
10 Digging depth	568 mm (22.4")	521 mm (20.5")	521 mm (20.5")
11 Blade cutting edge angle, adjustable	50° to 55°	50° to 55°	50° to 55°
Maximum tilt	387 mm (15.2")	423 mm (16.7")	456 mm (18")
Maximum angle (either side)	25°	25°	25°
Blade width at maximum angle	2438 mm (96")	2666 mm (105")	2871 mm (113")
Blade capacity (SAE)	1.92 m³ (2.51 yd³)	1.69 m³ (2.21 yd³)	1.84 m³ (2.41 yd³)

# D4G Track-Type Tractor

## Optional Equipment (with approximate change in operating weight)

Optional equipment may vary. Consult your Caterpillar dealer for specifics.

	kg	lb
AccuGrade installation arrangement	31	68
Blade, variable pitch, power angling & tilt		
XL, 1.91 m³ (2.50 yd³), 105" width	587	1,294
Intermediate, 1.68 m³ (2.20 yd³), 115" width	606	1,335
LGP, 1.83 m³ (2.39 yd³), 124" width	647	1,426
1.43 m³ (1.87 yd³), 97" width	503	1,110
Cab, ROPS, includes air conditioner, comfort seat (cloth), 90 amp alternator	403	889
Cab, ROPS, logging, includes screens and polycarbonate door windows, air conditioner, comfort seat (cloth), 90 amp alternator	606	1,335
Counterweight, front	289	636
Counterweight, idler mounted	136	300
Drawbar, towing	13	29
Drive, auxiliary	11	23
Guards		
Rock, idler (for use with counterweight)	21	46
Rock, idler (for use without counterweight)	15	32
Track roller	78	171
Heater, engine coolant	0.45	1
Heater, ROPS canopy	33	73
Heavy duty grill	16	35
Hydraulic arrangement		
4-valve, 1-lever dozer control, for use with ripper	12	26
4-valve, 1-lever dozer control, for use with winch	12	26

	kg	lb
Lights		
ROPS, canopy, two front, one rear	4	8
ROPS, cab, two front, one rear	7	16
Machine Security System	3	7
Product Link	8	18
Radiator grid, sandblast	12	27
Ripper, parallelogram, includes three shanks and teeth	563	1,241
Screens		
Front and door, for use with ROPS canopy	91	200
Rear, for use with ROPS canopy	23	51
Rear, for use with ROPS cab	24	52
Side, for use with ROPS canopy	41	90
Side, for use with ROPS cab	46	102
Sound suppression, exterior	40	88
Starting aid, ether	4	9
Sweeps, logging	133	293
Tracks		
25" self cleaning, sealed and lubricated track	181	400
Winch		
Installation, includes pump, lines, filter and control lever	69	152
Winch, variable speed	610	1,345
Fairlead (3-roller) for winch	120	265
4th roller kit for fairlead	17	38