



D3G Track-Type Tractor

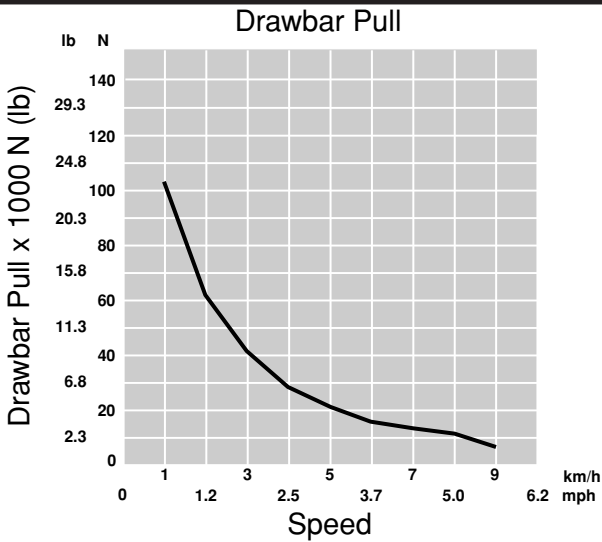

D3G Track-Type Tractor

Dimensions

All dimensions are approximate.

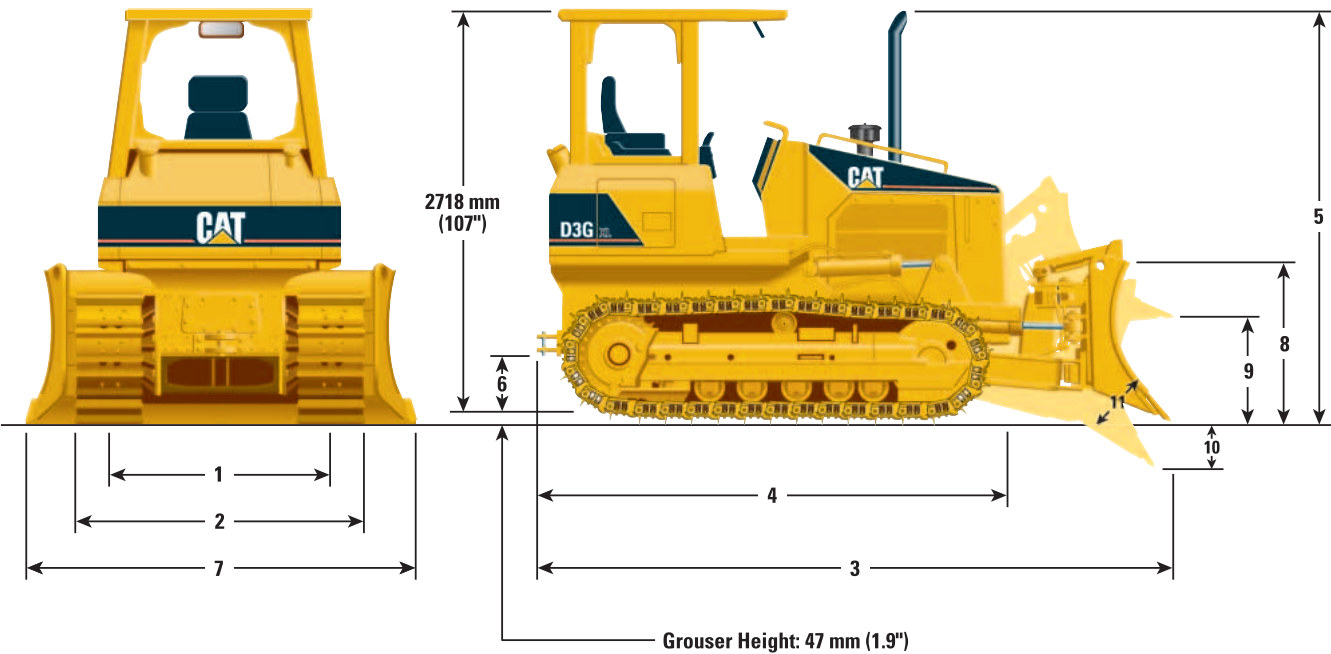

	XL	LGP
1 Track gauge	1448 mm (57")	1676 mm (66")
2 Width of tractor (std shoes, no blade)	1854 mm (73")	2311 mm (91")
3 Overall length (w/blade)	4020 mm (158.3")	4017 mm (158.1")
4 Length of basic tractor (w/o blade)	3103 mm (122.2")	3103 mm (122.2")
5 Tractor height	2765 mm (108.9")	2765 mm (108.9")
6 Ground clearance	374 mm (14.7")	374 mm (14.7")

BLADE			
	XL	Intermediate	LGP
7 Blade width	2461 mm (96.9")	2921 mm (115")	3146 mm (123.9")
8 Blade height	936 mm (36.8")	843 mm (33.2")	843 mm (33.2")
9 Blade lift height	688 mm (27.1")	695 mm (27.4")	695 mm (27.4")
10 Digging depth	554 mm (21.8")	527 mm (20.7")	527 mm (20.7")
11 Blade cutting edge angle, adjustable	50° to 55°	50° to 55°	50° to 55°
Maximum tilt	369 mm (14.5")	423 mm (16.7")	456 mm (18")
Maximum angle (either side)	25°	25°	25°
Blade width at maximum angle	2247 mm (88.5")	2666 mm (105")	2871 mm (113")
Blade capacity (SAE)	1.44 m³ (1.88 yd³)	1.42 m³ (1.86 yd³)	1.53 m³ (2.0 yd³)

D3G Track-Type Tractor

Optional Equipment (with approximate change in operating weight)

Optional equipment may vary. Consult your Caterpillar dealer for specifics.

	kg	lb
AccuGrade installation arrangement	31	68
Blade, variable pitch, power angling & tilt		
XL, 1.43 m ³ (1.87 yd ³), 97" width	503	1,110
Intermediate, 1.41 m ³ (1.85 yd ³), 115" width	527	1,162
LGP, 1.53 m ³ (2.0 yd ³), 124" width	560	1,234
Cab, ROPS, includes air conditioner, comfort seat (cloth), 90 amp alternator	403	889
Cab, ROPS, logging, includes screens and polycarbonate door windows, air conditioner, comfort seat (cloth), 90 amp alternator	606	1,335
Counterweight, front	289	636
Counterweight, idler mounted	136	300
Drawbar, towing	13	29
Drive, auxiliary	11	23
Guards		
Rock, idler (for use with counterweight)	21	46
Rock, idler (for use without counterweight)	15	32
Track roller	69	153
Heater, engine coolant	0.45	1
Heater, ROPS canopy	33	73
Heavy duty grill	16	35
Hydraulic arrangement		
4-valve, 1-lever dozer control, for use with ripper	12	26
4-valve, 1-lever dozer control, for use with winch	12	26

	kg	lb
Lights		
ROPS, canopy, two front, one rear	4	8
ROPS, cab, two front, one rear	7	16
Machine Security System	3	7
Product Link	8	18
Radiator grid, sandblast	12	27
Ripper, parallelogram, includes three shanks and teeth	563	1,241
Screens		
Front and door, for use with ROPS canopy	91	200
Rear, for use with ROPS canopy	23	51
Rear, for use with ROPS cab	24	52
Side, for use with ROPS canopy	41	90
Side, for use with ROPS cab	46	102
Sound suppression, exterior	43	95
Starting aid, ether	4	9
Sweeps, logging	133	293
Tracks		
14" triple grouser, sealed and lubricated track	-34	-75
25" self cleaning, sealed and lubricated track	175	385
Winch		
Installation, includes pump, lines, filter and control lever	69	152
Winch, variable speed	610	1,345
Fairlead (3-roller) for winch	120	265
4th roller kit for fairlead	17	38