
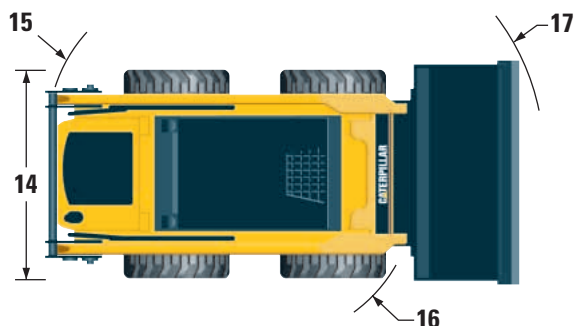


232B/242B Skid Steer Loaders

Dimensions

All dimensions are approximate.

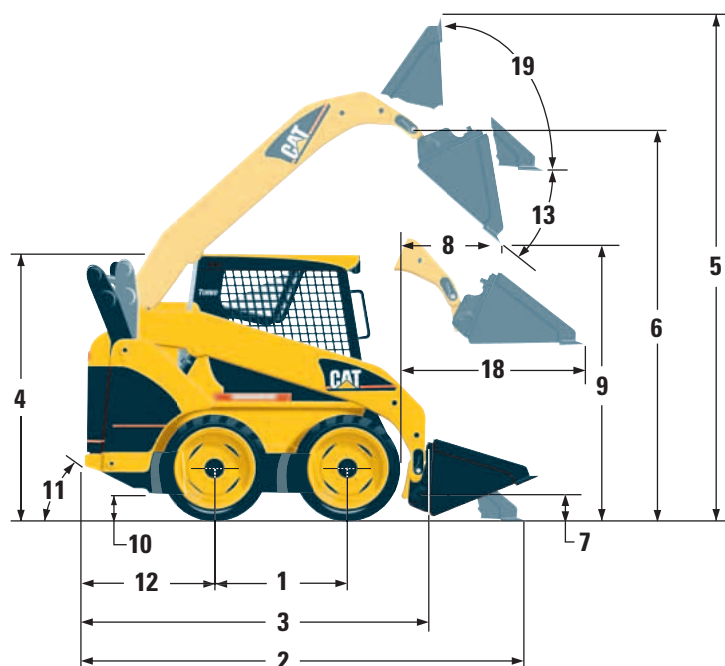

1	Wheelbase		
	- 232B/242B	1094 mm	43 in
2	Length w/Bucket on ground		
	- 232B/242B	3437 mm	135 in
3	Length w/o Bucket		
	- 232B/242B	2760 mm	109 in
4	Height to top of Cab		
	- 232B	1953 mm	77 in
	- 242B	1986 mm	78 in
5	Max Overall Height		
	- 232B	3894 mm	153 in
	- 242B	3926 mm	155 in
6	Hinge Pin Height at max lift		
	- 232B	3013 mm	119 in
	- 242B	3045.5 mm	120 in
7	Hinge Pin Height at carry position		
	- 232B	247 mm	10 in
	- 242B	299 mm	12 in
8	Reach at max lift and dump		
	- 232B/242B	766 mm	30 in
9	Clearance at max lift and dump		
	- 232B	2243 mm	88 in
	- 242B	2240 mm	88 in
10	Ground Clearance		
	- 232B	145 mm	6 in
	- 242B	178 mm	7 in

11	Departure Angle		
	- 232B/242B	28°	
12	Bumper Overhang behind rear axle		
	- 232B/242B	989 mm	39 in
13	Maximum Dump Angle		
	- 232B/242B	50°	
14	Vehicle Width over tires		
	- 232B	1524 mm	60 in
	- 242B	1676 mm	66 in
15	Turning Radius from center — left		
	- 232B/242B	1545 mm	60.8 in
16	Turning Radius from center — right		
	- 232B/242B	1409 mm	56.5 in
17	Turning Radius from center — full		
	- 232B/242B	2221 mm	87.4 in
18	Max Reach w/Arms Parallel to ground		
	- 232B/242B	1231 mm	48.4 in
19	Rack Back Angle at max height		
	- 232B/242B	86.9°	