


304C CR Mini Hydraulic Excavators

Dimensions and Lift Capacities

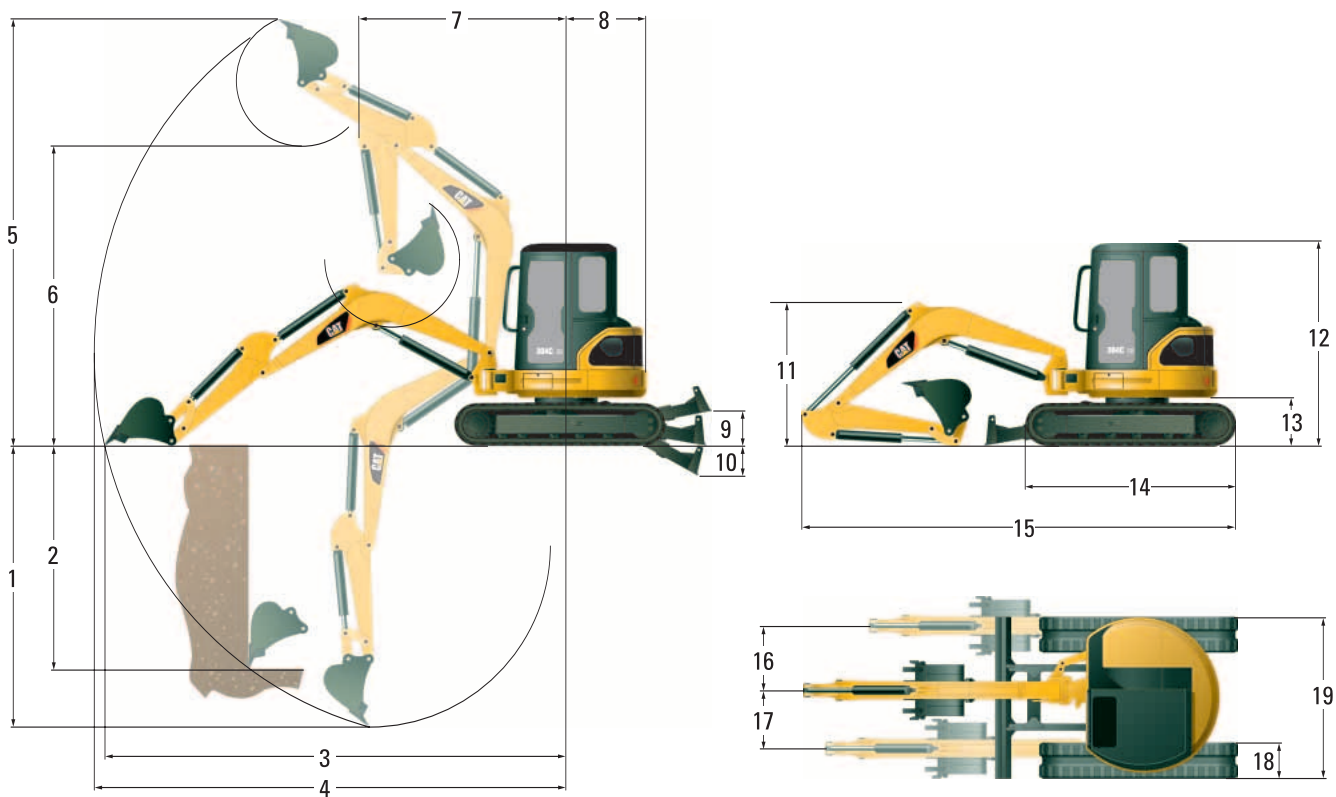

	Standard Stick		Long Stick	
1	3300 mm	10'10"	3690 mm	12'1"
2	2440 mm	8'0"	2760 mm	9'1"
3	5460 mm	17'11"	5830 mm	19'2"
4	5630 mm	18'6"	5990 mm	19'8"
5	5280 mm	17'4"	5480 mm	18'0"
6	3690 mm	12'1"	3900 mm	12'10"
7	2350 mm	7'9"	2530 mm	8'4"
8	1070 mm	3'6"	1070 mm	3'6"
9	420 mm	1'5"	420 mm	1'5"
10	540 mm	1'9"	540 mm	1'9"

	Standard Stick		Long Stick	
11	1730 mm	5'8"	2100 mm	6'11"
12	2550 mm	8'4"	2550 mm	8'4"
13	615 mm	2'0"	615 mm	2'0"
14	2580 mm	8'6"	2580 mm	8'6"
15	5170 mm	17'0"	5290 mm	17'4"
16	785 mm	2'7"	785 mm	2'7"
17	695 mm	2'3"	695 mm	2'3"
18	400 mm	1'4"	400 mm	1'4"
19	1980 mm	6'6"	1980 mm	6'6"

With tracks level on the ground.

Track and blade width	1980 mm	6'6"
Gauge width	1580 mm	5'2"
Shoe width	400 mm	1'4"

Lift Capacities at Ground Level	Over Front		Over Side		Over Front		Over Side	
Lift point radius	3000 mm	9'11"	3000 mm	9'11"	5130 mm	16'10"	5130 mm	16'10"
Blade down	2340 kg*	5,160 lb*	1020 kg	2,249 lb	790 kg*	1,742 lb*	450 kg	992 lb
Blade up	1200 kg	2,646 lb	900 kg	1,985 lb	520 kg	1,147 lb	400 kg	882 lb

*Limited by hydraulic capacity rather than tipping load.
The above loads are in compliance with SAE hydraulic excavator lift capacity rating standard SAE J1097 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.
The excavator bucket weight is not included on this chart. Lifting capacities for standard stick.