


303C CR Mini Hydraulic Excavators

Dimensions and Lift Capacities

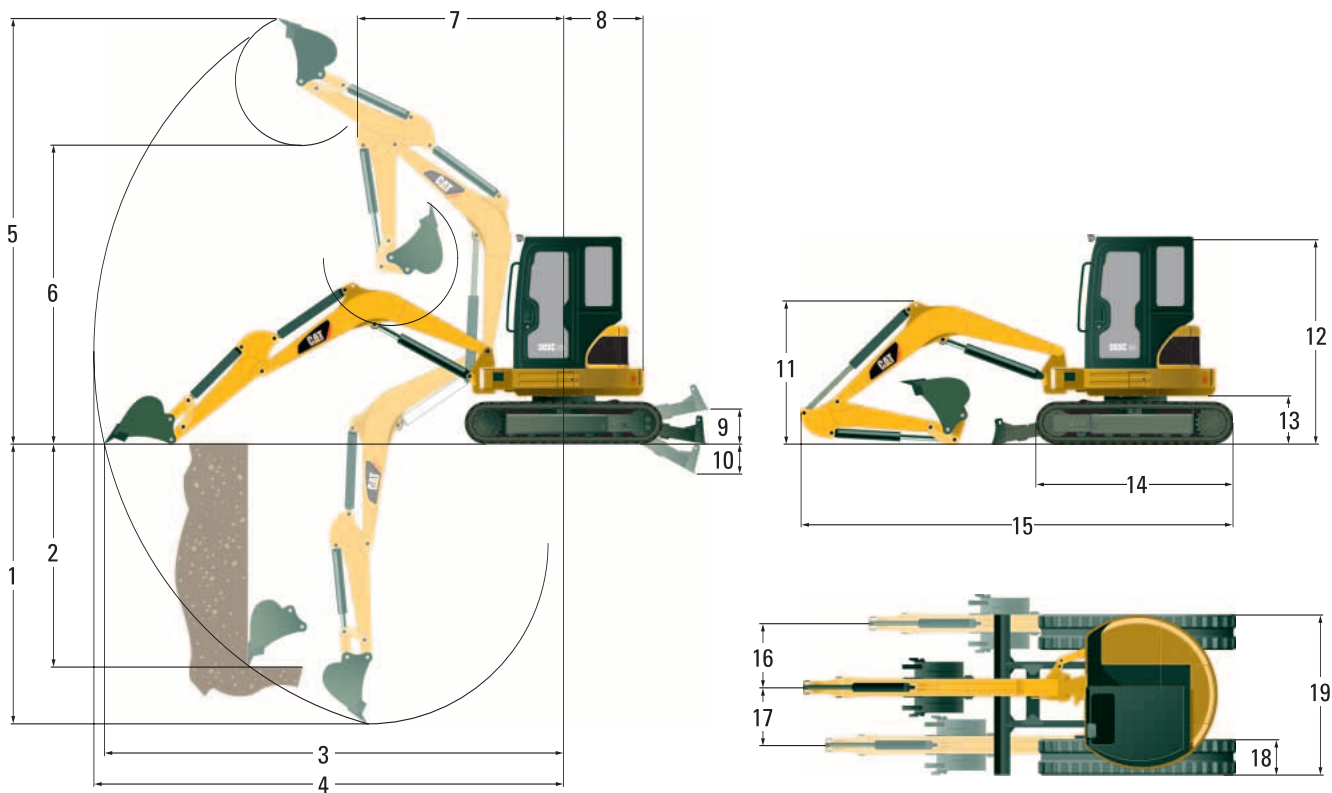

	Standard Stick		Long Stick	
1	2910 mm	9'7"	3200 mm	10'5"
2	2400 mm	7'10"	2550 mm	8'4"
3	5100 mm	16'9"	5350 mm	17'7"
4	5230 mm	17'2"	5470 mm	17'11"
5	4950 mm	16'3"	5060 mm	16'7"
6	3490 mm	11'5"	3610 mm	11'10"
7	2060 mm	6'9"	2180 mm	7'2"
8	890 mm	2'11"	890 mm	2'11"
9	400 mm	1'4"	400 mm	1'4"
10	470 mm	1'7"	470 mm	1'7"

	Standard Stick		Long Stick	
11	1340 mm	4'5"	1450 mm	4'9"
12	2500 mm	8'2"	2500 mm	8'2"
13	565 mm	1'10"	565 mm	1'10"
14	2220 mm	7'3"	2220 mm	7'3"
15	4740 mm	15'6"	4770 mm	15'8"
16	770 mm	2'6"	770 mm	2'6"
17	660 mm	2'2"	660 mm	2'2"
18	300 mm	1'0"	300 mm	1'0"
19	1550 mm	5'1"	1550 mm	5'1"

With tracks level on the ground.

Track and blade width	1550 mm	5'1"
Gauge width	1250 mm	4'1"
Shoe width	300 mm	1'0"

Lift Capacities at Ground Level	Over Front		Over Side		Over Front		Over Side	
Lift point radius	3000 mm	9'8"	3000 mm	9'8"	4800 mm	15'9"	4800 mm	15'9"
Blade down	1410 kg*	3,109 lb*	480 kg	1,058 lb	620 kg*	1,367 lb*	240 kg	529 lb
Blade up	650 kg	1,433 lb	440 kg	970 lb	320 kg	706 lb	210 kg	463 lb

*Limited by hydraulic capacity rather than tipping load.
The above loads are in compliance with SAE hydraulic excavator lift capacity rating standard SAE J1097 and they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.
The excavator bucket weight is not included on this chart. Lifting capacities for standard stick.