


24M Motor Grader

Dimensions

All dimensions are approximate, based on standard machine configuration with 29.5-29 28PR tires.

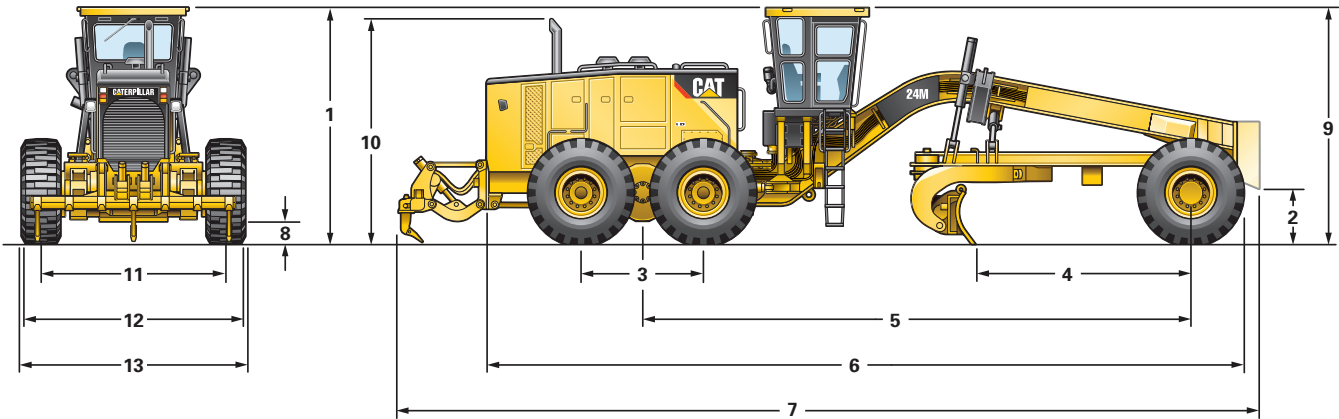

| | | | |
|---|--|-----------|----------|
| 1 | Height – top of cab | 4452 mm | 175.3 in |
| 2 | Height – front axle center | 858 mm | 33.8 in |
| 3 | Length – between tandem axles | 2285 mm | 90 in |
| 4 | Length – front axle to moldboard | 4048 mm | 159.4 in |
| 5 | Length – front axle to mid tandem | 10 278 mm | 404.6 in |
| 6 | Length – front tire to end of rear frame | 14 194 mm | 558.8 in |
| 7 | Length – counterweight to ripper | 16 102 mm | 633.9 in |

| | | | |
|----|-------------------------------|---------|----------|
| 8 | Ground clearance at rear axle | 607 mm | 23.9 in |
| 9 | Height to top of cylinders | 3846 mm | 151.4 in |
| 10 | Height to exhaust stack | 4322 mm | 170.2 in |
| 11 | Width – tire center lines | 3450 mm | 135.8 in |
| 12 | Width – outside rear tires | 4225 mm | 166.3 in |
| 13 | Width – outside front tires | 4280 mm | 168.5 in |