

330D FM

Forest Machine



Engine

Engine Model	Cat® C9 ACERT™	
Net Flywheel Power	200 kW	268 hp

Weights

General Forestry (HW)	41 426 kg	91,344 lb
Log Loader (U/U)	45 801 kg	100,991 lb
Log Loader (O/U)	46 261 kg	102,005 lb

- Operating weight with front linkage, without bucket or grapple.

330D FM Forest Machine

The D Series incorporates innovations for improved performance, rugged durability and maximum productivity.

Power Train

The Cat® C9 with ACERT™ Technology gives the 330D FM exceptional power and fuel efficiency unmatched in the industry. The C9 meets U.S. EPA Tier 3 emissions requirements. **pg. 4**

Hydraulics

Forest Machine hydraulic systems are designed to provide reliability, outstanding controllability and proven performance in various forestry applications. **pg. 5**

Operator Comfort

Spacious purpose built forestry cab with excellent sightlines to the work area with 8 lights and all scratch resistant polycarbonate windows. **pg. 6**

Versatility

Designed and purpose-built to meet diverse forestry applications, the 330D FM can help improve productivity in various forestry and millyard applications. **pg. 11**

Caterpillar® Grapples

Cat® Log Loading Grapples combined with Cat Forest Machines make the 330D FM flexible, versatile and efficient enough, allowing you to maximize productivity on your forestry job. **pg. 12**

Customer Focus

Down time is minimized by the utilization of a worldwide computer network that can help find in-stock parts and minimize your down time. Your Cat dealer can also offer a wide range of other services that can be set up to meet your equipment needs. The dealer will help choose the plan that can cover everything from machine and attachment selection to replacement. **pg. 15**



Structures

Purpose-built carbody design uses the most advanced manufacturing processes, ensuring durability and reliability in the most rugged forestry applications. **pg. 8**

Guarding

Factory forestry cab guarding, shoe support guards and heavy-duty access doors help extend component life, reduces downtime and helps to protect your forestry machine investment. **pg. 9**

Undercarriage

Heavy Duty link assemblies provide toughness and durability. The FM track will maximize undercarriage life and minimize operating costs. **pg. 10**

Owning and Operating Costs

Proven fuel efficiency combined with easier access and extended service intervals maximize uptime, reduce operating costs and maximize productivity. **pg. 13**

Serviceability

The new FM cooling package provides easy access to all radiator cores for faster cleanouts. Regularly scheduled maintenance extends machine service life and lowers overall operating costs. **pg. 14**



Power Train

The Cat® C9 has exceptional power and fuel efficiency unmatched in the industry for consistently high performance in both forestry and millyard applications.



Cat C9 ACERT™. The Cat® C9 with ACERT™ Technology gives the 330D FM exceptional power and fuel efficiency unmatched in the industry. The C9 meets U.S. EPA Tier 3 emissions requirements. The forestry designed hydraulics give the 330D FM exceptional power, efficiency and controllability unequalled in the industry for consistently high performance in all forestry applications.

Performance. The 330D FM, equipped with the C9 engine with ACERT Technology, provides 9% more horsepower as compared to the C9 in the 330D FM.

Automatic Engine Speed Control.

The two-stage, one-touch control maximizes fuel efficiency and reduces sound levels.

ADEM™ A4 Engine Controller.

The ADEM A4 electronic control module manages fuel delivery to get the best performance per liter of fuel used. The engine management system provides flexible fuel mapping, allowing the engine to respond quickly to varying application needs. It tracks engine and machine conditions while keeping the engine operating at peak efficiency.

Electronic Control Module.

The Electronic Control Module (ECM) works as the “brain” of the engine’s control system, responding quickly to operating variables to maximize engine efficiency. Fully integrated with sensors in the engine’s fuel, air, coolant, and exhaust systems, the ECM stores and relays information on conditions such as RPM, fuel consumption, and diagnostic information.

Fuel Delivery. The Cat C9 ACERT features electronic controls that govern the fuel injection system. Multiple injection fuel delivery involves a high degree of precision. Precisely shaping the combustion cycle lowers combustion chamber temperatures, generating fewer emissions and optimizing fuel combustion. This translates into more work output for your fuel cost.

Cooling System. The cooling fan is directly driven from the engine. An optional programmable reversible fan allows for radiator blowout, to increase service intervals and to maintain engine operational temperatures. The optimum fan speed is calculated based on the target engine speed, coolant temperature, hydraulic oil temperature and actual fan speed. The Cat C9 ACERT delivered a completely new layout that separates the cooling system from the engine compartment.

Air Cleaner. The radial seal air filter features a double-layered filter core for more efficient filtration and is located in a compartment behind the cab. A warning is displayed on the monitor when dust accumulates above a preset level.

Noise Reduction Technologies.

The engine mounts are rubber-isolating mounts matched with the engine package. Further noise reduction has been achieved through design changes to the isolated top cover, oil pan, multiple injection strategy, insulated timing cover, sculpted crankcase and gear train refinements.

Hydraulics

Cat® hydraulics provide the power and control needed for a variety of applications.

Component Layout. The 330D FM hydraulic system and component locations have been designed to provide a high level of system efficiency. The main pumps, control valves and hydraulic tank are located close together to allow for shorter tubes and lines between components that reduce friction loss and pressure drops in the lines. The layout further provides greater operator comfort by placing the radiator on the cab side of the upper structure.

This allows incoming air to enter the engine compartment from the operator side and hot air and corresponding engine sound to exit on the opposite side away from the operator. This reduces engine compartment heat and sound being transmitted to the operator.

Pilot System. The pilot pump is independent from the main pumps and controls the front linkage, swing and travel operations.

Hydraulic Cross Sensing System. The hydraulic cross sensing system improves productivity with faster implement speeds and quicker, stronger pivot turns.

Boom and Stick Regeneration Circuit. Boom and stick regeneration circuit saves energy during boom-down and stick-in operation which increases efficiency, reduces cycle times and pressure loss for higher productivity, lower operating costs and increased fuel efficiency.

Fine Swing Control. Standard fine swing control cushions start and stop for better implement control.



Controllability. The hydraulic system offers precise control to the 330D FM reducing operator fatigue, improving operator effectiveness and efficiency, which ultimately translates into enhanced performance.

Auxiliary Hydraulic Valve. The auxiliary valve is standard on the 330D FM. Control Circuits are available as attachments, allowing for operation of high and medium pressure tools such as grapples.

Hydraulic Cylinder Snubbers. Snubbers are located at the rod-end of the boom cylinders and both ends of the stick cylinders to cushion shocks, reduce sound and increase cylinder life, increasing uptime and productivity.

Operator Comfort

The purpose built forestry cab interior layout maximizes operator space, provides exceptional comfort, provides excellent sightlines and reduces operator fatigue.



Operator Station. The workstation is spacious, quiet and comfortable, assuring high productivity during a long work day. Controls, joysticks and an ergonomically designed seat reduces operator fatigue.

Pre-Start Check. Prior to starting the machine, the system will check for low fluid levels for the engine oil, hydraulic oil and engine coolant and warn the operator through the monitor in the event display area.



Monitor. The monitor is a full color 400 × 234 pixels Liquid Crystal Display (LCD) graphic display. The monitor angle can be adjusted to minimize sun glare and has the capability of displaying information 27 different languages.

Gauge Display. Three analog gauges, fuel level, hydraulic oil temperature and coolant temperature, are displayed in this area.

Event Display. Machine information is displayed in this area with the icon and language.

Multi-Information Display. This area is reserved for displaying various information which is convenient for the operator. The “Cat” logo is displayed when no information is available to be displayed.



Seat. Seat provides a variety of adjustments to suit the operator's size and weight including fore/aft, height and weight. Wide adjustable armrests and a retractable seat belt are also included.



Joystick Control. Joystick controls have low lever effort and are designed to match the operator's natural wrist and arm position. The operator can operate joystick controls with an arm on the armrest and the horizontal and vertical strokes have been designed to reduce operator fatigue. Exclusive proportional control and push buttons are programmable to operator personal preferences, allowing maximum productivity.

Hydraulic Activation Control Lever. For added safety, this lever must be in the operate position to activate the machine control functions.



Console. Redesigned consoles feature a simple, functional design to reduce operator fatigue, ease of switch operation and excellent visibility.



Skylight. An enlarged skylight with sunshade provides excellent upwards visibility.



Viewing. Cab design optimizes post structures, and scratch-resistant polycarbonate window placement to provide excellent operator visibility to front, sides and rear. Forestry cab is designed with heavy-duty guarding, meeting FOPS/OPS/FOGS/TOPS and CB requirements.

Structures

Purpose-built forest applications with reinforced carbody, rugged swing bearing, heavy doors and extra guarding.



Rugged main frame design maximizes durability.

- Outer frame utilizes curved side rails, which are di-formed for excellent uniformity and strength.
- Box-section channels improve upper frame rigidity under the cab.

- Inverted U-channels span the width of the main frame and are formed, rather than fabricated, for superior strength and reduced weight.
- Boom tower and main rails are constructed of solid, high-tensile strength, steel plates.

- Boom foot and engine mount areas are reinforced for additional strength.
- Sheet metal supporting structure is improved by integrating the mounting into the upper frame structure.

Carbody Design. Advanced, reinforced, purpose-built carbody design stands up in the toughest forest applications.

Carbody Structure. Wide, tall, and thick carbody structure provides operating stability and durability while improving operation's effectiveness.

- Upper structure weight and stresses are distributed evenly across the full length of the track roller frame.
- Smooth transitions and long welds help reduce stresses at the carbody-to-roller frame junctions for excellent durability.
- Robot welding helps ensure consistent, high-quality welds throughout the manufacturing process.

Guarding

Caterpillar guarding protects your forestry machine investment.



Shoe Support Guards. Standard full length track shoe support guards help protect rollers and provide increased rigidity to track links in rough underfoot conditions.

Factory Forestry Cab. Caterpillar factory forestry designed and built FOPS cab has options for windshield guard and window guards to meet local guarding requirements. The right side and rear windows are made from impact resistant polycarbonate.

Heavy-Duty Access Doors. Heavy-duty access doors are standard on the 330D FM and are made from 6 mm (0.24 in), high-strength, low alloy steel. Positive locking latch stays closed in forestry applications. Hinges have larger diameter pins over standard doors. The smooth door profile enhances machine appearance.

Undercarriage

Durable undercarriage absorbs stresses and provides excellent stability.



Heavy-Duty Top Rollers. Track rollers with dual supports replace carrier rollers to assure superior endurance.



Heavy-Duty Track Rollers. Heavy-duty track rollers stand up to the toughest forest applications. Features include greater sealability, higher resistance to deformation and greater load carrying capacity.

Heavy-Duty Grease Lubricated Track. The 345 HD Track Link with 216 mm (8.5 inch) pitch and 9 bottom rollers is standard on the 330D FM.

1) Grease Lubricated Track.

- Extends internal bushing wear life
- Reduces noise
- Provides more usable horsepower because of decreased internal friction
- Reduces chance for frozen track joints

2) 10% Larger Bushing Diameter.

- Extends external bushing wear life

3) Greased Pin and Larger Bushing Combined.

- Extends system life
- Reduces sprocket wear because the system stays matched longer
- Improves balance in component wear life

4) 15% Increase in Link Height.

- Increases link wear life

5) 36% Wider Bushing Strap.

- Improves bushing-to-link retention

6) Unique Pin Retention System.

- Locks the pin to the link

Versatility

A wide selection of Forest Machine configurations meet diverse forestry applications and improve your productivity.

The Caterpillar Log Loader is Purpose Built. The Caterpillar log loader is purpose built for forest applications. Completely assembled, heel-type log loaders (including grapple) are available from the factory.



The Caterpillar Heel-Type Loader Arrangements. The Caterpillar heel-type loader arrangements fit a wide variety of log handling and loading applications in the woods and millyards. Heel booms are especially well-suited for use with large diameter sawlogs and tree length loads.



Caterpillar Roadbuilders. Caterpillar Roadbuilders can be equipped with buckets, thumbs, clamshells and clearing grapples to fit a wide range of forest road jobs.



Applications Include. Moving right-of-way logs, stumping, pioneering, stripping organic material, excavating shot rock, truck loading, back sloping, ditching, finish grading and slash piling.

Butt-N-Top. The 330D FM can be shipped from the factory with an optional hydraulic arrangement and controls for AEM Butt-N-Top grapple installation, and a 11.3 m (37 foot) front ready for AEM installed rear entry cab.

Caterpillar Grapples

Caterpillar Forest Machines combined with Cat Log Loading Grapples mean optimal performance, reliability and on-the-job productivity.



Cat 360 Degree Continuous Rotating Log Loader Grapples. Cat 360 Degree Continuous Rotating Log Loading Grapples for Forestry Machines are high capacity tools, built for endurance in high-volume logging applications. GLL grapple legs are made of high-strength alloy steel with unique leg profiles for maximum performance in picking/sorting, bunching/loading or shoveling applications. Large bunches of stems or single large logs are easily handled by the wide grapple opening 1524 mm (60 inch), while interlocking legs close down to 127 mm (5 inch) for picking and sorting. Cat grapples have bolt-on access panels allowing for easy serviceability and are backed by the world-class Caterpillar Dealer Network.

360-Degree Continuous Rotation.

High torque hydraulic motor positions the grapple precisely for rapid sorting and loading.

Hydraulic Cylinders. Heavy-duty wall construction delivers durability and maximum closing power move the maximum amount of wood per pass.


Legs. Built with high-strength alloy steel for maximum durability. Optimized profile performs equally well whether sorting, bunching or shoveling.

Pin. Induction-hardened alloy pins float, decreasing wear.

Serviceability. Bolt-on access panels protect the grapples internal components, while providing easy access. Long service intervals and infield servicing result in more uptime and lower operating costs.

GLL Specifications/Dimensions

	GLL52B	GLL55B	GLL60B
Weight (kg/lb)	1255/2,767	1291/2,840	1344/2,965
Width (mm/in)	1725/68	1765/70	1935/76
A Height, open (mm/in)	2134/84	2184/86	2261/89
B Height, closed (mm/in)	2159/85	2210/87	2286/90
C Maximum Opening (mm/in)	1321/52	1397/55	1524/60
D Minimum Opening (mm/in)	127/5	127/5	127/5
Rotation, continuous	360°	360°	360°
Rotation torque at 1,200 psi (N·m/ft lb)	1153/850	1153/850	1153/850

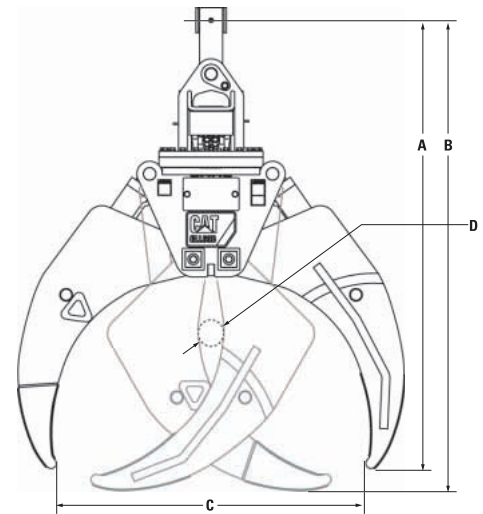

Matching Guide

	GLL52B	GLL55B	GLL60B
320 FM	●	○	
324 FM	●	●	
325 FM	○	●	●
330 FM	○	●	●

- Provides optimum machine match.
- Provides acceptable machine match.

Owning and Operating Costs

Caterpillar Forest Machines provide the best value for your forestry and millyard applications.



ACERT™ Technology Fuel Economy.

Based on Caterpillar testing, the fuel economy of Cat engines with ACERT technology is 3 to 5 percent better than current competing technologies. This fuel economy is directly related to the complete combustion of fuel due to the integration between the electronic control that monitors conditions, the air management system that controls air volume and the fuel injection system that delivers just the right amount of fuel as needed.

Radiator Compartment. The radial air filter has a double layered filter core for more efficient filtration and is located in a compartment behind the cab. Easy access doors allows for easy, faster cleanout minimizing down time. Heavy-duty screen filters assembled on the door keep debris away from the radiator compartment, extending service intervals.

Serviceability

Simplified service and maintenance features save you time and money.



Ground Level Service. The design and layout of the 330D FM was made with the service technician in mind. Many service locations are easily accessible at ground level allowing critical maintenance to get done quickly and efficiently.

Air Filter Compartment. The air filter features a double-element construction for superior cleaning efficiency. When the air cleaner plugs, a warning is displayed on the monitor screen inside the cab.

Pump Compartment. A service door on the right side of the upper structure allows ground-level access to the pump and pilot filter.



Radiator Compartment. The left rear service door allows easy access to the engine radiator, oil cooler and air-to-air aftercooler. A reserve tank and drain cock are attached to the radiator for simplified maintenance.

Grease Lubricated Track. Grease lubricated seals protect the track link and deliver long track pin and bushing inner wear life.



Capsule Filter. The hydraulic return filter, a capsule filter, is situated outside the hydraulic tank. This filter prevents contaminants from entering the system when hydraulic oil is changed and keeps the operation clean.

Fan Guard. Engine radiator fan is completely enclosed by fine wire mesh, reducing the risk of an accident.

Anti-Skid Plate. Anti-skid plate covers top of storage box and upper structure to prevent slipping during maintenance.

Diagnostics and Monitoring.

The 330D FM is equipped with S•O•SSM sampling ports and hydraulic test ports for the hydraulic system, engine oil, and for coolant. A test connection for the Cat Electronic Technician (Cat ET) service tool is located in the cab.

Extended Service Interval. 330D FM service and maintenance intervals have been extended to reduce machine service time and increase machine availability.

Customer Focus

Caterpillar dealer services help you operate longer with lower costs.

Product Support. You will find nearly all parts at our dealer parts counter. Cat dealers utilize a worldwide computer network to find in-stock parts to minimize machine down time. Save money with remanufactured components.

Machine Selection. Make detailed comparisons of the machines you are considering before you buy. What are the job requirements, machine attachments and operating hours? What production is needed? Your Cat dealer can provide recommendations.

Customer Support Agreements.

Cat dealers offer a variety of product support agreements, and work with customers to develop a plan the best meets specific needs. These plans can cover the entire machine, including attachments, to help protect the customer's investment.



Operation. Improving operating techniques can boost your profits. Your Cat dealer has videotapes, literature and other ideas to help you increase productivity, and Caterpillar offers certified operator training classes to help maximize the return on your investment.



Maintenance Services. Repair option programs guarantee the cost of repairs up front. Diagnostic programs such as Scheduled Oil Sampling, Coolant Sampling and Technical Analysis help you avoid unscheduled repairs. Replacement. Repair, rebuild, or replace? Your Cat dealer can help you evaluate the cost involved so you can make the right choice.

Engine

Engine Model	Cat® C9 ACERT™	
Net Flywheel Power	200 kW	268 hp
ISO 9249	200 kW	268 hp
J1349	188 kW	252 hp
EEC 80/1269	200 kW	268 hp
Bore	112 mm	4.4 in
Stroke	149 mm	5.9 in
Displacement	8.8 L	537 in ³

- The 330D FM meets U.S. EPA Tier 3 and EU Stage IIIa emissions requirements.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- No engine derating required below 2300 m (7,500 ft) altitude.

Weights

General Forestry (HW)	41 426 kg	91,344 lb
Log Loader (U/U)	45 801 kg	100,991 lb
Log Loader (O/U)	46 261 kg	102,005 lb

- Operating weight with front linkage, without bucket or grapple.

Service Refill Capacities

Fuel Tank	600 L	158.5 gal
Fuel Tank – Optional Auxiliary Right Front	410 L	108.3 gal
Optional Counterweight with Fuel Tank	600 L	158.5 gal
Maximum Fuel with all Optional Tanks	1610 L	425.4 gal
Cooling System	38 L	10 gal
Engine Oil	34 L	9.5 gal
Swing Drive	19 L	5 gal
Hydraulic System (including tank)	410 L	108.3 gal
Hydraulic Tank	175 L	46.2 gal
Final Drive (each)	8 L	2 gal

Drive

Maximum Drawbar Pull	317 kN	71,264 lb
Maximum Travel Speed	4.8 km/h	3 mph

Hydraulic System

Main Implement System – Maximum Flow (2x)	280 L/min	74 gal/min
Max. pressure – Implements	35 000 kPa	5,075 psi
Max. pressure – Travel	35 000 kPa	5,075 psi
Max. pressure – Swing	27 900 kPa	4,046 psi
Pilot System – Maximum flow	37 L/min	9.8 gal/min
Pilot System – Maximum pressure	4100 kPa	595 psi
Boom Cylinder – Bore	150 mm	5.9 in
Boom Cylinder – Stroke	1440 mm	56.7 in
Stick Cylinder – Bore	170 mm	6.7 in
Stick Cylinder – Stroke	1738 mm	68.4 in

Log Loader Linkage

Boom Cylinder – Bore	170 mm	6.7 in
Boom Cylinder – Stroke	1340 mm	52.8 in
Stick Cylinder – Bore	180 mm	7.1 in
Stick Cylinder – Stroke	1661 mm	65.4 in
Under/Under Heel Cylinder – Bore	150 mm	5.9 in
Under/Under Heel Cylinder – Stroke	1155 mm	45.5 in
Over/Under Heel Cylinder – Bore	160 mm	6.3 in
Over/Under Heel Cylinder – Stroke	1465 mm	57.7 in

Swing Mechanism

Swing Torque – General Forestry	113.9 kN-m	84,024 lb ft
Swing Torque – Log Loaders	148 kN-m	109,560 lb ft
Swing Speed – General Forestry	10 rpm	
Swing Speed – Log Loaders	6.3 rpm	

Excavator Linkage


CB2 Family Bucket Cylinder – Bore	150 mm	5.9 in
CB2 Family Bucket Cylinder – Stroke	1151 mm	45.3 in

Standards

Brakes	SAE J1026 APR90
Cab/FOGS/OPS/TOPS/FOPS	SAE J1356 FEB88 ISO 10262/ SAE J1084/ISO 8084/ OR-OSHA 437-007-0775/ WCB G602, G603, G604, G608

Dimensions

All dimensions are approximate.

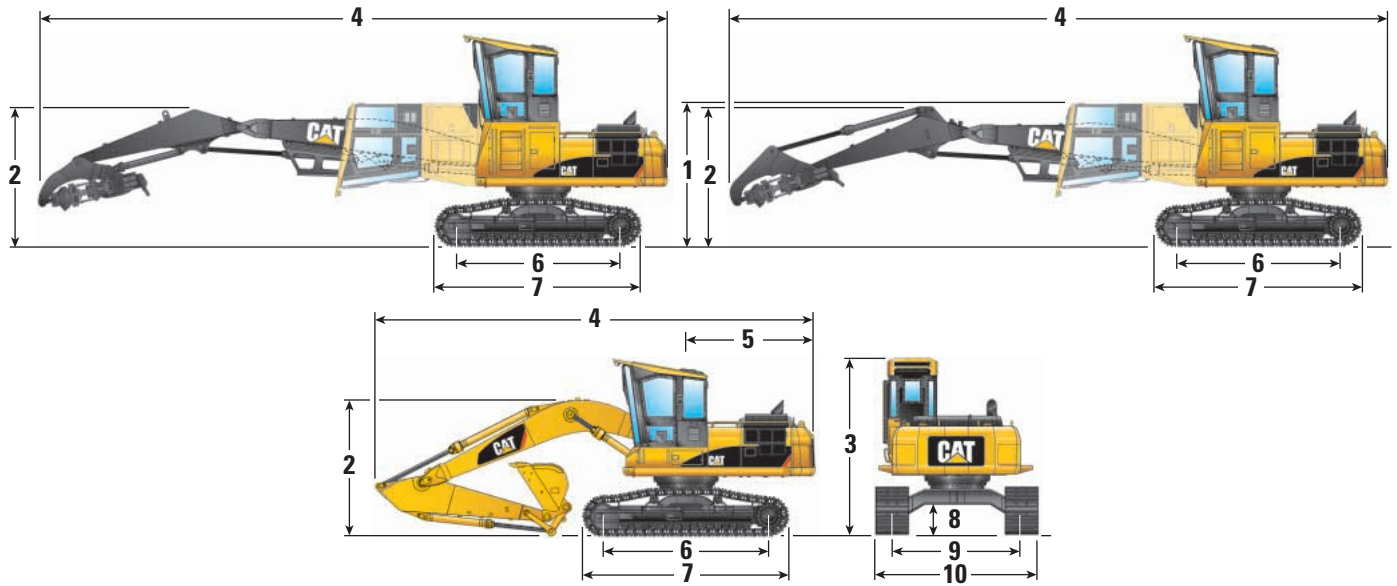

330D FM General Forestry

HD GF

1	Shipping height. (All risers with cab tilted)	3470 mm (11'5")
2	Boom height	3780 mm (12'5")
3	Overall height	4180 mm (13'9")
4	Shipping length	11 150 mm (36'7")
5	Tail swing radius	3490 mm (11'5")
6	Length to centers of rollers	4020 mm (13'2")
7	Track length	5060 mm (16'7")
8	Ground clearance	760 mm (2'6")
9	Track gauge	2920 mm (9'7")
10	Transport width with 700 mm (27.5") shoes (DG)	3650 mm (11'11")

330D FM Log Loaders

Under/Under


Over/Under

1	Shipping height. (All risers with cab tilted)	3470 mm (11'5")	3470 mm (11'5")
2	Boom height	3080 mm (10'1")	3030 mm (10'1")
3	Overall height	4950 mm (16'3")	4950 mm (16'3")
4	Shipping length	16 630 mm (54'7")	17 320 mm (56'10")
5	Tail swing radius	3490 mm (11'5")	3490 mm (11'5")
6	Length to centers of rollers	4020 mm (13'2")	4020 mm (13'2")
7	Track length	5060 mm (16'7")	5060 mm (16'7")
8	Ground clearance	760 mm (2'6")	760 mm (2'6")
9	Track gauge	2920 mm (9'7")	2920 mm (9'7")
10	Transport width with 700 mm (27.5") shoes (DG)	3650 mm (11'11")	3650 mm (11'11")


330D FM Working Ranges

Heel Boom (Under/Under, Over/Under), and Reach ranges


**Heel Boom
(Under/Under)**

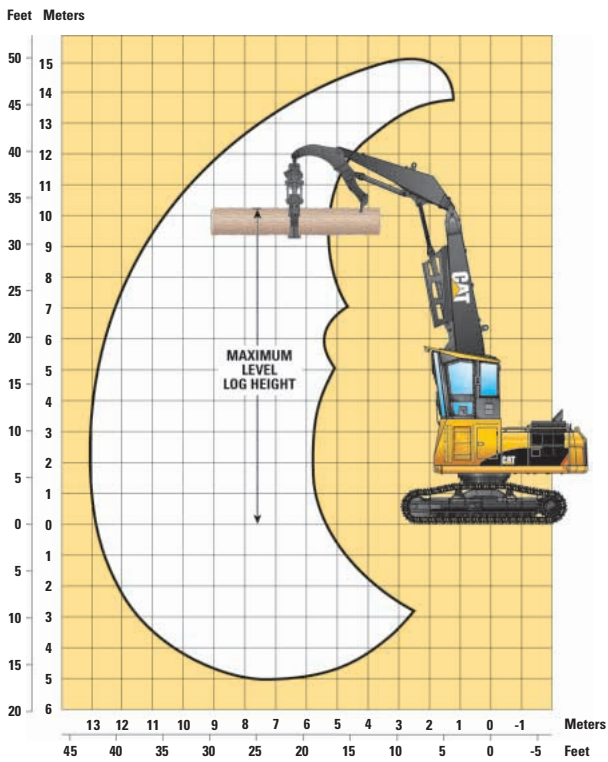

**Heel Boom
(Over/Under)**

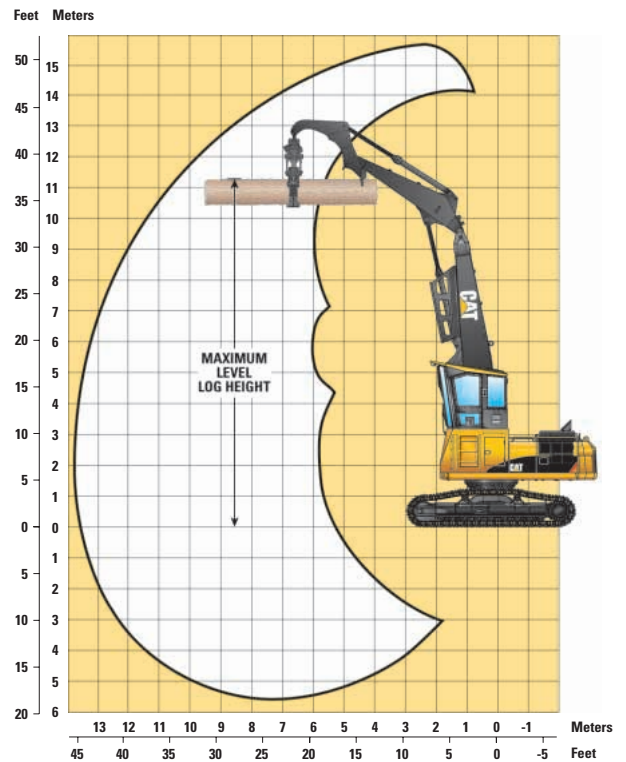

**General Forestry
HD LC U/C, 6.5 m (21'2") Reach Boom
with 3.9 m (12'9") Reach Stick**

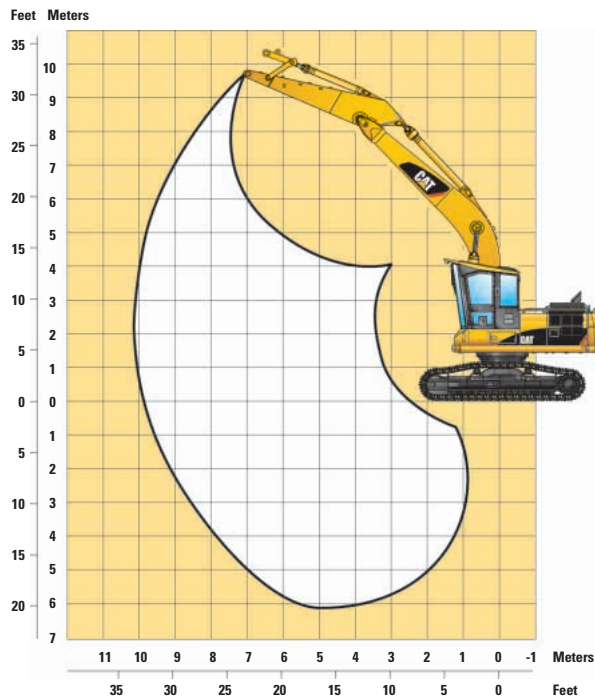

330D FM LL Heel Boom Under/Under Lift Capacities

CONFIGURATION – 13.1 m (43') Boom/Stick/Heel Linkage,
Heavy Counterweight

SHOES – 700 mm (28") Double Grouser

Load Point Height	3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		Load at Maximum Reach						
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft				
10.5 m 35.0 ft	kg lb								*11 700 *25,600	11 400 24,450	*10 450 *22,200	8350 17,850					*6750 15,100	6500 14,650	10.23 33.11		
9.0 m 30.0 ft	kg lb								*11 700 *25,550	11 500 24,650	*10 650 *23,300	8500 18,150	8550 18,250	6450 13,750			*6200 *13,700	5550 12,350	11.28 36.71		
7.5 m 25.0 ft	kg lb								*11 900 *26,000	11 400 24,450	*10 750 *23,400	8450 18,100	8600 18,400	6500 13,900	*6300 5000		*5850 12,900	4950 11,000	12.05 39.35		
6.0 m 20.0 ft	kg lb								*12 450 *27,150	11 150 23,950	10 950 23,550	8300 17,850	8500 18,300	6450 13,800	6800 14,500	5050 10,800	*5650 *12,450	4600 10,150	12.59 41.22		
4.5 m 15.0 ft	kg lb								*11 650 *25,900	*11 650 *25,900	*13 250 *28,700	10 800 23,200	10 750 23,050	8100 17,400	8400 18,000	6300 13,550	6750 14,450	5050 10,750	*5550 *12,200	4350 9,650	12.94 42.41
3.0 m 10.0 ft	kg lb								*17 250 *37,350	14 500 31,250	13 850 29,850	10 350 22,250	10 450 22,500	7850 16,850	8250 17,700	6150 13,250	6650 14,300	4950 10,650	*5550 *12,200	4250 9,400	13.10 42.98
1.5 m 5.0 ft	kg lb								*18 250 *39,500	13 700 29,500	13 400 28,800	9900 21,300	10 200 21,900	7550 16,300	8050 17,350	6000 12,900	6600 14,150	4900 10,450	*5650 *12,400	4250 9,350	13.10 42.97
Ground Line	kg lb								18 250 39,150	13 050 28,150	13 000 27,950	9500 20,500	9950 21,350	7350 15,800	7950 17,050	5850 12,600	6550 14,050	4800 10,350	*4900 *10,750	4350 9,550	12.91 42.36
-1.5 m -5.0 ft	kg lb			*6700 *15,700	*6700 *15,700	*17 000 *36,850	12 700 27,300	12 700 27,300	9250 19,950	9750 21,000	7200 15,450	7850 16,850	5800 12,450	*5800 *11,650	4800 10,350			*3950 *8,750	*3950 *8,750	12.53 41.07	
-3.0 m -10.0 ft	kg lb	*4150 *9,500	*4150 *9,500	*8750 *20,250	*8750 *20,250	*14 600 *31,450	12 500 26,950	*11 600 *24,900	9150 19,650	*9100 *19,400	7100 15,300	*6700 *13,900	5750 12,400					*4400 *9,700	*4400 *9,700	11.57 37.83	
-4.5 m -15.0 ft	kg lb					*10 900 *23,250	*10 900 *23,250	*8700 *18,400	*8700 *18,400	*6500 *13,400	*6500 *13,400							*5550 *12,500	*5550 *12,500	9.56 30.83	

* Limited by hydraulic capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Weight of all lifting accessories must be deducted from the above lifting capacities.

330D FM LL Heel Boom Over/Under Lift Capacities

CONFIGURATION – 13.7 m (45') Boom/Stick/Heel Linkage,
Heavy Counterweight

SHOES – 700 mm (28") Double Grouser

Load Point Height	3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		Load at Maximum Reach						
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft				
10.5 m 35.0 ft	kg lb								*10 050 *23,450	8550 *23,450	*7950 *21,650	6400 18,250	*15,550 13,450				*5900 *13,150	5750 12,850	10.99 35.62		
9.0 m 30.0 ft	kg lb								*9,650 *9,650	*4350 *9,500	*4350 *9,500	*3900 *8,250	*3900 *8,250				*5450 *12,050	4950 11,000	11.97 38.99		
7.5 m 25.0 ft	kg lb								*23,050 *23,050	*10 100 *22,050	8600 18,400	8650 18,450	6500 13,900				*5150 *11,350	4450 9,850	12.70 41.49		
6.0 m 20.0 ft	kg lb								*10 250 *22,800	*10 250 *22,800	*10 200 *22,200	8500 18,300	8600 18,450	6500 13,900	6800 14,450	5050 10,750	*5000 *10,950	4100 9,100	13.21 43.26		
4.5 m 15.0 ft	kg lb								*10 500 *23,300	*10 500 *23,300	*10 500 *22,800	8350 17,900	8500 18,250	6400 13,750	6750 14,450	5050 10,750	*4900 *10,750	3900 8,650	13.54 44.40		
3.0 m 10.0 ft	kg lb								*8850 *19,850	*8850 *19,850	*11 600 *25,650	10 850 23,350	10 750 23,100	8100 17,350	8350 17,900	6250 13,400	6700 14,300	4950 10,600	*4900 *10,750	3800 8,400	13.70 44.95
1.5 m 5.0 ft	kg lb								*12 050 *26,650	*12 050 *26,650	*13 350 *28,900	10 350 22,250	10 400 22,350	7750 16,700	8150 17,500	6050 13,000	6550 14,100	4850 10,350	*4950 *10,850	3800 8,350	13.69 44.93
Ground Line	kg lb								*17 550 *37,950	13 650 29,400	13 300 28,600	9800 21,050	10 050 21,600	7450 16,000	7950 17,050	5850 12,550	6450 13,850	4750 10,150	*4450 *9,800	3900 8,500	13.52 44.35
-1.5 m -5.0 ft	kg lb			*7000 *16,450	*7000 *16,450	*17 100 *37,050	12 300 26,450	12 400 26,700	8950 19,250	9500 20,450	6900 14,850	7600 16,350	5550 11,900	5550 11,900	6300 13,500			*3550 *7,800	*3550 *7,800	13.17 43.18	
-3.0 m -10.0 ft	kg lb	*3800 *8,650	*3800 *8,650	*8450 *19,600	*8450 *19,600	*15 150 *32,700	12 050 25,900	*11 950 25,750	8750 18,850	9350 21,150	6800 14,600	*7300 *15,350	5500 11,800	*4700 *9,050	4600 *9,050			*8,300 *8,300	*8,300 *8,300	12.34 10.38	
-4.5 m -15.0 ft	kg lb			*10 750 *24,750	*10 750 *24,750	*12 000 *25,650	*12 000 *25,650	*9550 *20,300	8700 18,750	*7350 *15,400	6750 14,600	*5000 *10,000	*5000 *10,000					*4500 *9,950	*4500 *9,950	10.78 35.01	

* Limited by hydraulic capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Weight of all lifting accessories must be deducted from the above lifting capacities.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330D FM LL Butt-N-Top Lift Capacities

CONFIGURATION – 12.2 m (40') Boom/Stick Linkage

SHOES – 700 mm (28") Double Grouser

Load Point Height		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft		Load at Maximum Reach		
		Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft
10.5 m 35.0 ft	kg lb			*14 650 *32,250	*14 650 *32,250	*13 100 *28,800	11 750 25,100	*9050	8500					*8950 *20,000	8500 19,200	9.01 29.04
9.0 m 30.0 ft	kg lb			*31,650	*31,650	*28,150	25,400	11 850 24,700	8800 18,850					*8050 *17,900	7050 15,700	10.19 33.10
7.5 m 25.0 ft	kg lb			*14 100 *31,200	*14 100 *31,200	*13 100 *28,450	11 750 25,250	11 500 24,750	8800 18,900	8950 19,150	6850 14,600			*7550 *16,650	6200 13,750	11.03 36.01
6.0 m 20.0 ft	kg lb			*14 650 *32,400	*14 650 *32,400	*13 550 *29,400	11 500 24,750	11 400 24,500	8700 18,700	8950 19,200	6800 14,600			*7250 *15,950	5700 12,600	11.63 38.04
4.5 m 15.0 ft	kg lb			*17 150 *37,150	15 600 33,600	*14 150 *30,650	11 150 24,000	11 200 24,050	8500 18,250	8850 19,000	6700 14,450	*7150	5400	*7100 *15,650	5400 11,900	12.00 39.33
3.0 m 10.0 ft	kg lb			*18 300 *39,550	14 850 31,950	14 350 30,850	10 750 23,150	10 950 23,550	8250 17,800	8700 18,750	6600 14,150	7150	5400	7000 15,350	5250 11,600	12.18 39.95
1.5 m 5.0 ft	kg lb			*18 650 *40,450	14 150 30,450	13 900 29,950	10 350 22,300	10 700 23,050	8050 17,300	8600 18,450	6450 13,900	7100	5350	*6450 *14,250	5250 11,550	12.17 39.93
Ground Line	kg lb			*17 950 *38,850	13 650 29,400	13 600 29,300	10 050 22,650	10 500 22,650	7850 16,900	8500 18,250	6400 13,750			*5450 *12,000	5400 11,800	11.97 39.28
-1.5 m -5.0 ft	kg lb	*7200 *16,800	*7200 *16,800	*15 900 *34,500	13 400 28,900	*12 700 *27,400	9900 21,300	10 050 *21,550	7750 16,700	*7500 *15,700	6350 13,650			*4750 *10,500	*4750 *10,500	11.49 37.66
-3.0 m -10.0 ft	kg lb	*10 200 *23,550	*10 200 *23,550	*12 700 *27,350	*12 700 *27,350	*10 250 *21,950	9850 21,200	*7850 *16,500	7750 *16,500					*5450 *12,050	*5450 *12,050	10.23 33.38

* Limited by hydraulic capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Weight of all lifting accessories must be deducted from the above lifting capacities.

330D FM GF Reach Boom Lift Capacities

CONFIGURATION – 6.5 m (21'4") Boom, 3.95 m (13'0") Stick, Heavy Counterweight

SHOES – 700 mm (28") Double Grouser

Load Point Height		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		Load at Maximum Reach		
		Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft
9.0 m 30.0 ft	kg lb									*6500	*6500			*5950 *13,200	*5950 *13,200	7.62 24.55
7.5 m 25.0 ft	kg lb									*7450 *16,400	*7450 *16,400			*5600 *12,400	*5600 *12,400	8.72 28.37
6.0 m 20.0 ft	kg lb									*7850 *17,100	*7850 *17,100	*7650 *15,450	*7650 *15,450	*5500 *12,100	*5500 *12,100	9.46 30.91
4.5 m 15.0 ft	kg lb							*9650 *20,900	*9650 *20,900	*8600 *18,650	*8600 *18,650	*8000 *17,450	*8000 *17,450	*5550 *12,150	*5550 *12,150	9.92 32.49
3.0 m 10.0 ft	kg lb					*15 050 *32,350	*15 050 *32,350	*11 350 *24,550	*11 350 *24,550	*9500 *20,650	*9500 *20,650	*8450 *10,400	8150 17,500	*5700 *12,550	*5700 *12,550	10.14 33.24
1.5 m 5.0 ft	kg lb					*17 750 *38,300	*17 750 *38,300	*12 900 *27,850	*12 900 *27,850	*10 400 *22,550	10 200 21,950	*8950 *19,400	7950 17,150	*6050 *13,300	*6050 *13,300	10.12 33.22
Ground Line	kg lb			*8700 *19,650	*8700 *19,650	*19 000 *41,200	*19 000 *41,200	*13 900 *30,050	13 400 28,900	*11 050 *23,900	9950 21,450	*9250 *20,050	7850 16,900	*6600 *14,550	*6600 *14,550	9.88 32.43
-1.5 m -5.0 ft	kg lb	*9200 *20,500	*9200 *20,500	*13 300 *29,900	*13 300 *29,900	*19 050 *41,350	*19 050 *41,350	*14 200 *30,750	13 200 28,500	*11 250 *24,350	9800 21,150	*9200 *19,850	7750 16,750	*7500 *16,550	7350 16,250	9.40 30.80
-3.0 m -10.0 ft	kg lb	*14 050 *31,400	*14 050 *31,400	*19 150 43,250	*19 150 43,250	*18 100 *39,200	*18 100 *39,200	*13 700 *29,650	13 200 28,450	*10 800 *23,300	9800 21,150			*8950 *19,650	8250 18,250	8.62 28.19
-4.5 m -15.0 ft	kg lb			*21 800 *47,000	*21 800 *47,000	*15 900 *34,300	*15 900 *34,300	*12 150 *26,050	*12 150 *26,050					*9050 *19,950	*9050 *19,950	7.47 24.29
-6.0 m -20.0 ft	kg lb					*11 600 *24,300	*11 600 *24,300							*8700 *20,400	*8700 *20,400	5.71 17.46

* Limited by hydraulic capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Weight of all lifting accessories must be deducted from the above lifting capacities.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330D FM GF Mass Boom Lift Capacities

CONFIGURATION – 6.18 m (20'3") Boom, 3.5 m (11'6") Stick,
Standard Counterweight

SHOES – 700 mm (28") Double Grouser

Load Point Height	1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		Load at Maximum Reach				
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	m ft		
9.0 m 30.0 ft	kg lb														*6300 *14,050	*6300 *14,050	6.67 21.41
7.5 m 25.0 ft	kg lb								*8100 *15,900	*8100 *15,900					*5850 *12,900	*5850 *12,900	7.91 25.70
6.0 m 20.0 ft	kg lb								*8650 *18,950	*8650 *18,950					*5650 *12,450	*5650 *12,450	8.73 28.49
4.5 m 15.0 ft	kg lb							*10 450 *22,600	*10 450 *22,600	*9300 *20,250	*9300 *20,250	*7500 *13,750	7200 *13,750		*5700 *12,500	*5700 *12,500	9.22 30.19
3.0 m 10.0 ft	kg lb					*15 950 *34,300	*15 950 *34,300	*12 050 *26,100	*12 050 *26,100	*10 150 *22,000	9200 19,800	*9050 *18,900	7100 15,250		*5900 *12,900	*5900 *12,900	9.45 31.00
1.5 m 5.0 ft	kg lb					*18 500 *39,950	*18 500 *39,950	*13 500 *29,200	12 100 26,150	*10 900 *23,700	8950 19,250	9350 20,100	6950 15,000		*6250 *13,750	*6250 *13,750	9.44 30.98
Ground Line	kg lb			*10 650 *24,100	*10 650 *24,100	*19 500 *42,300	17 950 38,400	*14 350 *31,050	11 800 25,400	*11 400 *24,750	8750 18,800	9250 *16,350	6850 14,800		*6900 *15,200	6700 14,750	9.18 30.12
-1.5 m -5.0 ft	kg lb	*11 300 *25,200	*11 300 *25,200	*16 400 *37,000	*16 400 *37,000	*19 250 *41,750	17 700 38,100	*14 400 *31,200	11 650 25,100	*11 350 *24,600	8650 18,650				*8000 *17,650	7200 15,900	8.66 28.36
-3.0 m -10.0 ft	kg lb	*17 250 *38,550	*17 250 *38,550	*24 000 *53,450	*24 000 *53,450	*17 800 *38,450	*17 800 *38,450	*13 500 *29,150	11 650 25,150	*10 350 *22,050	8700 18,800				*9650 *21,300	8300 18,350	7.81 25.51
-4.5 m -15.0 ft	kg lb			*19 750 *42,400	*19 750 *42,400	*14 700 *31,450	*14 700 *31,450	*10 900 *23,000	*10 900 *23,000						*9550 *20,950	*9550 *20,950	6.51 21.10

* Limited by hydraulic capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Weight of all lifting accessories must be deducted from the above lifting capacities.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

Forestry Grapples

Specification	GLL 52	GLL 55	GLL 60
Part #	271-1533	271-1534	271-1535
For use with	320C FM, 324D FM	324D FM, 325D FM	325D FM, 330D FM
Rotation	Continuous	Continuous	Continuous
Rotation torque	1153 N·m (850 ft-lb)	1153 N·m (850 ft-lb)	1153 N·m (850 ft-lb)
Max. Opening	1321 mm (52")	1397 mm (55")	1524 mm (60")
Min. Opening	126 mm (5")	126 mm (5")	126 mm (5")
Weight	1255 kg (2,767 lb)	1291 kg (2,840 lb)	1344 kg (2,965 lb)
Width	673 mm (26.5")	673 mm (26.5")	673 mm (26.5")
Height, open	2134 mm (84")	2184 mm (86")	2261 mm (89")

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for details.

Electrical

- 80 Ampere alternator
- 4 Front working lights, cab top mounted
- 2 Front working lights, riser mounted
- 1 Left side working light, cab mounted
- 1 Rear working light, cab mounted
- Horn

Operator Environment

- Purpose built forestry cab with 8 lights and all scratch resistant polycarbonate windows
- Seat, four-way adjustable suspension seat with adjustable armrest, retractable seatbelt, headrest and lumbar support
- Integrated seat, console and joystick type controls
- Language display monitor with gauges
- Warning information
 - Filter/fluid change information
 - working hour information
 - machine condition
 - error code and tool mode setting information
 - start up level check for hydraulic oil, engine oil and engine coolant
- Full time clock on monitor (2 weeks)
- Seat mounted joystick with extra functions for grapple
- Fixed polycarbonate skylight with retractable sun shade
- Interior lighting
- Lower and upper windshield wipers and washer
- Positive filtered ventilation, pressurized cab with bi-level air conditioner, heater and defroster with manual control
- Forced air fan
- 2 post mounted fresh air vents
- Behind seat storage tray with tie down points
- 2 CB radio mounts
- 1 Fire extinguisher mount
- 1 Attachment computer control mount
- Secondary roof exit openable from inside and outside
- 2 Coat hooks
- Ashtray with lighter
- Literature holder
- Cup holder
- Neutral lever for all controls
- Travel control pedals with removable hand levers
- Washable floor mat
- Radio/CD player (12V)
- 1 Converter/2 sockets – 12V-10A power supply

Power Train

- Cat C9 with ACERT™ Technology U.S. EPA Tier 3 emissions compliant with 24-volt electric starting and air intake heater
- Automatic engine speed control with one touch low idle
- Water separator in fuel line
- Two speed auto-shift travel
- Easy clean swing out radiator
- Muffler

Undercarriage

- Hydraulic track adjusters
- Track type undercarriage with grease lubricated seals
- Idler and full-length track shoe support

Other Standard Equipment

- Heavy-duty upper frame with catwalks, bottom guards, heavy duty side doors
- Core hydraulic lines and controls with standard main valves on upper structures
- Door locks, cap locks and Caterpillar one key security system
- Automatic swing parking brake
- Travel alarm
- Counterweight with lifting eye
- Right front corner guard

330D FM General Forestry Arrangement also includes:

- Forestry cab, hydraulic tilt 457 mm (18 inch) riser
- High-wide undercarriage
- High drawbar
- Heavy-Duty recoil springs
- Heavy-Duty track roller frame
- Heavy-Duty travel motor covers
- Straight travel third pedal
- Heavy-Duty swivel grapple/rotator hydraulic arrangement
- Heavy-Duty swivel guard
- Forestry Heavy-Duty upper frame with catwalk
- Heavy-Duty bottom guard
- Heavy-Duty side doors
- Right front corner guard
- Travel alarm and full length shoe support

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for details.

330D FM Log Loader Arrangement also includes:

- Forestry cab
- Hydraulic tilt 1219 mm (48 inch) riser
- High-wide undercarriage
- High drawbar
- Heavy-Duty recoil springs
- Heavy-Duty track roller frame
- Heavy-Duty travel motor covers
- Straight travel third pedal
- Heavy-Duty swivel grapple/rotator hydraulic arrangement
- Heavy-Duty swivel guard
- Forestry Heavy-Duty upper frame with catwalk
- Heavy-Duty bottom guard
- Heavy-Duty side doors
- Right front corner guard
- Travel alarm and full length shoe support

330D FM Log Loader Arrangement for AEM Cab also includes:

- AEM cab platform
- High-wide undercarriage
- High drawbar
- Heavy-Duty recoil springs
- Heavy-Duty track roller frame
- Heavy-Duty travel motor covers
- Standard excavator hydraulic arrangement
- Heavy-Duty swivel grapple/rotator hydraulic arrangement
- Heavy-Duty swivel guard
- Forestry Heavy-Duty upper frame with catwalk
- Heavy-Duty bottom guard
- Heavy-Duty side doors
- Right front corner guard
- Travel alarm
- Full length shoe support
- Counterweight with removable segments fuel tank

Optional Equipment

Optional equipment may vary. Consult your Caterpillar dealer for details.

Front Linkage: For General Forestry

- Reach Boom 6.5 m (21 ft 4 in)
- Reach DB Stick 3.2 m (10 ft 6 in)
- Reach DB Stick 3.9 m (12 ft 10 in)
- Mass Boom 6.2 m (20 ft 3 in)
- Mass DB Stick 3.5 m (11 ft 7 in)
- Bucket Linkage DB Family
- Boom lowering Control Device

Front Linkage: For Log Loader

- Over/Under Boom/Stick/Heel linkage 12.8 m (42 ft 0 in)
- Under/Under Boom/Stick/Heel linkage 12.2 m (40 ft 0 in)
- Butt-n-Top Boom/Stick linkage 11.3 m (37 ft 0 in)
- Stick Cylinder Guard

Hydraulic Arrangements: For General Forestry

- Rotating Grapple
- Butt-n-Top Grapple (also available on Log Loader)
- Thumb

Auxiliary Hydraulic Lines: For General Forestry

- Auxiliary lines HP & MP, Reach and Mass Boom
- Auxiliary lines HP & MP, Reach and Mass Stick

Engine/Power Train

- Auto Reverse Fan
- Prefilter, air
- Cold Weather Starting Aid
- Extended Life Cooling with 50% concentration of protection -34°C (-30°F)

Undercarriage (Track Shoes)

- 700 mm (28 in) Double Grouser Shoes with Trap Holes
- 850 mm (34 in) Heavy-Duty Triple Grouser Shoes with Trap Holes

Electrical

- Product Link (PL 321 SR)

General Optional Equipment

- Auxiliary Pump Driver (for additional pump)
- Right Front Corner Fuel Tank (additional 409 L – 108 gal)
- Counterweight with Fuel Tank Adds (602 L – 159 gal)
- Heavy Counterweight (additional 2960 kg – 4,620 lb).
- For General Forestry (Standard on Log Loader).
- GLL and GLLS Family Grapples. For General Log Loader.

330D FM Forest Machine

For more complete information on Cat products, dealer services,
and industry solutions, visit us on the web at www.cat.com

© 2009 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Caterpillar dealer for available options.

AEHQ5917-01 (1-09)

Replaces AEHQ5917

CAT, CATERPILLAR, SAFETY.CAT.COM, ACERT, their respective logos, "Caterpillar Yellow"
and the POWER EDGE trade dress, as well as corporate and product identity used herein,
are trademarks of Caterpillar and may not be used without permission.

CATERPILLAR[®]