


D7E WH Waste Handler

Dimensions

All dimensions are approximate

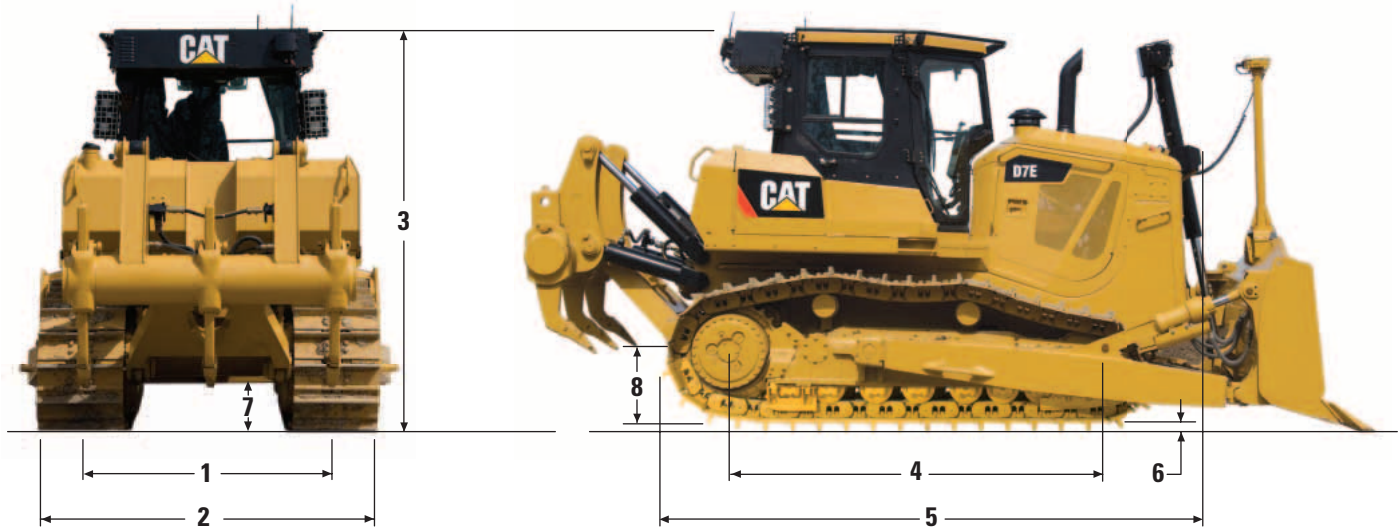

	STD		LGP	
1 Track Gauge	1981 mm	78 in	2286 mm	90 in
2 Width of Tractor over Trunnions	2880 mm	113 in	3423 mm	135 in
Width of Tractor without Trunnions (std. shoes)	2591 mm	102 in	3200 mm	126 in
3 Machine Height from Tip of Grouser				
Top of Stack	3365 mm	132 in	3365 mm	132 in
Top of Standard Cab	3392 mm	134 in	3392 mm	134 in
From Ground Face of Shoe	3322 mm	131 in	3322 mm	131 in
4 Length of Track on Ground	3016 mm	119 in	3450 mm	136 in
5 Length of Basic Tractor	4608 mm	181 in	4608 mm	181 in
With the following attachments add to basic tractor length:				
Ripper (with tip at ground line)	1391 mm	55 in	N/A	
Ripper (with tip fully raised)	1222 mm	48 in	N/A	
Winch	1032 mm	41 in	1032 mm	41 in
Drawbar	270 mm	10.6 in	270 mm	10.6 in
S Blade	977 mm	38 in	N/A	
SU Blade	1187 mm	47 in	N/A	
U Blade	1425 mm	56 in	N/A	
A Blade	1230 mm	48 in	1230 mm	48 in
6 Height of Grouser	70 mm	2.75 in	70 mm	2.75 in
7 Ground Clearance	472 mm	18.6 in	472 mm	18.6 in
Ground Contact Area (std. shoes)	3.68 m ²	5,698 in ²	6.31 m ²	9,792 in ²
Number of Shoes per Side	40		44	
Standard Shoe Width and Type	610 mm	24 in	915 mm	36 in
	MS		MS	
Ground Pressure	0.699 kg/cm ²	9.9 psi	0.446 kg/cm ²	6.3 psi
Pitch	215.9 mm	8.5 in	215.9 mm	8.5 in
Track Rollers/Side	7		8	
Number of Carrier Rollers	2		2	
8 Drawbar Height (grouser tip to center of clevis)	719 mm	28 in	719 mm	28 in

D7E WH Waste Handler

Bulldozer Specifications

Blade		7S	7SU	7U	7S LGP
Blade Capacity (SAE J1265)*	m³	10.9	14	16.8	12.3
	yd³	14.2	18.4	22	16.1
Width (over end bits)	mm	3904	3713	3988	4545
	ft	12.81	12.18	13.08	14.91
Height	mm	1363	1524	1553	1343
	ft	4.5	5	5.1	4.4
Digging Depth	mm	586	586	586	644
	in	23.1	23.1	23.1	25.4
Ground Clearance	mm	1108	1108	1108	1264
	in	43.6	43.6	43.6	49.8
Maximum Tilt	mm	1045	987	1085	785
	in	41.1	38.9	42.7	30.9
Weight**	kg	4200	4380	4540	3860
	lb	9,240	9,636	9,988	8,492

* Capacities calculated with a trash rack installed.

** Weight includes cylinder mounting, lift cylinder and lines, blade, push arms, trunnions, and cylinder lines (Tilt).

Undercarriage

Type	Heavy Duty/SystemOne Undercarriage			
Configuration	STD		LGP	
Number of Rollers (each side)	7		8	
Number of Shoes (each side)	40		44	
Pitch	216 mm	8.5 in	216 mm	8.5 in
Shoe Width	610 mm	24 in	915 mm	36 in
Grouser Height (MS)	70 mm	2.75 in	70 mm	2.75 in
Length of Track on Ground (Heavy Duty)	3016 mm	119 in	3450 mm	136 in
Length of Track on Ground (SystemOne)	3021 mm	119 in	3455 mm	136 in
Track Gauge	1981 mm	78 in	2286 mm	90 in
Ground Contact Area (Heavy Duty)	3.68 m²	5,698 in²	6.31 m²	9,792 in²
Ground Pressure (Heavy Duty)	69.9 kPa	9.9 psi	44.6 kPa	6.3 psi
Ground Clearance	472 mm	18.6 in	472 mm	18.6 in