

## General Specifications

### Centaur® 40 Gas Turbine

- Industrial, Single Shaft
- Axial Compressor
  - 11 Stage
  - Variable Inlet Guide Vanes
  - Pressure Ratio: 10.2:1
  - Inlet Airflow: 18.7 kg/sec (41.3 lb/sec)
- Combustion Chamber
  - Annular Type
  - Conventional or Lean-Premixed, Dry, Low Emission (SoLoNOx™)
  - Fuel Injectors: 10 for Conventional; 12 for SoLoNOx
  - Torch Ignitor System
- Turbine
  - 3 Stage, Reaction
  - Max. Speed: 14,950 rpm
- Bearings
  - Journal: Tilting Pad
  - Thrust: Fixed Tapered Land
- Compressor Coating
  - Stators and Drums: Inorganic Aluminum
- Turbine Coatings (Optional)
  - Stage 1 and 2 Nozzles: Diffusion Aluminum
  - Stage 1 Blades: Platinum Aluminide
- Velocity Vibration Transducer and RTDs

### Main Reduction Drive

- Epicyclic Type
- 1500 rpm (50 Hz) or 1800 rpm (60 Hz)
- Acceleration Vibration Transducer

### Generator

- Type: Salient Pole, 3 Phase, 6 Wire, Wye Connected, Synchronous, with Brushless Exciter
- Construction Options
  - Open Drip Proof
  - Weather Protected II (WP II)
  - Totally Enclosed Water/Air Cooled
- Sleeve Bearings
- Voltage Regulation
  - Solid-State Regulation with Permanent Magnet Generator
- NEMA Class F Insulation with B Temperature Rise
- Voltages: 3300 to 13,800 Volt
- Frequency: 50 or 60 Hz

### Key Package Features

- Base Frame with Drip Pans
- 316L Stainless Steel Piping ≤4" dia
- Compression-Type Tube Fittings
- Digital Display Panel
- Electrical System Options
  - NEC Class I, Group D, Div 2
  - CENELEC Zone 2
- Turbotronic™ Microprocessor Control System
  - Freestanding Control Console (with offskid controls)
  - Video Display Unit
  - Temperature and Vibration Monitoring
  - Historical Displays
- Control System Options
  - Auxiliary Control Interface or Auxiliary Control Console (with onskid controls)
  - Remote Control and Display
    - 120-Vdc Control Battery/Charger
    - Supervisory Communications Interface
    - Turbine Performance Map
    - Printer/Logger
    - Field Programming
- Start System: Direct Drive AC
- Fuel Systems
  - Natural Gas
  - Dual (Gas/Liquid)
  - Alternate Fuels
- Integrated Lube Oil System
  - Turbine-Driven Accessories
  - Oil Tank Vent Separator
  - Oil Tank Vent Flame Trap
- Lube Oil System Options
  - Oil Cooler
  - Oil Heater
- Axial Compressor Cleaning Systems
  - On-Crank
  - On-Crank/On-Line
  - Certified Cleaning Tank
- Air Inlet and Exhaust System Options
- Enclosure and Associated Options
- Factory Testing of Turbine and Package
- Documentation
  - Drawings
  - Quality Control Data Book
  - Inspection and Test Plan
  - Test Reports
  - Operation and Maintenance Instruction Manual

### Performance

Output Power	3515 kW <sub>e</sub>
Heat Rate	12 910 kJ/kW <sub>e</sub> -hr (12,240 Btu/kW <sub>e</sub> -hr)
Exhaust Flow	68 365 kg/hr (150,715 lb/hr)
Exhaust Temp.	445°C (830°F)

Nominal Rating – per ISO  
At 15°C (59°F), at sea level

No inlet/exhaust losses


Relative humidity 60%

Natural gas fuel with  
LHV = 35 MJ/nm<sup>3</sup> (940 Btu/scf)

No accessory losses

Engine efficiency: 27.9% (measured at  
generator terminals)


### Available Power

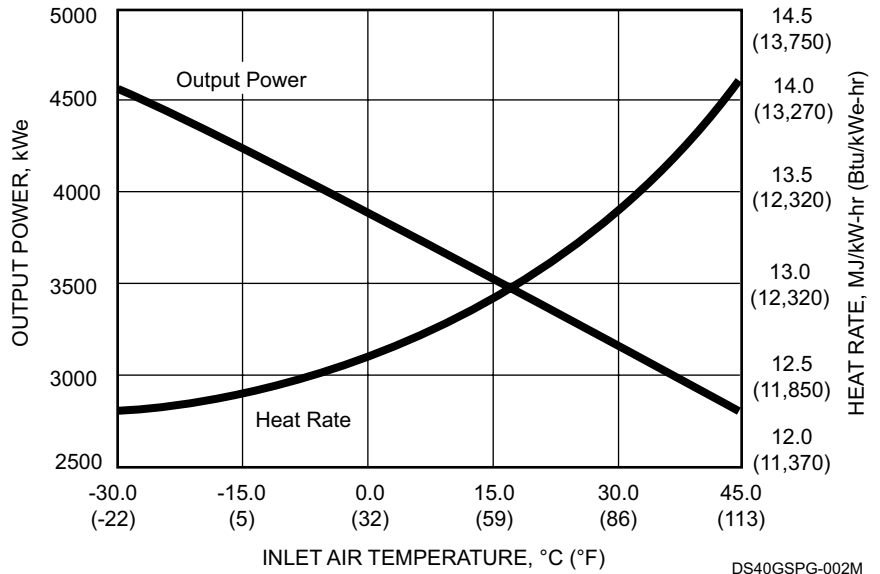

### Package Dimensions\*

- Length: 9.8 m (32' 3")
- Width: 2.6 m (8' 6")
- Height: 3.2 m (10' 5")
- Typical Weight: 30 460 kg (67,150 lb)

\*Dry weight, enclosed height

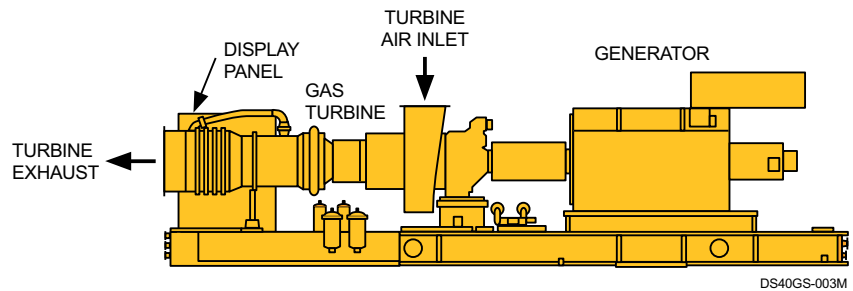

### FOR MORE INFORMATION

Telephone: (+1) 619-544-5352  
Email: [infocorp@solturbines.com](mailto:infocorp@solturbines.com)  
Internet: [www.solturbines.com](http://www.solturbines.com)