

# DIESEL GENERATOR SET



## DE175E3

EU stage IIIA emissions compliant.  
Suitable for Mobile Applications in the European Community.

Image shown may not reflect actual package

Output Ratings		
Generator Set Model - 3 Phase	Prime*	Standby*
400/230V, 50 Hz	160.0 kVA 128.0 kW	175.0 kVA 140.0 kW
	-	-
	-	-

\* Refer to ratings definitions on page 4.  
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Cat® C7.1	
Generator Model:	R2453L4	
Control Panel:	EMCP 4.1	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	-
Fuel Tank Capacity: litres (US gal)	327 (86.4)	
Fuel Consumption, Prime: l/hr (US gal/hr)	36.9 (9.7)	-
Fuel Consumption, Standby : l/hr (US gal/hr)	39.7 (10.5)	-

# DIESEL GENERATOR SET



## Engine Technical Data

Physical Data	
<b>Manufacturer:</b>	Caterpillar
<b>Model:</b>	C7.1
<b>No. of Cylinders/Alignment:</b>	6 / In Line
<b>Cycle:</b>	4 Stroke
<b>Induction:</b>	Turbocharged Air To Air Charge Cooled
<b>Cooling Method:</b>	Water
<b>Governing Type:</b>	Electronic
<b>Governing Class:</b>	ISO 8528 G2
<b>Compression Ratio:</b>	16.8:1
<b>Displacement:</b> l (cu.in)	7.0 (427.8)
<b>Bore/Stroke:</b> mm (in)	105.0 (4.1)/135.0 (5.3)
<b>Moment of Inertia:</b> kg m <sup>2</sup> (lb. in <sup>2</sup> )	1.53 (5228)
<b>Engine Electrical System:</b>	
-Voltage/Ground:	12/Negative
-Battery Charger Amps:	65
<b>Weight:</b> kg (lb) - Dry:	788 (1737)
- Wet:	822 (1812)

Air System	50 Hz	60 Hz
<b>Air Filter Type:</b>	Replaceable Element	
<b>Combustion Air Flow:</b>		
m <sup>3</sup> /min (cfm)	-Standby: 12.4 (438)	-
	-Prime: 11.9 (420)	-
<b>Max. Combustion Air Intake</b>		
<b>Restriction:</b> kPa (in H <sub>2</sub> O)	8.0 (32.1)	-
<b>Radiator Cooling Air Flow:</b>		
m <sup>3</sup> /min (cfm)	276.0 (9747)	-
<b>External Restriction to</b>		
<b>Cooling Air Flow:</b> Pa (in H <sub>2</sub> O)	125 (0.5)	-

Cooling System	50 Hz	60 Hz
<b>Cooling System Capacity:</b>		
l (US gal)	21.0 (5.5)	-
<b>Water Pump Type:</b>	Centrifugal	
<b>Heat Rejected to Water &amp; Lube Oil:</b> kW (Btu/min)		
-Standby:	72.5 (4123)	-
-Prime:	64.0 (3640)	-
<b>Heat Radiation to Room:</b> Heat radiated from engine and alternator		
kW (Btu/min)	-Standby: 37.3 (2121)	-
	-Prime: 34.8 (1979)	-
<b>Radiator Fan Load:</b> kW (hp)	4.5 (6.0)	-
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Cat dealer for power ratings at specific site conditions.		

Lubrication System	
<b>Oil Filter Type:</b>	Spin-On, Full Flow
<b>Total Oil Capacity I (US gal):</b>	17.5 (4.6)
<b>Oil Pan I (US gal):</b>	15.5 (4.1)
<b>Oil Type:</b>	API CH4 / CI4 15W-40
<b>Cooling Method:</b>	Water

Performance	50 Hz	60 Hz
<b>Engine Speed:</b> RPM	1500	-
<b>Gross Engine Power:</b> kW (hp)		
-Standby:	162.8 (218.0)	-
-Prime:	148.1 (199.0)	-
<b>BMEP:</b> kPa (psi)		
-Standby:	1857.0 (269.3)	-
-Prime:	1689.0 (245.0)	-
<b>Regenerative Power:</b> kW	12.5	-

Fuel System				
<b>Fuel Filter Type:</b>	Replaceable Element			
<b>Recommended Fuel:</b>	Class A2 Diesel or BSEN590			
<b>Fuel Consumption:</b> l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
<b>Prime</b>				
50 Hz	39.7 (10.5)	36.9 (9.7)	29.2 (7.7)	20.7 (5.5)
60 Hz	-	-	-	-
<b>Standby</b>				
50 Hz		39.7 (10.5)	31.4 (8.3)	22.4 (5.9)
60 Hz		-	-	-
(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)				

Exhaust System	50 Hz	60 Hz
<b>Silencer Type:</b>	Industrial	
<b>Silencer Model &amp; Quantity:</b>	EXSY1 (1)	
<b>Pressure Drop Across</b>		
<b>Silencer System:</b> kPa (in Hg)	0.17 (0.050)	-
<b>Silencer Noise Reduction</b>		
<b>Level:</b> dB	10	-
<b>Max. Allowable Back</b>		
<b>Pressure:</b> kPa (in. Hg)	15.0 (4.4)	-
<b>Exhaust Gas Flow:</b>		
m <sup>3</sup> /min (cfm)	-Standby: 26.6 (939)	-
	-Prime: 26.4 (932)	-
<b>Exhaust Gas Temperature:</b> °C (°F)		
-Standby:	491 (916)	-
-Prime:	491 (916)	-



# DIESEL GENERATOR SET



## Technical Data



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	160.0	128.0	175.0	140.0
400/230V	160.0	128.0	175.0	140.0
380/220V	160.0	128.0	175.0	140.0

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW

## Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	1590 (3505)
Wet (+ lube oil & coolant)	1611 (3552)
Fuel, lube oil & coolant	1889 (4165)

Dimensions: mm (in)	
Length	2450 (96.5)
Width	1010 (39.8)
Height	1554 (61.2)

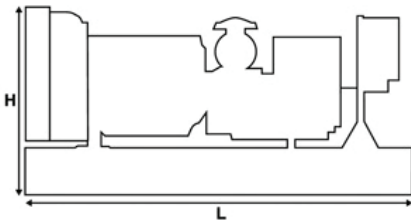

**Note:** General configuration not to be used for installation. See general dimension drawings for detail.

## Definitions

### Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

### Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

### Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

## General Data

### Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

### Quality Standards

The equipment meets the following standards: **IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.**

Price List: C7.1PGBI, C7.1PGBTI

Gen. Arr. Number: 502-7328

Source: European or China II

LEHE1167-00 (08/16)

www.Cat-ElectricPower.com

© 2016 Caterpillar  
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.