AGRICULTURE ATTACHMENTS

TACKLE MORE TASKS WHILE MITIGATING COSTS WITH YOUR CAT® MACHINE.

Cat Skid Steer Loaders, Multi Terrain Loaders, Compact Track Loaders, Compact Wheel Loaders, Backhoe Loaders, Small Wheel Loaders, Mini Excavators and Telehandlers

For more information, visit Cat.com/attachments or contact your local Cat dealer.



BUILT FOR IT.

AEXQ2312-02 _Agriculture Attachments_EAME June 2017

BUILT FOR IT.



MOVE MATERIAL, SPREAD FEED AND KEEP OPERATIONS ON SCHEDULE.

We offer more than a dozen agriculture attachments, all made to keep your operation on task and on schedule. Cat attachments can renew the life of your existing fleet. And they're designed to maximize Cat machine performance so you get more use at a lower cost.



AUGERS



Bore with better efficiency.

Our augers offer different speed and torque options for work in a variety of soils. We've engineered their speed to extract soil efficiently and their torque to prevent stalling in dense ground. Select from a range of auger bits.

Specifications

			aft Torque Pressure	
Attachment Models	Compatibility	Nm	(lb ft)	Drive Method
A14B	CTL, MTL, SSL, CWL	2304	(1700)	Direct Drive
A19B	CTL, MTL, SSL, CWL	4122	(3042)	Single Planetary
A26B	CTL, MTL, SSL, CWL	6830	(5040)	Double Planetary
A7B	MHEX	1105	(815)	Direct Drive
A14B	MHEX	2304	(1700)	Direct Drive
A19B	MHEX	4122	(3042)	Single Planetary
A26B	MHEX	6830	(5040)	Double Planetary
A 26B Pin-on	BHL	6830	(5040)	Double Planetary
BHL: Backhoe CTL: Compact CWL: Compact	Frack Loader M	HEX: Mini Ex TL: Multi Ter SL: Skid Stee	rain Loader	

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

BALE GRABS



Grab baled material with greater precision.

Use our bale grabs for grasping, carrying and placing large baled materials. Their tubular arms eliminate damage to the wrapping or bale itself, while the rigid, high-strength steel frame extends working life. This attachment also comes with hardened pins and easily accessible grease points for greater productivity and a bolt-on step for safer cab access.

Specifications

Attachment Models	Compatibility	Weight		Maxim openin	um g width		nl width sed arms
		kg	(lb)	mm	(in)	mm	(in)
1803 mm (71 in)	CTL, CWL, MTL, SSL	261	575	1803	71	940	37
2133 mm (84 in)	CTL, CWL, MTL, SSL	263	580	2133	84	918	36
CTL: Compact Tra CWL: Compact W			ti Terrain L Steer Load				

BALE SPEARS





Make moving bales simple.

Select from our single or dual spear design, both ideal for removing or placing bales in a stack. Our single-spear models include stabilizers and dual-spear models feature a high backrest for large loads. Spears are easily replaced and frames offer a bolt-on step.

Specifications

Attachment Models	Compatibility	Overall Width		Weigl	nt
		mm	(in)	kg	(lb)
990 mm (39 in) Single Tine	CTL, MTL, SSL	1285	(51)	70	(154)
1245 mm (49 in) Single Tine	CTL, MTL, SSL	1285	(51)	72	(158)
990 mm (39 in) Dual Tine	CTL, MTL, SSL	1407	(55)	118	(260)
1245 mm (49 in) Dual Tine	CTL, MTL, SSL	1407	(55)	121	(266)

CTL: Compact Track Loader MTL: Multi Terrain Loader SSL: Skid Steer Loader

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

BRUSHCUTTERS



Clear overgrowth effectively.

Reduce vegetation, brush and trees with an 80 mm (3 in) diameter or less into a coarse byproduct. Select from a range of lengths and widths.

Specifications

Attachment Models	Compatibility	Working Width		Tip Speed		Unit Weight	
		mm	(in)	m/min	(fpm)	kg	(lb)
BR160	CTL, MTL, SSL	1524	(60)	3987-5596	(13080-18360)	431	(950)
BR166	CTL, MTL, SSL	1676	(66)	3130-4395	(10270-14420)	476	(1050)
BR172	CTL, MTL, SSL	1829	(72)	3417-4795	(11210-15730)	499	(1100)
BR272	CTL, MTL, SSL	1829	(72)	4554-5992	(14940-19660)	508	(1120)
BR378	CTL, MTL, SSL	1981	(78)	4176-6032	(13700-19790)	535	(1180)

CTL: Compact Track Loader MTL: Multi Terrain Loader SSL: Skid Steer Loader

COUPLERS



Move quickly from task to task.

Our Dual Lock™ Pin Grabber Couplers allow operators to change attachments in seconds, increasing job efficiency and enabling one machine to do multiple tasks. We offer two, easy-to-use options: hydraulic (controlled from the cab) and mechanical. And all Cat models include primary and secondary locking systems to ensure what you put on your machine, stays on.

Specifications

Attachment Models	Compatibility	Weight	
		kg	(lb)
Dual Lock™	BHL, MHEX	14-89	(32-195)
Dual Lock™ Tilt	MHEX	112-198	(245-436)
Fusion™	SWL	252-392	(556-865)
Horizontal Pin Lock	CWL	181	(400)
IT - Loader	BHL	117-227	(390-500)
BHL: Backhoe Loader CWL: Compact Wheel Loader MHEX: Mini Excavator	SWL: Small Wheel Load	der	

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

HEAVY DUTY BUCKETS

Move harsh soils with minimal wear.

Dig, trench or backfill with our heavy duty buckets. They're made to excavate in abrasive soils and move large loads. Select from a range of bucket sizes and teeth.



Specifications

Attachment Models	Compatibility	Width Range		Capacity Ra	nge
		mm	(in)	m³	(yd³)
Digging	MHEX	230-270	(9-28)	0.014-0.111	(0.018-0.145)
Ditch Cleaning	MHEX	700-1600	(28-63)	0.027-0.421	(0.035-0.55)
Tilting Ditch Cleaning	MHEX	1000-1600	(40-63)	0.055-0.28	(0.071-0.366)
Heavy Duty	MHEX	300-914	(12-36)	0.05-0.39	(0.065-0.51)
Heavy Duty Capacity	MHEX	300-915	(12-36)	0.082-0.300	(0.107-0.392)
Heavy Duty Rock	MHEX	610-762	(24-30)	0.23-0.31	(0.30-0.405)
Grading	MHEX	1000-1500	(39-59)	0.09-0.52	(0.12-0.68)
Coral	BHL	305-762	(12-30)	0.06-0.19	(0.08-0.25)
Ditch Cleaning	BHL	1219-1524	(48-60)	0.37-0.57	(0.48-0.74)
Heavy Duty	BHL	305-914	(12-36)	0.08-0.44	(0.1-0.57)
Heavy Duty Rock	BHL	305-914	(12-36)	0.07-0.33	(0.09-0.43)
Grading	BHL	1200-1500	(47-60)	0.41-0.52	(0.54-0.68)
Soil Excavation	BHL	457-914	(18-36)	0.18-0.38	(0.23-0.5)
Standard Duty	BHL	305-914	(12-36)	0.08-0.29	(0.1-0.38)
High Capacity	BHL	305-914	(12-36)	0.13-0.46	(0.17-0.60)
BHL: Backhoe Loader MHEX: Mini Excavator					

GENERAL PURPOSE BUCKETS





Work with mildly abrasive materials.

Our general purpose buckets are ideal for digging in low-impact, moderately abrasive materials such as dirt, loam, gravel and clay. Select from a range of bucket sizes and teeth.

Specifications

Attachment Models	Compatibility	ty Width Range		Capacity Ran	ge
		mm	(in)	m^3	(yd³)
General Purpose	BHL	2262-2434	(89-96)	0.76-1.5	(1.0-2.0)
General Purpose	CTL, MTL, SSL	1524-2134	(60-84)	0.36-0.63	(0.47-0.82)
General Purpose	CWL	1880-2413	(74-95)	0.76-1.38	(1.0-1.80)
General Purpose	TH	1854-2445	(73-96)	0.76-1.0	(1.0-1.3)
General Purpose Performance Series	SWL	2550-2750	(100-108)	1.9-2.9	(2.5-3.8)
BHL: Backhoe Load CTL: Compact Trac CWL: Compact Wh	k Loader SS	L: Multi Terrain L: Skid Steer Loa /L: Small Wheel	der	TH: Telehand	ller

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

LIGHT MATERIAL BUCKETS





Move more in a single scoop.

Our light material buckets are designed to move high volumes of low-density material such as bedding, dry topsoil, fertilizer, feed and snow.

Specifications

Attachment Models	Compatibility	Width Range	•	Capacity Ra	nge
		mm	(in)	m^3	(yd³)
Light Material	CTL, MTL, SSL	1829-2438	(72-96)	0.69-0.93	(0.9-1.22)
Light Material	CWL	1870-2050	(74-81)	0.76-1.53	(1.0-2.0)
Light Material	SWL	2750	(108)	3.10-5.00	(4.00-6.50)
Light Material	TH	2550-2750	(100-108)	1.9-2.9	(2.5-3.8)
CTL: Compact Trac CWL: Compact Wh MTL: Multi Terrain	eel Loader SWL	Skid Steer Loa .: Small Wheel I Felehandler			

MATERIAL HANDLING BUCKETS



Load and unload with ease.

With a large capacity and optimal shape for loading, our material handling buckets are ideal for stockpiling, carrying, dumping and backfilling.

Specifications

Attachment Models	Compatibili	ity	Width Range	е	Capacity	Range
			mm	(in)	m³	(yd³)
Material Handling	CTL, CWL, N	ITL, SSL	2134-2591	(84-102)	1.07-1.33	(1.40-1.74)
Material Handling	TH		2418	(95)	1.5	(1.95)
,				(,		,
CTL: Compact Track			d Steer Loader			
CWL: Compact Whe MTL: Multi Terrain L		TH: Telel	nandler			

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

MULTI-PURPOSE BUCKETS



Use one bucket to do the job of many.

Our multi-purpose buckets are one of our most versatile buckets. With a clam design, bolt-on cutting edge and spill guard, they easily doze, grade, level and unload material.

Specifications

Attachment Models	Compatibility	Width Rang	Width Range		Range
		mm	(in)	m³	(yd³)
Multi-Purpose	BHL	2262-2425	(89-95)	1.0-1.2	(1.3-1.5)
Multi-Purpose	CTL, MTL, SSL	1524-2134	(60-84)	0.3-0.43	(0.39-0.56)
Multi-Purpose	CWL	1880-2413	(74-95)	0.76-1.6	(1.0-2.1)
Multi-Purpose	TH	1829-2418	(72-95)	0.37-1.0	(0.48-1.3)
CTL: Compact Track Loader SSL:		.: Multi Terrain I Skid Steer Loa Telehandler			

MATERIAL HANDLING ARMS



Carry and place with precision.

Safely transport non-uniform materials, as well as carry and plant trees or shrubs. Cat material handling arms offer two lift points, each set up to hold a locking hook capable of swiveling 360 degrees.

Specifications

Attachment Models	Compatibility	Retracted Length		ength	Extended Le	ngth
			mm	(in)	mm	(in)
Extendible	BHL, CWL, TH		2007	(79)	3937	(155)
Extendible	SWL		2760	(109)	4137	(163)
			Width w/ Sid	le Step	Maximum Ro	each
Fixed Length	CTL, CWL, MTL,	SSL, TH	1309	(52)	2134	(84)
BHL: Backhoe I CTL: Compact T CWL: Compact	Track Loader	SSL: Skid S	Terrain Loade Steer Loader I Wheel Loade		elehandler	

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

PALLET FORKS



Properly transport palletized materials.

From standard hay bales to stacked feedbags, our pallet forks were designed for stable transportation. Our frame features a tall backboard to secure the load for improved safety and efficiency.

Specifications

Compatibility	Tine Len	ıgth		Fork Tine Width	
	mm		(in)	mm	(in)
BHL	1067-137	2	(42-54)	127	(5.0)
CTL, MTL, SSL	910-1220)	(36-48)	100	(4)
TH	1219-152	24	(48-60)	100-152	(4-6)
	Tine Len	gth		Carriage Width	
CWL	1050-182	29	(41-72)	1397-1550	(55-61)
SWL	1220-152	24	(48-60)	1524	(60)
BHL: Backhoe Loader CTL: Compact Track Loa CWL: Compact Wheel L	MTL: Multi Terrain Lo ader SSL: Skid Steer Load		d Steer Loader	TH: Teleh	andler

RIPPERS



Tear up more terrain.

Built to cut through dense dirt, loosen rocky soil and break below the frost layer, Cat rippers are taking on some of the most challenging ground conditions. And because they're made for specific Cat models, they can better transfer machine power into ripping power.

Specifications

Attach Mode Lengtl	ls (Shank	Compatibility	Widt	h	Width	ı	Tip Rad	lius	Wei	ght
mm	(in)		mm	(in)	mm	(in)	mm	(in)	kg	(lb)
490	(19)	MHEX	232	(9.1)	660	(25.9)	650	(26)	45	(99)
676	(27)	MHEX	273	(10.7)	825	(32.4)	810	(32)	61	(134)
861	(34)	MHEX	346	(13.6)	1074	(42.2)	1039	(41)	107	(235)

MHEX: Mini Excavator

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

SECTIONAL SNOW PUSHES



Remove snow from uneven surfaces – in a single pass.

Our sectional snow pushes save time and reduce the amount of salt needed. They're ideal for parking lots, driveways, airport runways and storage lots. Select from a range of widths.

Specifications

Attachment Models	Compatibility	Moldboard Sections	Weight kg	(lb)	Coupler Interface
2.4 m (8 ft) Standard Duty	CTL, MTL, SSL	3	635	(1400)	SSL
3 m (10 ft) Standard Duty	CTL, MTL, SSL	4	771	(1700)	SSL
3.6 m (12 ft) Standard Duty	CTL, CWL, MTL, SSL	5	907	(2000)	SSL
3.6 m (12 ft) Industrial Duty	SWL	4	1548	(3413)	Fusion™
4.2 m (14 ft) Industrial Duty	SWL	5	1729	(3813)	Fusion™
4.8 m (16 ft) Industrial Duty	SWL	6	1911	(4213)	Fusion™
CTL: Compact Track Loade	r SSL: Skid Steer L	.oader			

SWL: Small Wheel Loader

CWL: Compact Wheel Loader MTL: Multi Terrain Loader

SILAGE DEFACERS



Powering through the bunkers.

Featuring high tensile strength teeth positioned in a helical pattern, our silage defacers free and work loose compacted silage bunkers without damaging or cutting the material. They're also equipped with dual in-board hydraulic motors for stall-free operation and peak torque to power through the densest of silage bunks.

Specifications

Attachment Models	Compatibility	Overal	l Width	Weigh	t	Flow Ra	ange
		mm	(in)	kg	(lb)	L/min	(GPM)
DFS118	CTL, CWL, MTL, SSL	1841	72.5	425	937	75-90	20-23
DFS121	CTL, CWL, MTL, SSL	5146	84.5	477	1052	75-90	20-23
DFS124	CTL, CWL, MTL, SSL	2451	96.5	503	1109	75-90	20-23
CTL: Compact Ti CWL: Compact \			lti Terrain Lo Steer Load				

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

STRAIGHT SNOW PUSHES



Remove snow in a single pass.

Our straight snow pushes save time and reduce the amount of salt needed. They're ideal for parking lots, driveways, airport runways and storage lots. Select from a range of widths.

Specifications

Attachment Models	Compatibility	Weight		Coupler Interface
		kg	(lb)	
2.4 m (8 ft) Push Rubber Edge	CTL, CWL, MTL, SSL	176	(389)	SSL
3 m (10 ft) Push Rubber Edge	CTL, CWL, MTL, SSL	197	(434)	SSL
3.6 m (12 ft) Push Rubber Edge	CTL, CWL, MTL, SSL	216	(477)	SSL
2.4 m (8 ft) Push Steel Edge	CTL, CWL, MTL, SSL	176	(389)	SSL
3 m (10 ft) Push Steel Edge	CTL, CWL, MTL, SSL	197	(434)	SSL
3.6 m (12 ft) Push Steel Edge	CTL, CWL, MTL, SSL	216	(477)	SSL
3 m (10 ft) Push	BHL, CWL, SWL	371	(818)	IT
3.6 m (12 ft) Push	BHL, CWL, SWL	428	(943)	IT
3.6 m (12 ft) Push	SWL	598	(1318)	Fusion™
4.2 m (14 ft) Push	SWL	653	(1439)	Fusion™
4.8 m (16 ft) Push	SWL	701	(1546)	Fusion™
BHL: Backhoe Loader CTL: Compact Track Loader CWL: Compact Wheel Loader	MTL: Multi Terrain Loader SSL: Skid Steer Loader SWL: Small Wheel Loader			

SNOW PLOWS

Scrape snow and ice from ground surfaces.

Windrow snow to either side of the machine or directly ahead. Our snow plows are equipped with a trip edge to clear unseen obstacles. Select from a range of widths.



Specifications

Attachment Models	Compatibility	Weight kg	(lb)	Coupler Interface
1.8 m (6 ft) Plow	CTL, CWL, MTL, SSL	155	(341)	SSL
2.1 m (7 ft) Plow	CTL, CWL, MTL, SSL	185	(409)	SSL
2.4 m (8 ft) Plow	CTL, CWL, MTL, SSL	196	(432)	SSL
2.7 m (9 ft) Plow	CTL, CWL, MTL, SSL	206	(455)	SSL
3 m (10 ft) Plow	CTL, CWL, MTL, SSL	216	(477)	SSL
2.7 m (9 ft) Plow	CWL	340	(750)	IT
3 m (10 ft) Plow	CWL	397	(875)	IT
3.6 m (12 ft) Plow	CWL	423	(932)	IT
2.7 m (9 ft) Plow	BHL	340	(750)	IT
3 m (10 ft) Plow	BHL	397	(875)	IT
3.6 m (12 ft) Plow	BHL	423	(932)	IT
3 m (10 ft) Plow	SWL	439	(968)	Fusion™
3.6 m (12 ft) Plow	SWL	496	(1093)	Fusion™
4.2 m (14 ft) Plow	SWL	561	(1236)	Fusion™
BHL: Backhoe Loader CTL: Compact Track Loader CWL: Compact Wheel Loader	MTL: Multi Terrain Loader SSL: Skid Steer Loader SWL: Small Wheel Loader			

Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

THUMBS



Go from digging to material handling.

Our thumbs work with buckets and rippers to grab, pick, or sort material. They're offered with stiff link or are hydraulically controlled from the cab, opening and closing around loads. And when you don't need it, the thumb can recline against the machine stick.

Specifications

Attachment Models	Compatibility	Rotation Angle
		degrees
Hydraulic	MHEX	116-133
Stiff Link	MHEX	81
Hydraulic Progressive Link	MHEX	174-181

MHEX: Mini Excavator

UTILITY GRAPPLE FORKS



Transport light material — in less time.

With a series of straight tines, our utility grapple fork can pierce bundles of straw, hay and dried waste. The curved upper jaw holds material on the tines to help retain the mass.

Specifications

Compatibility	Fork Width	Fork Width		e Length
	mm	(in)	mm	(in)
CTL, MTL, SSL	1676-1829	(66-72)	940	(37)

CTL: Compact Track Loader MTL: Multi Terrain Loader SSL: Skid Steer Loader


Certain models within the family of machines listed may not be compatible with the attachment. Please consult your Cat dealer for further information.

WORK WITHOUT WORRY.

We back our attachments with a one-year warranty and ongoing Cat dealer support. It's another way we're helping protect what you rely on.



COMPATIBILITY

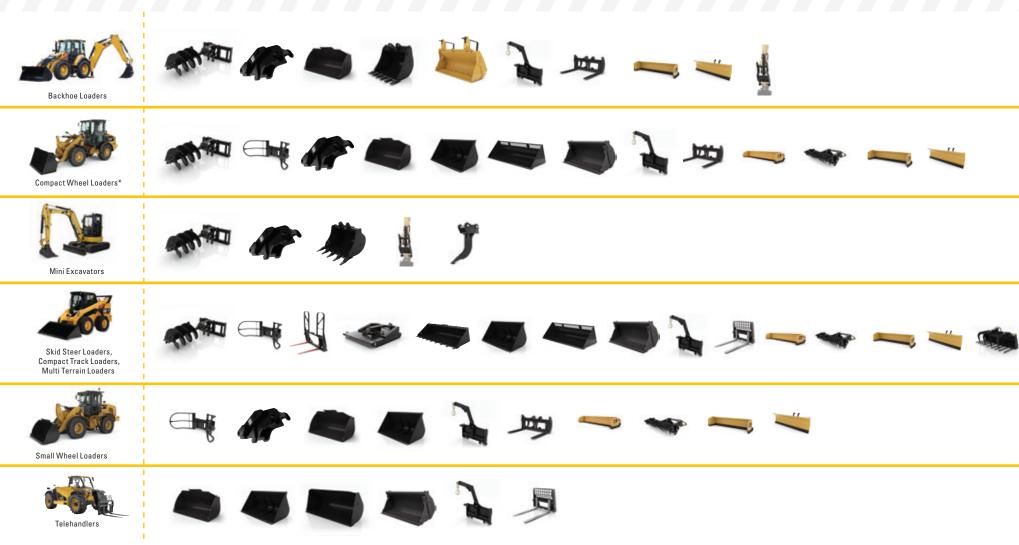

^{*}If Compact Wheel Loader is equipped with an ISO coupler, the ISO/Skid Steer Loader-bracket is needed to be able to pick up Skid Steer Loaders, Compact Track Loaders and Multi Terrain Loader attachments.

