

CAT® BACKHOE LOADER ATTACHMENT OPTIONS

» Get Multiple Machines Out of One

For more information,
visit Cat.com/attachments
or contact your local
Cat dealer.



BUILT FOR IT.™

AEXQ2120-00 December 2016

© 2016 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

BUILT FOR IT.™



MORE JOBS. MORE POSSIBILITIES.

Equip one machine to take on more jobs.

Invest in what you already own — give your machine Cat® attachments and equip it to do more. And because our attachments are engineered, balanced and tested to each Cat model, they promise to minimize stress and optimize performance. Browse our lineup and find the tools to make your work easier.



AUGERS



Bore with better efficiency.

Our augers offer different speed and torque options for work in a variety of soils. We've engineered their speed to extract soil efficiently and their torque to prevent stalling in dense ground. Select from a range of auger bits.

Specifications

Attachment Model	Machine Models	Drive Shaft Torque @ Max Pressure		Drive Method	
		Nm	(lb ft)		
A26B	422F2-444F2	6830	(5040)	Double Planetary	
Backhoe Loaders					
422F2	427F2	428F2	432F2	434F2	444F2

AUGER BITS



Standard Bit

- Factory standard
- For drilling holes with a large diameter
- For drilling holes from 152mm to 914mm
- Rock drill head can be installed instead of the standard bits on the same auger



Tree Bit

- Tapered tip
- For drilling holes with a 610 mm or 914 mm mouth and a narrow base of 305 mm or 457 mm to properly fit a root ball or holes with a small diameter to fill with mulch or fertilizer



Industrial Bit

- Excellent tooth retention while digging
- Allows for easy removal and installation
- Typical for heavier application than only sand, especially suitable when gravel is involved and needs to be picked up by the auger bits while drilling.



Standard Rock Drill Head Bit

- Transforms a standard bit into a rock drill bit with equal auger diameters
- For severe ground conditions including rock and various types of concrete
- Bolt-on design for easy removal when returning to normal conditions

BROOMS



Do some serious sweeping.

Cat brooms are built for even-pressured sweeping for the most thorough debris removal. Our angle brooms are made for moving and windrowing debris aside. Our pickup brooms gather debris as they work and feature a gutter brush for building-base and close-to-the-curb cleaning. And our utility brooms gather light debris, ideal for factory floors. From collection hoppers to dust control features, we offer options for every application.

Specifications

Attachment Models		Machine Models		Sweeping Width		Brush Diameter	
				mm	(in)	mm	(in)
Angle	BA25	428F2-444F2*		2500	(98)	700	(28)
Pickup Broom	BP25	428F2-444F2*		2500	(98)	700	(28)
Special Application	2.5	428F2-444F2*		2500	(98)	915	(36)

*Machine must be equipped with IT coupler.

Backhoe Loaders			
428F2	432F2	434F2	444F2

BUCKETS



Loader bucket



Backhoe buckets

Move more material in less time.

The shape of our buckets improves digging, loading and material retention. Compared to most competition, we have more capacity per every millimeter of width. And each is made of high-strength, tempered steel, offering 50 percent more wear life than the industry standard. Select from a range of bucket teeth.

Specifications

Attachment Models		Machine Models	Width Range		Capacity Range	
			mm	(in)	m³	(yd³)
Loader (Front)	General Purpose	422F2-444F2	2262-2434	(89-96)	0.76-1.5	(1.0-2.0)
	Multi-Purpose	422F2-444F2	2262-2425	(89-95)	1.0-1.2	(1.3-1.5)
Hoe (Rear)	Cribbing	422F2-444F2	230	(9)	—	—
	Ditch Cleaning	422F2-444F2	1219-1524	(48-60)	0.37-0.57	(0.48-0.74)
	Heavy Duty	422F2-444F2	305-914	(12-36)	0.08-0.44	(0.1-0.57)
	Heavy Duty Rock	422F2-444F2	305-914	(12-36)	0.07-0.33	(0.09-0.43)
	Standard Duty	422F2-444F2	305-914	(12-36)	0.08-0.29	(0.1-0.38)
	High Capacity	422F2-444F2	305-914	(12-36)	0.13-0.46	(0.17-0.60)

Backhoe Loaders			
422F2	427F2	428F2	432F2
434F2	444F2		

COLD PLANERS



Mill asphalt and concrete quickly.

Our cold planers are made to smooth imperfections and remove deteriorated pavement or paint where dedicated planers can't. A hydraulic side-shift feature allows for planing close to curbs, walls and other obstructions. And our self-leveling technology ensures consistent ground contact.

Specifications

Attachment Model	Machine Models	Drum Width		Number of Bits (conical)
		mm	(in)	
PC404	422F2-444F2	450	(18)	48

Backhoe Loaders
422F2 427F2 428F2 432F2 434F2 444F2

COUPLERS



Move quickly from task to task.


Our Dual Lock™ Pin Grabber Couplers allow operators to change attachments in seconds, increasing job efficiency and enabling one machine to do multiple tasks. We offer two, easy-to-use options: hydraulic (controlled from the cab) and mechanical. And all Cat models include primary and secondary locking systems to ensure what you put on your machine, stays on.

Specifications

Attachment Models		Machine Models	Weight kg	(lb)
Loader	Integrated Toolcarrier (IT)	428F2-444F2	205-237	(452-523)
Hoe	Dual Lock™ Pin Grabber	422F2-444F2	87	(192)

Backhoe Loaders
422F2 427F2 428F2 432F2 434F2 444F2

FORKS

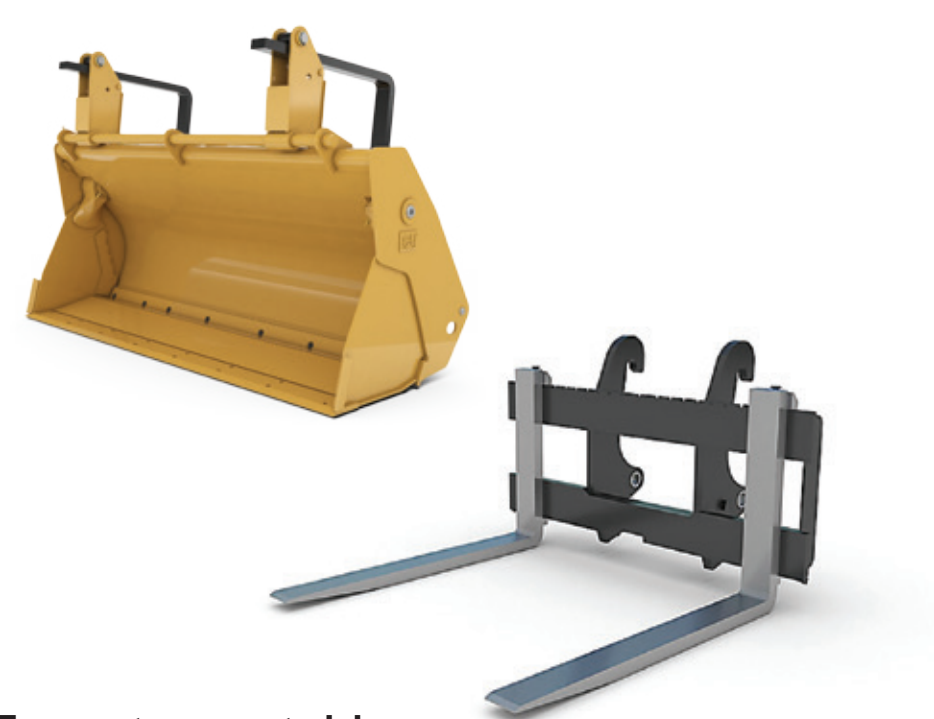

Transport more materials.

From stacked feedbags to loose straw, load and transport in less time. Our pallet forks were specifically designed to transport palletized items. And our fold over forks improve material retention so work is always neat and always efficient.

Specifications

Attachment Models	Machine Models	Tine Length		Fork Tine Width	
		mm	(in)	mm	(in)
Fold Over	422F2-444F2	1067	(42)	80	(3.2)
Pallet	427F2-444F2	1067-1372	(42-54)	127	(5.0)

Backhoe Loaders
422F2 427F2 428F2 432F2 434F2 444F2



HAMMERS



Separate the toughest surfaces.

Our hammers were designed for hard hits, reducing rock and concrete materials. Each features an automatic shut-off and a buffering system to reduce machine vibrations. And some of our hammers are fully enclosed to suppress noise.

Specifications

Attachment Models	Machine Models	Operating Weight*		Blow Rate	Tool Diameter	
		kg	(lb)		mm	(in)
H65E/H65Es Flat-Top	422F2-444F2	260-390	(573-860)	720-1740	68	(2.68)
*Maximum						
Backhoe Loaders						
422F2	427F2	428F2	432F2	434F2	444F2	

MATERIAL HANDLING ARMS




Carry and place with precision.

Safely transport non-uniform materials, as well as carry and plant trees or shrubs. Cat material handling arms are extendable and offer two lift points, each set up to hold a locking hook with 360 degrees of rotation.

Specifications

Attachment Model	Machine Models	Retracted Length		Extended Length	
		mm	(in)	mm	(in)
Extendible	428F2-444F2*	2007	(79)	3937	(155)
*Machine must be equipped with IT coupler.					
Backhoe Loaders					
428F2	432F2	434F2	444F2		

SNOW PLOWS

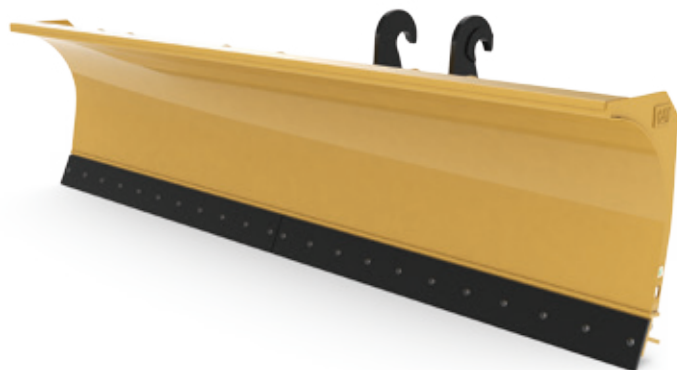

Quickly clear ground.

Our snow plows are made to move material from parking lots, roads, runways and ditches. Easily direct material to a desired side by angling left or right. After heavy use, reverse plow edges to restore close-to-the ground contact.

Specifications

Attachment Models	Machine Compatability	Weight		Coupler Interface
		kg	(lb)	
2.7 m (9 ft) Plow	428F2-444F2	340	(750)	IT
3.0 m (10 ft) Plow	428F2-444F2	397	(875)	IT
3.6 m (12 ft) Plow	428F2-444F2	423	(932)	IT

Backhoe Loaders
428F2 432F2 434F2 444F2

STRAIGHT SNOW PUSHES



Remove snow in a single pass.

Remove snow in a single pass. Our straight snow pushes save time and reduce the amount of salt needed. They're ideal for parking lots, driveways, airport runways and storage lots. Width ranges from 3 to 3.6 meters.

Specifications

Attachment Models	Machine Compatability	Weight		Coupler Interface
		kg	(lb)	
3.0 m (10 ft) Push	428F2 - 444F2	371	(818)	IT
3.6 m (12 ft) Push	428F2 - 444F2	428	(943)	IT

Backhoe Loaders
428F2 432F2 434F2 444F2

VIBRATORY PLATE COMPACTORS



Pack with power.

Cover more ground with our vibratory plate compactor’s large surface and pack soil faster with its high-power pulses. We’ve even built in flexible isolators to guard against excessive vibrations.

Specifications

Attachment Model	Machine Models	Impulse Force		Cycles/min	Base Plate Width	
		kN	(lbf)		mm	(in)
CVP40	422F2 - 444F2	40	(8928)	2200	584	(23)

Backhoe Loaders
422F2 427F2 428F2 432F2 434F2 444F2



WORK WITHOUT WORRY.

We back our attachments with a one-year warranty and ongoing Cat dealer support. It's another way we're helping protect what you rely on.



QUICK REFERENCE

Find attachments made for your work.

	Augers	Brooms	Buckets	Cold Planers	Couplers	Forks	Hammers	Material Handling Arms	Snow Plows
Site Prep and Demolition		x	x	x	x	x	x	x	x
Concrete Prep and Flatwork		x	x	x	x	x	x	x	
Material Handling			x		x	x		x	x
Excavation and Earth Moving	x		x		x				
Trenching and Utilities	x	x	x		x	x		x	
Finishing and Site Clean-Up		x	x		x	x	x	x	x

	Straight Snow Pushes	Vibratory Plate Compactors
Site Prep and Demolition	x	
Concrete Prep and Flatwork		x
Material Handling	x	
Excavation and Earth Moving		
Trenching and Utilities		x
Finishing and Site Clean-Up	x	x

Find attachments made for your machine.

	Augers	Brooms			Buckets									Cold Planers
Machine Models	A26B	Angle (BA25)	Pickup (BP25)	Special Application (2.5)	Front - General Purpose	Front - Multi-Purpose	Rear - Cribbing	Rear - Ditch Cleaning	Rear - Heavy Duty	Rear - Heavy Duty Rock	Rear - Mud Buckets	Rear - Standard Duty	Rear - High Capacity	PC404
422F2	x				x	x	x	x	x	x	x	x	x	x
427F2	x	x	x	x	x	x	x	x	x	x	x	x	x	x
428F2	x	x	x	x	x	x	x	x	x	x	x	x	x	x
432F2	x	x	x	x	x	x	x	x	x	x	x	x	x	x
434F2	x	x	x	x	x	x	x	x	x	x	x	x	x	x
444F2	x	x	x	x	x	x	x	x	x	x	x	x	x	x

QUICK REFERENCE (CONTINUED)

Machine Models	Couplers*		Forks		Hammers	Material Handling Arms	Snow Plows			Straight Snow Pushes		Vibratory Plate Compactors
	Loader - IT	Hoe - Dual Lock™ Pin Grabber	Fold Over	Pallet	H65E/H65Es Flat-Top	Extendible	2.7 m (9 ft)	3.0 m (10 ft)	3.6 m (12 ft)	3.0 m (10 ft)	3.6 m (12 ft)	CVP40
422F2		x	x		x							x
427F2	x	x	x	x	x	x	x	x	x	x	x	x
428F2	x	x	x	x	x	x	x	x	x	x	x	x
432F2	x	x	x	x	x	x	x	x	x	x	x	x
434F2	x	x	x	x	x	x	x	x	x	x	x	x
444F2	x	x	x	x	x	x	x	x	x	x	x	x

*Quick Coupler IT for 427F2 and 428F2 available as a kit.