

2200 Series 2206D-E13TA Industrial Engine

China Nonroad Stage III, Brazil MAR-1, UN R96 Stage IIIA
287-388 kW / 385-520 hp


The ability to power your machine line-up with one engine supplier is truly achievable with Perkins. We have introduced a platform of 9-18 litre industrial engines that completes our market-leading industrial power range and covers 8.8-597 kW (11.8-800 hp).

This model is a turbocharged, air-to-air chargecooled, 12.5 litre, 6 cylinder product capable of producing 388 kW (520 hp).

The exceptional power density and reliability of these engines make them an ideal choice for applications operating in countries that meet China Nonroad Stage III, Brazil MAR-1, and UN R96 Stage IIIA emissions standards.

To support the demands of your machine installation we offer a choice of engine configurations and options. The robust technology allows you to integrate these engines into your equipment with the minimum of re-engineering.

Perkins has developed a reputation for designing and building reliable and durable engines for the most demanding applications. Choosing Perkins as your engine supplier means your development costs can be reduced and your machines are future-proofed to meet anticipated emissions standards.

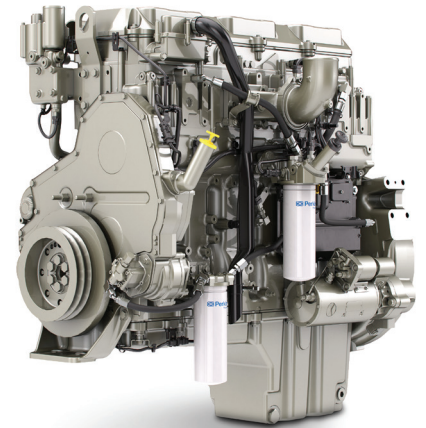

Specification		
Number of cylinders	6 vertical in-line	
Bore and stroke	130 x 157 mm	5.1 x 6.2 in
Displacement	12.5 litres	763 cubic in
Aspiration	Turbocharged aftercooled	
Cycle	4 stroke	
Combustion system	Direct injection	
Compression ratio	17.3:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	34 litres	8.9 US gal
Cooling system	Liquid	
Total coolant capacity	14.2 litres	3.8 US gal

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN3117/11/18 Produced in England ©2018 Perkins Engines Company Limited

 **Perkins**®

THE HEART OF EVERY GREAT MACHINE

2200 Series 2206D-E13TA Industrial Engine

China Nonroad Stage III, Brazil MAR-1, UN R96 Stage IIIA
287-388 kW / 385-520 hp

Features and benefits

Dependable power

- World-class manufacturing capability and processes coupled with proven core engine designs assure reliability, quiet operation and many hours of productive life

High performance

- Simple and efficient turbocharger provides optimal air management and improved fuel efficiency

Lifetime of low cost

- Fuel consumption optimised to match operating cycles of a wide range of equipment and applications.
- Capability of 500 hour oil change intervals enables low-cost maintenance

Fuel and oil

- Approved for operation on biodiesel* concentrations of up to 20%*

Package size

- Exceptional power density enables standardisation across numerous applications. Multiple installation options available to minimize total package size

Local support, global coverage

- Perkins recognise that the customer relationship is important to machine manufacturers and we can offer a range of flexible solutions to help provide appropriate support, either to the OEM's network or directly to the machine customer
- With highly trained Perkins distributors in thousands of communities in over 180 countries, you are never far away from expert product knowledge, genuine parts and a range of advanced diagnostic technology for keeping your engine in peak condition
- To find your local distributor: www.perkins.com/distributor

*Subject to conformance with ASTM D6751 and EN14214

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN3117/11/18 Produced in England ©2018 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

2200 Series 2206D-E13TA Industrial Engine

China Nonroad Stage III, Brazil MAR-1, UN R96 Stage IIIA
287-388 kW / 385-520 hp

Technical information

Air inlet

- Turbocharged aftercooled

Control system

- Full electronic control system
- All connectors and wiring looms waterproof and designed to withstand harsh off-highway environments
- Flexible and configurable software features and well supported SAE J1939 CAN bus enables highly integrated machines

Cooling system

- Vertical outlet thermostat housing, centrifugal water pump
- Detailed guidance on cooling system design and validation available to ensure machine reliability

Flywheel and housing

- Wide choice of drivetrain interfaces, SAE1 configurations

Fuel and fuel system

- Mechanical Unit Injector fuel system, controlled electronically

Oil system

- Choice of sumps for different applications
- Open crankcase ventilation system with fumes disposal (optional OCV filter system)
- Oil cooler, oil filler, oil filter, oil dipstick, oil pump (gear-driven)

Power take-off

- SAE1 flywheel housings available with optional SAE B and SAE C power take-off drives, including dual rear PTO options
- Engine power can also be taken from the front of the engine on some applications

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.



Publication No. PN3117/11/18 Produced in England ©2018 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

2200 Series 2206D-E13TA Industrial Engine

China Nonroad Stage III, Brazil MAR-1, UN R96 Stage IIIA
287-388 kW / 385-520 hp

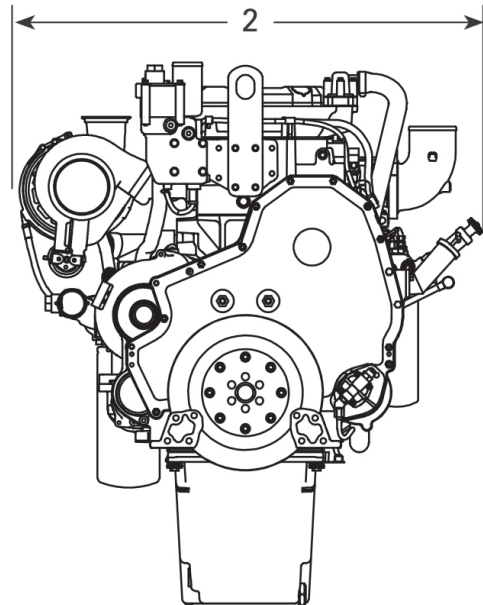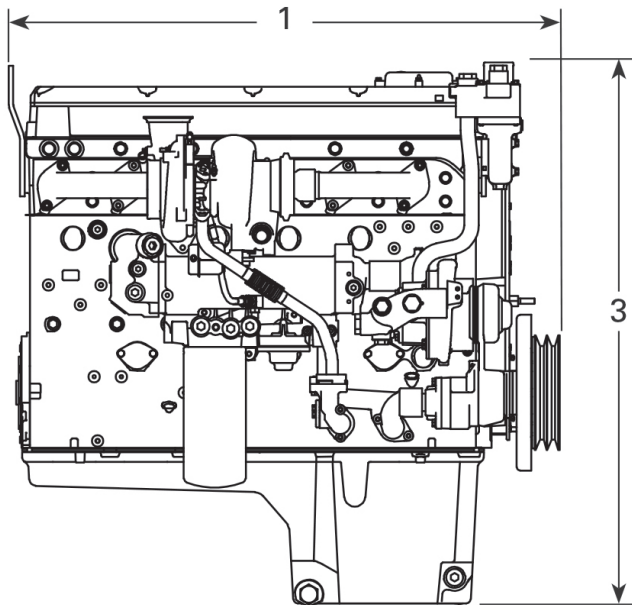

Engine package weights and dimensions

1	Length	1295 mm	51.0 in
2	Width	1186 mm	46.7 in
3	Height	1054 mm	41.5 in
	Weight (dry)	908 kg	2002 lb

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.



Publication No. PN3117/11/18 Produced in England ©2018 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

2200 Series 2206D-E13TA Industrial Engine

China Nonroad Stage III, Brazil MAR-1, UN R96 Stage IIIA
287-388 kW / 385-520 hp

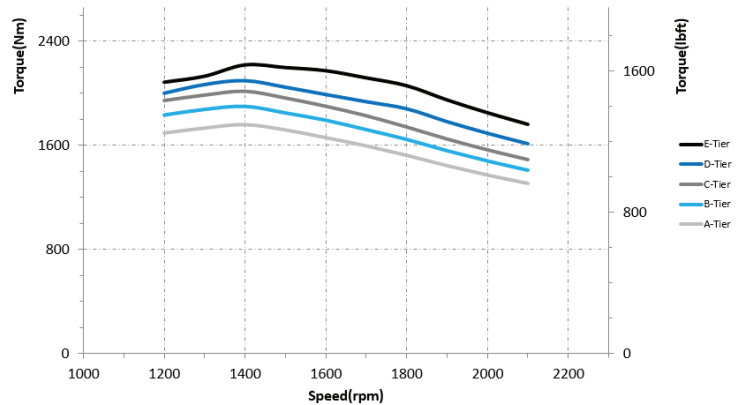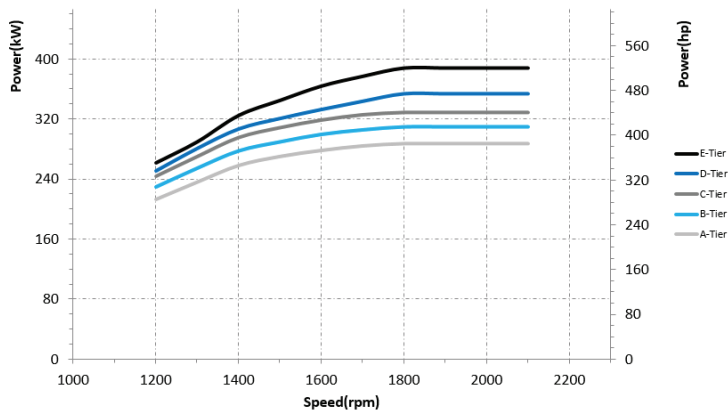

Rating type	Speed rpm	Power kW	Power hp	Torque Nm	Torque lb·ft	Speed rpm
A	1800-2100	287	385	1760	1298	1400
B	1800-2100	310	415	1896	1399	1400
C	1800-2100	328	440	2011	1484	1400
D	1800-2100	354	475	2095	1545	1400
E	1800-2100	388	520	2215	1634	1400

Rating definitions and conditions

IND-A Continuous heavy-duty service where the engine is operated at maximum power and speed up to 100% of the time without interruption or load cycling.

IND-B for service where power and/or speed are cyclic (time at full load not to exceed 80%).

IND-C (Intermittent) is the horsepower and speed capability of the engine where maximum power and/or speed are cyclic (time at full load not to exceed 50%).

IND-D For service where maximum power is required for periodic overloads (time at full load not to exceed 10% of the duty cycle).

IND-E For service where maximum power is required for a short time for initial starting or sudden overload. For emergency service where standard power is unavailable (time at full load not to exceed 5% of the duty cycle).

Rating Conditions for Diesel Engines – 7 litre and higher

All rating conditions are based on SAE J1995, inlet air standard conditions of 99 kPa (29.31 in. Hg) dry barometer and 25°C (77°F) temperature. Performance is measured using a standard fuel with fuel gravity of 35° API having a lower heating value of 42,780 kJ/kg (18,390 btu/lb) when used at 29°C (84.2°F) with a density of 838.9 g/L.

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN3117/11/18 Produced in England ©2018 Perkins Engines Company Limited

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE