



Progress Rail serves the vegetation management industry with reliable Kershaw equipment to tackle tough maintenance jobs, accessing sites quickly and easily. Suitable for a variety of applications, our machines can perform tree and brush clearing for utilities, landscaping contractors, golf courses and residential usage, right-of-way clearing and more.

The SkyTrim 75HRT is an over the road, rubber-tired prime mover vehicle with a rear bed-mounted special cab and an attached telescoping boom with saw-type cutter head designed to trim trees. The machine is equipped with hydraulically deployed rail wheels for operation on the railroad.

Progress Rail
A Caterpillar Company

800-633-5766

progressrail.com

🐦 @Progress_Rail

KERSHAW SKYTRIM 75HRT

Frame: Welded construction platform. High-strength alloy steel superstructure.

Weight: Approximately 42,000 lbs.

Propel System: Over the road propel or Hi Rail propel is provided by the prime mover. Work propel is controlled by a special cab operated creep drive system with 5 mph max. speed.


Brakes: Front Hi Rail wheels are equipped with pneumatically operated brakes applied to the wheel tread. Rear braking is provided by the prime mover. Hi Rail braking application is controlled from a single foot pedal in the rear bed tree trimmer cab.

Hydraulic System: Transmission PTO driven hydraulic pumps. Hydraulic reservoir has in-tank filtration with a clean-out port and shutoff valve. The machine is equipped with an electric emergency hydraulic pump. Upper structure tilt system and boom up/down system equipped with lock valves for added safety.

Electrical System: 12 volt dc negative ground with engine driven alternator and two 12 volt batteries. Equipped with safety electric strobe lights.

FRA Compliant Features: Travel lights, horn, backup alarm, brake lights, first aid kit, and fire extinguisher.

Minimum Prime Mover Requirements: 370 hp, 24-inch front frame extensions to accommodate Hi Rail gear. 20-inch unobstructed frame beyond rear tangent point of rear most tire and forward edge of rear bumper. 269-inch wheelbase to centerline of rear tandem. 80-inch rear frame overhang and GVWR of 58,000.

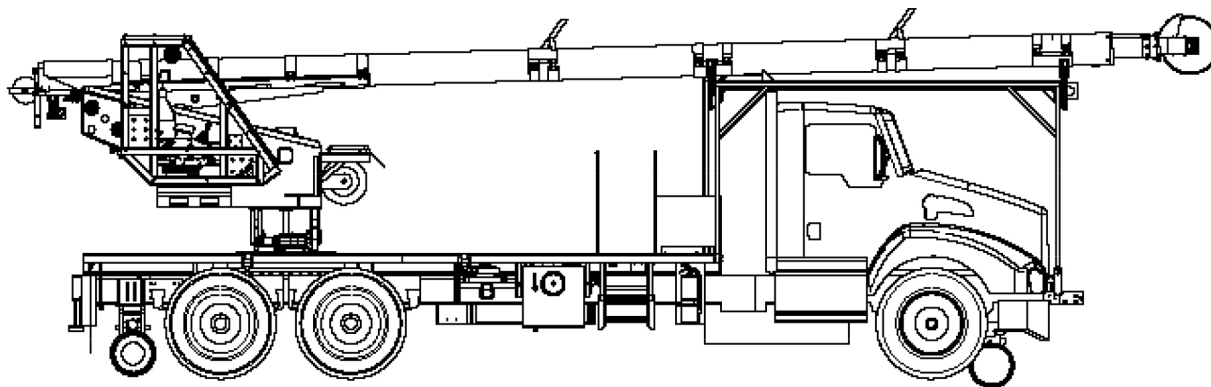

Tree Trimmer Cab: Equipped with 1 1/4" tinted Lexgard® top, engine instruments, and ergonomic seat. Equipped with light touch hydraulic pilot pressure joystick for extend-lift-swing-tilt boom controls. Heavy duty swing bearing with worm gear drive for maximum tooth engagement. Access door is full length tinted Lexgard® with positive latch and steel reinforcing frame.

Boom: Telescoping composite construction with 75 ft. reach from ground. Telescoping boom driven with #50 chain. Each unit is electrically insulated and tested to ANSI A92.2-2001 Category C standards to 100 kv for maximum operator safety. Equipped with single 24 inch diameter carbide-tipped saw turning @ 2800 rpm.

Capacities: Fuel: 100 gal. **Hydraulic:** 30 gal.

Optional Equipment: Options available upon request.

Progress Rail
A Caterpillar Company

800-633-5766

progressrail.com

▼ @Progress_Rail