



# Cat<sup>®</sup> Skeleton Buckets

SKID STEER LOADERS  
MULTI TERRAIN LOADERS  
COMPACT TRACK LOADERS  
COMPACT WHEEL LOADERS

Cat<sup>®</sup> Skeleton Buckets are versatile buckets used in a variety of applications including agriculture, general construction, demolition, landscaping and scrap handling segments. The skeleton bucket is an ideal attachment for a range of tasks from screening larger debris to reclaiming rock and landscaping materials buried by sediment material.

#### Features:

##### Thick diameter rods

- Thick diameter rods are durable and well suited to handle larger rocks.

##### Rock dam

- Rock dam improves material retention, reduces spillage and increases productivity.

##### Thick rod tine points

- Thick rod tine points improve breakout force by initially separating rock from soil more efficiently than a cutting edge.

##### Welded gussets

- Welded gussets between two rod tine points prevents yielding of corner of bucket.

##### Wide rod tine spacing



- Wide rod tine spacing allows for quicker and greater material separation.

## Compatibility

Model	Machines
2010 mm (79 in)	216B3, 226B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C2, 903D, 906K, 907K, 908K, 906M, 907M, 908M
2207 mm (87 in)	216B3, 226B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C2, 903D, 906K, 907K, 908K, 906M, 907M, 908M
2400 mm (94 in)	216B3, 226B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C2, 903D, 906K, 907K, 908K, 906M, 907M, 908M

# Cat® Skeleton Buckets

## Specifications

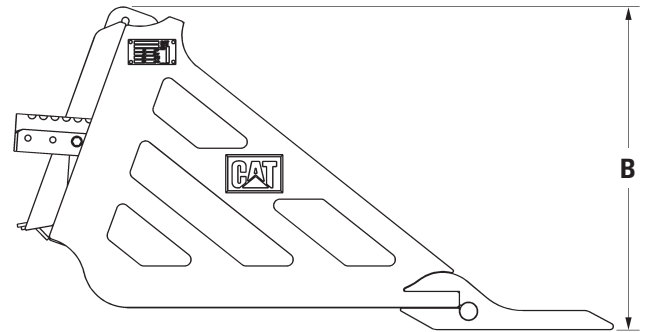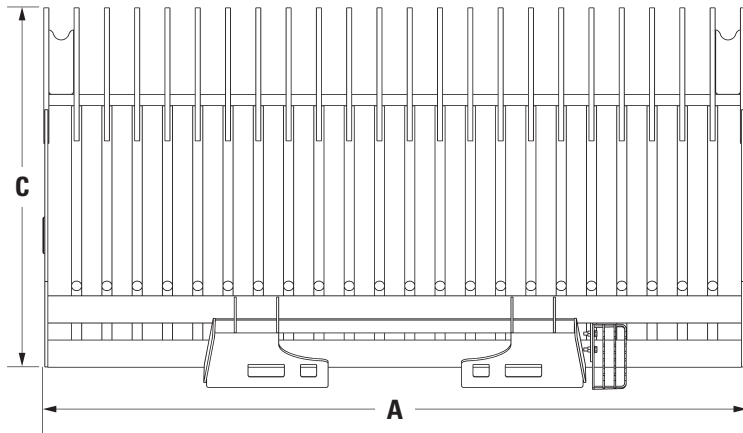

			2010 mm (79 in)		2207 mm (87 in)		2400 mm (94 in)	
<b>A</b> Width	mm	(in)	2010	(79)	2207	(87)	2400	(94)
<b>B</b> Height	mm	(in)	644	(25.5)	644	(25.5)	644	(25.5)
<b>C</b> Length	mm	(in)	1199	(47)	1199	(47)	1199	(47)
Weight	kg	(lb)	336	(741)	363	(800)	390	(860)
Sidewall Thickness	mm	(in)	10	(0.4)	10	(0.4)	10	(0.4)
Width between Rods	mm	(in)	64	(2.5)	64	(2.5)	64	(2.5)
Rod Diameter	mm	(in)	32	(1.25)	32	(1.25)	32	(1.25)
Number of Rod Tines			20		22		24	

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEHQ8151 (08-2018)

© 2018 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

