

# C9 ACERT™

## Sound Attenuated Level 2 Enclosure DTO 50 Hz: 230-275 kVA


### Features

- Robust/Highly Corrosion-Resistant Construction
- Galvanized steel construction level 2 enclosure meeting EU noise levels
- Enclosure Designed for 43oC Ambient Capability
- Factory installed Heavy Duty Fabricated 6mm steel base frame with integral fuel tank
- Canister Airfilter

### Enclosure Package Operating Characteristics, Weights & Dimensions

Model	LWA	Sound Pressure Levels dBA @100% Load		Mass* kg	Generator Set Overall Size (mm)			Fuel Capacity	
		1 m	7m		Length	Width	Height	Fillable	Usable
		Litres	Litres						
DE275E0	97	78.5	70	2859	3981	1410	2032	542	508
DE250E0		78	69.5						

\*Includes enclosed generator set filled with oil and coolant (no fuel). Exact weight is dependent on options

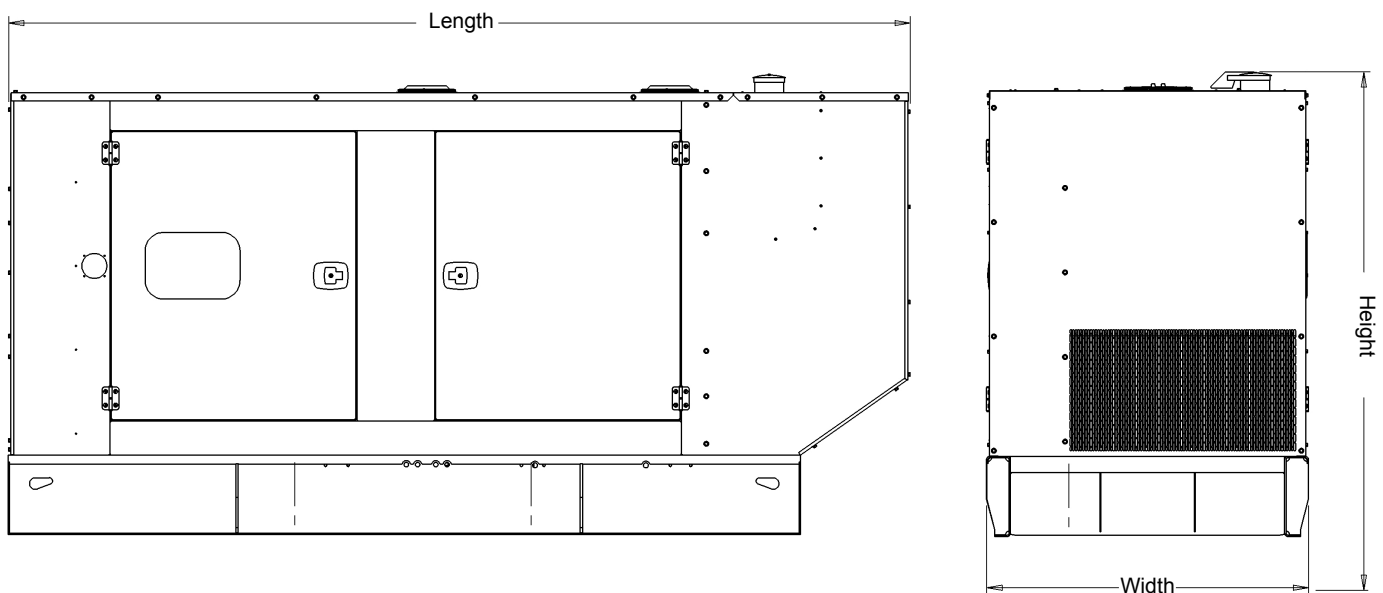

Materials and specifications are subject to change without notice.  
 CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.