



# 330 GC

## Hydraulic Excavator

# Technical Specifications

### Engine

Engine Model	Cat® C7.1	
Net Power – ISO 9249	158 kW	212 hp
Gross Power – ISO 14396/SAE J1995	159 kW	213 hp
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in <sup>3</sup>

- China Nonroad Stage III, UNECE R96 Stage IIIA and Brazil MAR-1 emission standards, equivalent to U.S. EPA Tier 3/ EU Stage IIIA.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air cleaner, muffler, and alternator.
- Rating at 1,800 rpm.

### Engine rpm

Operation	1,750 rpm	
Travel	1,750 rpm	

### Swing Mechanism

Swing Speed	11.50 rpm	
Swing Torque	82 kN·m	60,628 lbf-ft

### Weights

Operating Weight	29 600 kg	65,100 lb
------------------	-----------	-----------

- Long undercarriage, Reach boom, R3.2 m (10'6") stick, HD 1.60 m<sup>3</sup> (2.09 yd<sup>3</sup>) bucket, 600 mm (24") triple grouser shoes and 6700 kg (14,770 lb) counterweight.

### Track

Standard Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Number of Shoes (each side)	50	
Number of Track Rollers (each side)	9	
Number of Carrier Rollers (each side)	2	

### Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	5.3 km/h	3.3 mph
Maximum Drawbar Pull	248 kN	55,753 lbf

### Hydraulic System

Main System – Maximum Flow – Implement	560 L/min (280 × 2 pumps)	148 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment	35 000 kPa	5,075 psi
Maximum Pressure – Travel	35 000 kPa	5,075 psi
Maximum Pressure – Swing	28 400 kPa	4,120 psi
Boom Cylinder – Bore	140 mm	6 in
Boom Cylinder – Stroke	1407 mm	55 in
Stick Cylinder – Bore	150 mm	6 in
Stick Cylinder – Stroke	1646 mm	65 in
Bucket Cylinder – Bore	135 mm	5 in
Bucket Cylinder – Stroke	1156 mm	46 in



# 330 GC Hydraulic Excavator Specifications

## Service Refill Capacities

Fuel Tank Capacity	474 L	125.2 gal
Cooling System	25 L	6.6 gal
Engine Oil	25 L	6.6 gal
Swing Drive	10 L	2.6 gal
Final Drive (each)	5.5 L	1.5 gal
Hydraulic System (including tank)	310 L	81.9 gal
Hydraulic Tank	147 L	38.8 gal

## Standards

Brakes	ISO 10265:2008
Cab/FOGS	ISO 10262:1998
Cab/ROPS	ISO 12117-2:2008

## Sound Performance

ISO 6395:2008 (external)	103 dB(A)
ISO 6396:2008 (inside cab)	70 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

## Operating Weights and Ground Pressures

	600 mm (24") Triple Grouser Shoes		700 mm (28") HD Triple Grouser Shoes	
	Weight	Ground Pressure	Weight	Ground Pressure
	kg (lb)	kPa (psi)	kg (lb)	kPa (psi)
<b>Base Machine with 6700 kg (14,770 lb) Counterweight and Long Undercarriage</b>				
Reach Boom + R3.2CB2 (10'6") Stick + 1.60 m <sup>3</sup> (2.00 yd <sup>3</sup> ) HD Bucket	29 600 (65,100)	56 (8.2)	30 200 (66,400)	49 (7.1)
Reach Boom + R2.65CB2 (10'6") Stick + 1.60 m <sup>3</sup> (2.00 yd <sup>3</sup> ) HD Bucket	29 500 (64,900)	56 (8.1)	30 100 (66,200)	49 (7.1)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

# 330 GC Hydraulic Excavator Specifications


## Major Component Weights

	kg	lb
Base machine (6700 kg [14,770 lb] counterweight, upper frame, long undercarriage with HD rollers), with boom cylinders and weight of 90% fuel tank and 75 kg (165 lb) operator included.	20 900	46,000
Track Shoes:		
600 mm (24") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	3620	7,980
700 mm (28") Width, 13 mm (0.51") Thick, HD Triple Grouser Track Shoes	4200	9,260
Two Boom Cylinders	490	1,080
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	460	1,010
Counterweight:		
6700 kg (14,770 lb) Counterweight	6700	14,770
Undercarriage:		
Long Undercarriage with HD Rollers	6700	14,800
Boom (including lines, pins, stick cylinder):		
Reach Boom 6.15 m (20'2")	2300	5,070
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R3.2CB2 (10'6")	1440	3,170
Reach Stick R2.65CB2 (8'8")	1350	2,980
Buckets (without linkage, with tips and side cutters):		
1.60 m <sup>3</sup> (2.09 yd <sup>3</sup> ) HD, CB Linkage	1320	2,910
1.76 m <sup>3</sup> (2.30 yd <sup>3</sup> ) GD, CB Linkage	1130	2,490
1.80 m <sup>3</sup> (2.36 yd <sup>3</sup> ) HD, CB Linkage	1410	3,110
Quick Couplers:		
Pin Grabber QC CB with Pins	530	1,170
Pin Grabber QC CB without Pins	500	1,100
Dedicated QC	430	950

# 330 GC Hydraulic Excavator Specifications

## Dimensions

All dimensions are approximate and may vary depending on bucket selection.

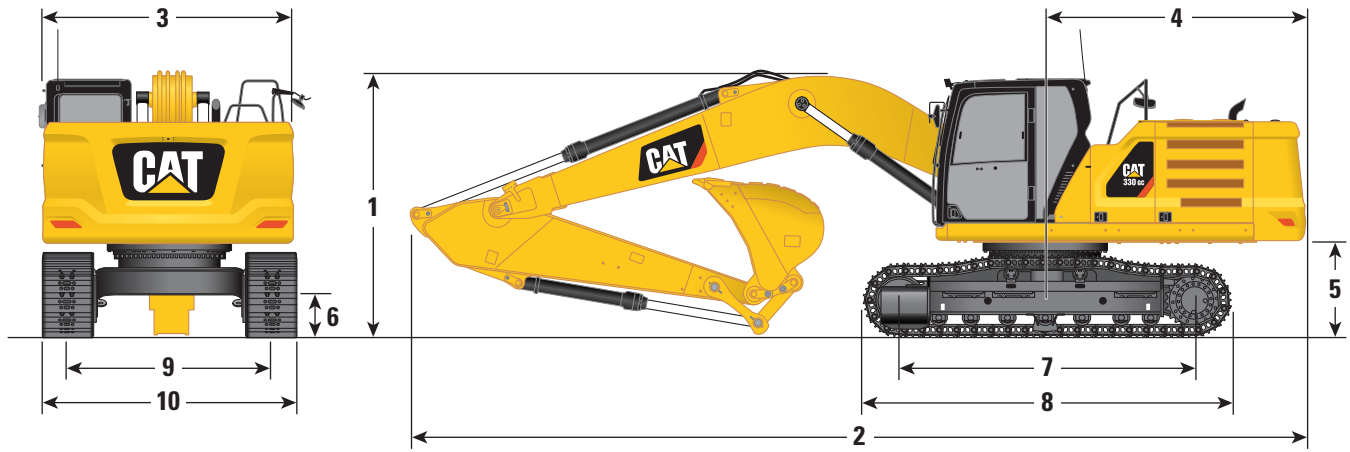


Boom Option	Reach Boom 6.15 m (20'2")			
Stick Options	Reach Stick R3.2CB2 (10'6")		Reach Stick R2.65CB2 (8'8")	
<b>1</b> Machine Height:				
Cab Height	3050 mm	10'0"	3050 mm	10'0"
FOGS Height	3190 mm	10'6"	3190 mm	10'6"
Handrails Height	3050 mm	10'0"	3050 mm	10'0"
With Boom/Stick/Bucket Installed	3400 mm	11'2"	3450 mm	11'4"
With Boom/Stick Installed	3380 mm	11'1"	3380 mm	11'1"
With Boom Installed	3050 mm	10'0"	3050 mm	10'0"
<b>2</b> Machine Length:				
With Boom/Stick/Bucket Installed	10 420 mm	34'2"	10 420 mm	34'2"
With Boom/Stick Installed	10 420 mm	34'2"	10 420 mm	34'2"
With Boom Installed	9230 mm	30'3"	9230 mm	30'3"
<b>3</b> Upperframe Width without Walkways	2940 mm	9'8"	2940 mm	9'8"
<b>4</b> Tail Swing Radius	3130 mm	10'3"	3130 mm	10'3"
<b>5</b> Counterweight Clearance	1110 mm	3'8"	1110 mm	3'8"
<b>6</b> Ground Clearance	490 mm	1'7"	490 mm	1'7"
<b>7</b> Length to Center of Rollers	3990 mm	13'1"	3990 mm	13'1"
<b>8</b> Track Length	4860 mm	15'11"	4860 mm	15'11"
<b>9</b> Track Gauge – Extended	2590 mm	8'6"	2590 mm	8'6"
Track Width:				
600 mm (24") Shoes	600 mm	24"	600 mm	24"
700 mm (28") Shoes	700 mm	28"	700 mm	28"
<b>10</b> Undercarriage Width (with steps/without steps):				
600 mm (24") Shoes	3190 mm	10'6"	3190 mm	10'6"
700 mm (28") Shoes	3290 mm	10'10"	3290 mm	10'10"
Bucket Type	HD		HD	
Bucket Capacity	1.60 m <sup>3</sup>	2.09 yd <sup>3</sup>	1.60 m <sup>3</sup>	2.09 yd <sup>3</sup>
Bucket Tip Radius	1662 mm	5'5"	1662 mm	5'5"

# 330 GC Hydraulic Excavator Specifications

## Working Ranges and Forces




All dimensions are approximate and may vary depending on bucket selection.

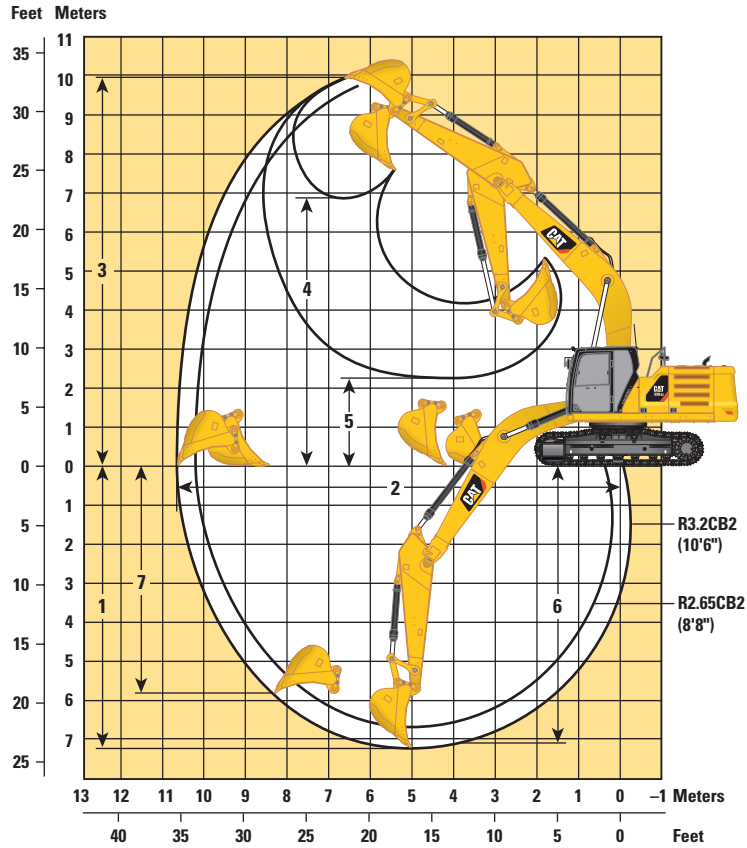

Boom Option	Reach Boom 6.15 m (20'2")			
Stick Options	Reach Stick R3.2CB2 (10'6")		Reach Stick R2.65CB2 (8'8")	
1 Maximum Digging Depth	7260 mm	23'10"	6710 mm	22'0"
2 Maximum Reach at Ground Line	10 690 mm	35'1"	10 210 mm	33'6"
3 Maximum Cutting Height	9980 mm	32'9"	9880 mm	32'5"
4 Maximum Loading Height	6930 mm	22'9"	6790 mm	22'3"
5 Minimum Loading Height	2280 mm	7'6"	2830 mm	9'3"
6 Maximum Depth Cut for 2440 mm (8 ft) Level Bottom	7100 mm	23'4"	6530 mm	21'5"
7 Maximum Vertical Wall Digging Depth	5800 mm	19'0"	5510 mm	18'1"
Bucket Digging Force (SAE)	157 kN	35,290 lbf	157 kN	35,290 lbf
Bucket Digging Force (ISO)	179 kN	40,240 lbf	179 kN	40,240 lbf
Stick Digging Force (SAE)	123 kN	27,650 lbf	140 kN	31,470 lbf
Stick Digging Force (ISO)	126 kN	28,330 lbf	145 kN	32,600 lbf
Bucket Type	HD		HD	
Bucket Capacity	1.60 m <sup>3</sup>	2.09 yd <sup>3</sup>	1.60 m <sup>3</sup>	2.09 yd <sup>3</sup>
Bucket Tip Radius	1662 mm	5'5"	1662 mm	5'5"




# 330 GC Hydraulic Excavator Specifications

## Reach Boom Lift Capacities – Counterweight: 6700 kg (14,770 lb) – without Bucket



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
7500 mm 300 in	kg lb													*5150 *11,350	*5150 *11,350	7270 290
6000 mm 240 in	kg lb								*7200 *15,300	6200 13,300				*4900 *10,750	*4900 *10,750	8230 330
4500 mm 180 in	kg lb							*8400 *18,250	*8400 *18,250	*7600 *16,600	6050 13,050			*4850 *10,650	4700 10,400	8830 350
3000 mm 120 in	kg lb					*12 950 *27,850	12 350 26,650	*9800 *21,250	8100 17,500	*8300 *18,050	5900 12,650	*5950 4500		*5000 *10,950	4400 9,650	9140 360
1500 mm 60 in	kg lb					*15 450 *33,350	11 650 25,150	*11 150 *24,150	7800 16,750	8800 18,950	5700 12,300	6750 *12,550	4400 9,450	*5300 *11,650	4300 9,400	9190 370
0 mm 0 in	kg lb					*16 600 *35,950	11 300 24,350	*12 050 *26,000	7550 16,250	8650 18,650	5550 12,000			*5850 *12,800	4350 9,550	8990 360
-1500 mm -60 in	kg lb	*6350 *14,200	*6350 *14,200	*10 000 *22,700	*10 000 *22,700	*16 600 *35,950	11 250 24,150	12 000 25,750	7450 16,000	8600 18,500	5500 11,850			*6750 *14,850	4650 10,250	8530 340
-3000 mm -120 in	kg lb	*11 450 *25,650	*11 450 *25,650	*16 150 *36,750	*16 150 *36,750	*15 600 *33,700	11 300 24,300	*11 700 *25,300	7450 16,050	8650 18,600	5550 11,950			8300 18,350	5350 11,800	7740 310
-4500 mm -180 in	kg lb			*18 050 *38,850	*18 050 *38,850	*13 250 *28,450	11 500 24,800	*9800 *20,750	7600 16,450					*8600 *18,900	6850 15,300	6520 260

## Reach Boom Lift Capacities – Counterweight: 6700 kg (14,770 lb) – without Bucket



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
7500 mm 300 in	kg lb													*5150 *11,350	*5150 *11,350	7270 290
6000 mm 240 in	kg lb								*7200 *15,300	6300 13,500				*4900 *10,750	*4900 *10,750	8230 330
4500 mm 180 in	kg lb							*8400 *18,250	*8400 *18,250	*7600 *16,600	6150 13,250			*4850 *10,650	4800 10,550	8830 350
3000 mm 120 in	kg lb					*12 950 *27,850	12 550 27,050	*9800 *21,250	8250 17,800	*8300 *18,050	6000 12,900	*5950 4550		*5000 *10,950	4450 9,800	9140 360
1500 mm 60 in	kg lb					*15 450 *33,350	11 850 25,550	*11 150 *24,150	7900 17,050	8950 19,300	5800 12,500	*6800 *12,550	4500 9,650	*5300 *11,650	4350 9,550	9190 370
0 mm 0 in	kg lb					*16 600 *35,950	11 500 24,800	*12 050 *26,050	7650 16,500	8800 18,950	5650 12,200			*5850 *12,800	4450 9,750	8990 360
-1500 mm -60 in	kg lb	*6350 *14,200	*6350 *14,200	*10 000 *22,700	*10 000 *22,700	*16 600 *35,950	11 400 24,550	12 200 26,200	7550 16,300	8750 18,800	5600 12,050			*6750 *14,850	4750 10,450	8530 340
-3000 mm -120 in	kg lb	*11 450 *25,650	*11 450 *25,650	*16 150 *36,750	*16 150 *36,750	*15 600 *33,700	11 500 24,700	*11 700 *25,300	7600 16,300	8800 18,950	5650 12,150			8400 18,650	5400 12,000	7740 310
-4500 mm -180 in	kg lb			*18 050 *38,850	*18 050 *38,850	*13 250 *28,450	11 700 25,200	*9800 *20,750	7750 16,750					*8600 *18,900	6950 15,550	6520 260



ISO 10567






\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.












Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.



# 330 GC Hydraulic Excavator Specifications












## Reach Boom Lift Capacities – Counterweight: 6700 kg (14,770 lb) – without Bucket



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					<b>*17,450</b>	<b>*17,450</b>			<b>*6700</b> <b>*14,900</b>	<b>*6700</b> <b>*14,900</b>	6670 260
6000 mm 240 in	kg lb					<b>*8150</b> <b>*17,750</b>	<b>*8150</b> <b>*17,750</b>	<b>*7650</b> <b>*14,350</b>	<b>6100</b> <b>13,100</b>	<b>*6300</b> <b>*13,950</b>	<b>5850</b> <b>13,000</b>	7700 300
4500 mm 180 in	kg lb			<b>*11 200</b> <b>*24,000</b>	<b>*11 200</b> <b>*24,000</b>	<b>*9100</b> <b>*19,750</b>	<b>8400</b> <b>18,100</b>	<b>*8150</b> <b>*17,800</b>	<b>6050</b> <b>12,950</b>	<b>*6250</b> <b>*13,750</b>	<b>5100</b> <b>11,300</b>	8340 330
3000 mm 120 in	kg lb			<b>*14 100</b> <b>*30,300</b>	<b>12 150</b> <b>26,200</b>	<b>*10 450</b> <b>*22,600</b>	<b>8050</b> <b>17,350</b>	<b>*8750</b> <b>*19,050</b>	<b>5850</b> <b>12,650</b>	<b>*6400</b> <b>*14,050</b>	<b>4750</b> <b>10,450</b>	8660 340
1500 mm 60 in	kg lb			<b>*15 600</b> <b>*35,000</b>	<b>11 550</b> <b>24,900</b>	<b>*11 650</b> <b>*25,150</b>	<b>7750</b> <b>16,700</b>	<b>8800</b> <b>18,950</b>	<b>5700</b> <b>12,300</b>	<b>*6800</b> <b>*14,900</b>	<b>4650</b> <b>10,200</b>	8720 350
0 mm 0 in	kg lb			<b>*16 550</b> <b>*36,450</b>	<b>11 350</b> <b>24,400</b>	<b>12 100</b> <b>26,050</b>	<b>7550</b> <b>16,300</b>	<b>8700</b> <b>18,700</b>	<b>5600</b> <b>12,050</b>	<b>7250</b> <b>16,000</b>	<b>4750</b> <b>10,400</b>	8510 340
-1500 mm -60 in	kg lb	<b>*9750</b> <b>*22,250</b>	<b>*9750</b> <b>*22,250</b>	<b>*16 350</b> <b>*35,500</b>	<b>11 350</b> <b>24,350</b>	<b>12 050</b> <b>25,900</b>	<b>7500</b> <b>16,150</b>	<b>8650</b> <b>18,650</b>	<b>5550</b> <b>12,000</b>	<b>7900</b> <b>17,450</b>	<b>5150</b> <b>11,300</b>	8020 320
-3000 mm -120 in	kg lb	<b>*18 300</b> <b>*41,700</b>	<b>*18 300</b> <b>*41,700</b>	<b>*14 950</b> <b>*32,300</b>	<b>11 450</b> <b>24,600</b>	<b>*11 350</b> <b>*24,400</b>	<b>7550</b> <b>16,300</b>			<b>*8900</b> <b>*19,600</b>	<b>6000</b> <b>13,300</b>	7180 290
-4500 mm -180 in	kg lb	<b>*15 700</b>	<b>*15 700</b>	<b>*11 900</b> <b>*25,400</b>	<b>11 750</b> <b>25,250</b>					<b>*8650</b> <b>*19,000</b>	<b>8150</b> <b>18,300</b>	5830 230

## Reach Boom Lift Capacities – Counterweight: 6700 kg (14,770 lb) – without Bucket



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb					<b>*17,450</b>	<b>*17,450</b>			<b>*6700</b> <b>*14,900</b>	<b>*6700</b> <b>*14,900</b>	6670 260
6000 mm 240 in	kg lb					<b>*8150</b> <b>*17,750</b>	<b>*8150</b> <b>*17,750</b>	<b>*7650</b> <b>*14,350</b>	<b>6200</b> <b>13,300</b>	<b>*6300</b> <b>*13,950</b>	<b>5950</b> <b>13,250</b>	7700 300
4500 mm 180 in	kg lb			<b>*11 200</b> <b>*24,000</b>	<b>*11 200</b> <b>*24,000</b>	<b>*9100</b> <b>*19,750</b>	<b>8550</b> <b>18,400</b>	<b>*8150</b> <b>*17,800</b>	<b>6100</b> <b>13,150</b>	<b>*6250</b> <b>*13,750</b>	<b>5200</b> <b>11,500</b>	8340 330
3000 mm 120 in	kg lb			<b>*14 100</b> <b>*30,300</b>	<b>12 350</b> <b>26,600</b>	<b>*10 450</b> <b>*22,600</b>	<b>8200</b> <b>17,650</b>	<b>*8750</b> <b>*19,050</b>	<b>5950</b> <b>12,850</b>	<b>*6400</b> <b>*14,050</b>	<b>4850</b> <b>10,650</b>	8660 340
1500 mm 60 in	kg lb			<b>*15 600</b> <b>*35,000</b>	<b>11 750</b> <b>25,350</b>	<b>*11 650</b> <b>*25,150</b>	<b>7900</b> <b>17,000</b>	<b>8950</b> <b>19,300</b>	<b>5800</b> <b>12,500</b>	<b>*6800</b> <b>*14,900</b>	<b>4700</b> <b>10,350</b>	8720 350
0 mm 0 in	kg lb			<b>*16 550</b> <b>*36,450</b>	<b>11 550</b> <b>24,850</b>	<b>*12 300</b> <b>26,500</b>	<b>7700</b> <b>16,550</b>	<b>8850</b> <b>19,050</b>	<b>5700</b> <b>12,250</b>	<b>7400</b> <b>16,300</b>	<b>4800</b> <b>10,600</b>	8510 340
-1500 mm -60 in	kg lb	<b>*9750</b> <b>*22,250</b>	<b>*9750</b> <b>*22,250</b>	<b>*16 350</b> <b>*35,500</b>	<b>11 500</b> <b>24,800</b>	<b>12 250</b> <b>26,350</b>	<b>7650</b> <b>16,450</b>	<b>8800</b> <b>19,000</b>	<b>5650</b> <b>12,200</b>	<b>8050</b> <b>17,750</b>	<b>5200</b> <b>11,500</b>	8020 320
-3000 mm -120 in	kg lb	<b>*18 300</b> <b>*41,700</b>	<b>*18 300</b> <b>*41,700</b>	<b>*14 950</b> <b>*32,300</b>	<b>11 650</b> <b>25,050</b>	<b>*11 350</b> <b>*24,400</b>	<b>7700</b> <b>16,600</b>			<b>*8900</b> <b>*19,600</b>	<b>6100</b> <b>13,500</b>	7180 290
-4500 mm -180 in	kg lb	<b>*15 700</b>	<b>*15 700</b>	<b>*11 900</b> <b>*25,400</b>	<b>*11 900</b> <b>*25,400</b>					<b>*8650</b> <b>*19,000</b>	<b>8250</b> <b>18,600</b>	5830 230



ISO 10567



\* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# 330 GC Hydraulic Excavator Specifications

## Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill %	6.7 mt (14,770 lb) Counterweight	
		mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb		Reach Boom	Reach Boom
									R3.2 (10'6")	R2.65 (8'8")
<b>Pin-On (No Quick Coupler)</b>										
General Duty (GD) – UK/ANZ	CB	600	24	0.52	0.68	659	1,454	100	●	●
	CB	750	30	0.71	0.93	726	1,601	100	●	●
	CB	1000	40	1.03	1.35	835	1,841	100	●	●
	CB	1350	54	1.54	2.02	1005	2,216	100	●	●
	CB	1500	60	1.76	2.30	1069	2,357	100	●	●
	CB	1600	63	1.86	2.43	1099	2,423	100	X	X
Heavy Duty (HD) – ANZ	CB	1200	48	1.33	1.74	1096	2,417	100	●	●
	CB	1350	54	1.54	2.02	1196	2,637	100	●	●
Heavy Duty (HD) – CCL	CB	1450	57	1.60	2.09	1274	2,809	100	●	●
	CB	1600	63	1.80	2.36	1348	2,973	100	X	X
Heavy Duty (HD)	CB	1500	60	1.76	2.30	1391	3,067	100	⊙	●
Maximum load with pin-on (payload + bucket)								kg	4675	5115
								lb	10,307	11,277
<b>With Pin Grabber Quick Coupler</b>										
General Duty (GD) – UK/ANZ	CB	600	24	0.52	0.68	659	1,454	100	●	●
	CB	750	30	0.71	0.93	726	1,601	100	●	●
	CB	1000	40	1.03	1.35	835	1,841	100	●	●
	CB	1350	54	1.54	2.02	1005	2,216	100	●	●
	CB	1500	60	1.76	2.30	1069	2,357	100	⊙	●
	CB	1600	63	1.86	2.43	1099	2,423	100	⊖	⊙
Heavy Duty (HD) – ANZ	CB	1200	48	1.33	1.74	1096	2,417	100	●	●
	CB	1350	54	1.54	2.02	1196	2,637	100	⊙	●
Heavy Duty (HD) – CCL	CB	1450	57	1.60	2.09	1274	2,809	100	⊙	●
	CB	1600	63	1.80	2.36	1348	2,973	100	⊖	⊙
Heavy Duty (HD)	CB	1500	60	1.76	2.30	1391	3,067	100	⊖	⊙
Maximum load with coupler (payload + bucket)								kg	4149	4589
								lb	9,146	10,116

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

### Maximum Material Density:

● 2100 kg/m<sup>3</sup> (3,500 lb/yd<sup>3</sup>)

⊙ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)

⊖ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.



# 330 GC Hydraulic Excavator Specifications

## Attachments Offering Guide

### PIN-ON ATTACHMENTS

Counterweight		6.7 mt (14,770 lb)	
Boom Type		Reach Boom	Reach Boom
Stick Length		2.65 m (8'8")	3.20 m (10'6")
Hydraulic Hammers	H120Es	✓	✓
	H130Es	✓	✓
	H140Es	✓	✓
	B30	✓	✓
	B35	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3035	✓	✓
Rippers		✓	✓
Cat Pin Grabber Couplers		✓	✓

### CAT PIN GRABBER COUPLER ATTACHMENTS

Counterweight		6.7 mt (14,770 lb)	
Boom Type		Reach Boom	Reach Boom
Stick Length		2.65 m (8'8")	3.20 m (10'6")
Hydraulic Hammers	H120Es	✓	✓
	H130Es	✓	✓
	H140Es	✓	✓
	B30	✓	✓
	B35	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓	✓
	S3035	✓	✓
Rippers		✓	✓

### BOOM-MOUNT ATTACHMENTS

Counterweight		6.7 mt (14,770 lb)	
Boom Type		Reach Boom	
Mobile Scrap and Demolition Shears	S2070	✓	
	S3050	✓	

# 330 GC Standard and Optional Equipment

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>CAB</b>			<b>ENGINE</b>		
ROPS, standard sound suppression	✓		Two selectable modes: Power, Smart	✓	
Mechanically adjustable seat suspension	✓		One-touch low idle with automatic engine speed control	✓	
Height-adjustable console, three steps with tool	✓		Auto engine idle-shutdown	✓	
High-resolution 203 mm (8") LCD touchscreen monitor	✓		4500 m (14,760 ft) altitude capability with engine power derate above 3000 m (9,840 ft)	✓	
Automatic bi-level air conditioner	✓		52° C (125° F) high-ambient cooling capability without derate	✓	
Jog dial and shortcut keys for monitor control	✓		-18° C (0° F) cold start capability	✓	
Keyless push-to-start engine control	✓		2 × 115 amp dual alternator	✓	
51 mm (2") seat belt	✓		Sealed double element air filter with integrated precleaner	✓	
Bluetooth® integrated radio with USB ports	✓		Two-stage fuel filtration with water separator and indicator	✓	
12V DC outlets (×2)	✓		Electric Fuel Priming Pump	✓	
Document storage	✓		On-demand electric cooling fans with auto-reverse function	✓	
Cup and bottle holders	✓		Biodiesel capability up to B20	✓	
Openable two-piece front window	✓		<b>HYDRAULIC SYSTEM</b>		
Upper radial wiper with washer	✓		Electronic main control valve	✓	
Openable steel skylight hatch	✓		Electric boom regeneration circuit	✓	
LED dome and lower interior lights	✓		Stick regeneration circuit	✓	
Roller front sunscreen	✓		Automatic hydraulic oil warm up	✓	
Roller rear sunscreen		✓	Automatic two-speed travel	✓	
Rear window emergency exit	✓		Boom and stick drift reduction valve	✓	
Washable floor mat	✓		Boom lowering check valve	✓	
Beacon ready	✓		Stick lowering check valve	✓	
<b>CAT CONNECT TECHNOLOGY</b>			High performance hydraulic return filter	✓	
Cat Product Link™	✓		Final drive with bio hydraulic oil capable travel motor	✓	
			Fine swing control	✓	
			Hammer return filter circuit		✓
			Tool Control (two pump, one/two way high-pressure flow)		✓
			Common Quick Coupler Circuit for Cat Pin Grabber and CW Dedicated		✓
			Electronic Pattern Changer (requires activation)	✓	

(continued on next page)

## Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
<b>BOOM, STICKS AND LINKAGES</b>			<b>SERVICE AND MAINTENANCE</b>		
6.15 m (20'2") Reach boom	✓		Grouped location of engine oil and fuel filters	✓	
3.2 m (10'6") Reach stick, CB2 Linkage		✓	Ground level second dipstick for engine oil	✓	
2.65 m (8'8") Reach stick, CB2 Linkage		✓	Side entry to service platform	✓	
Bucket Linkage	✓		Scheduled Oil Sampling (S·O·S <sup>SM</sup> ) ports	✓	
<b>UNDERCARRIAGE AND STRUCTURES</b>			Preventative maintenance ready (QuickEvac <sup>TM</sup> )		✓
Track guiding guard, segmented three piece	✓		Radiator screen		✓
Bottom guard	✓		<b>SAFETY AND SECURITY</b>		
Travel motor guard	✓		Rearview camera	✓	
Grease lubricated track	✓		Right-side-view camera	✓	
Base frame with HD rollers	✓		Secure start with PIN code	✓	
Tie-down points on base frame	✓		Caterpillar One Key security system	✓	
6700 kg (14,770 lb) counterweight	✓		Lockable external tool/storage box	✓	
600 mm (24") triple grouser track shoes		✓	Lockable door, fuel, and hydraulic tank locks	✓	
700 mm (28") HD triple grouser track shoes		✓	Lockable fuel drain compartment	✓	
<b>ELECTRICAL SYSTEM</b>			Service platform with anti-skid plate and recessed bolts	✓	
2 × Machine Electronic Control Module	✓		RH handrail and hand hold (ISO 2867:2011 compliant)	✓	
Maintenance-free 1,000 CCA batteries (×2)	✓		Cab mirror for RH track edge	✓	
After engine shutdown, programmable time delay LED working lights: one chassis mounted, one LH boom mounted	✓		Signaling/warning horn	✓	
Centralized electrical disconnect switch	✓		Ground-level secondary engine shutoff switch in cab	✓	
LED chassis light, LH boom light	✓		Hydraulic lock out lever that neutralizes all controls	✓	
LED cab light, RH boom light		✓	Travel alarm		✓
Compatible with Electronic Technician	✓				

# 330 GC Attachments

## Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

### CAB

- RH electrical pedal (two-way) for tool control
- Radial lower wiper for two piece (70/30) windshield, with washer
- Rain protector plus cab light cover
- Polycarbonate roof hatch

### SAFETY AND SECURITY

- Seat belt, retractable (75 mm/3 in width)
- Bluetooth receiver

### GUARDS

- STD swivel guard
- HD swivel guard
- Side rubber bumper guard
- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)
- Full protecting vandalism guard (not compatible with cab light cover, rain protector)

### ELECTRICAL

- Jump start wiring

### HYDRAULIC

- Tool Control (two pump, one/two way high-pressure flow)
- Common Quick Coupler Circuit for Cat Pin Grabber and CW Dedicated

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2018 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXJ0086 (11-2018)  
Build Number: 07A  
(ANZ)

