

Cat[®] Prime Application Grease

For medium-load, medium-speed applications

NLGI Grade 2



Discover the Difference

Factory-Fill—Used as standard factory-fill for most Cat machines.

Long Life—Lithium complex grease, enhanced with 3% molybdenum disulfide (moly), in medium-load, medium-speed and moderate temperature applications in a low moisture environments.


Reduced Component Wear—Resists softening and protects parts from wear.

Corrosion Protection—Resists oxidation and protects metal against rust. Will not corrode or damage steel, copper bearing alloys or conventional seal material.



Cat® Prime Application Grease

Grease Selection Guide

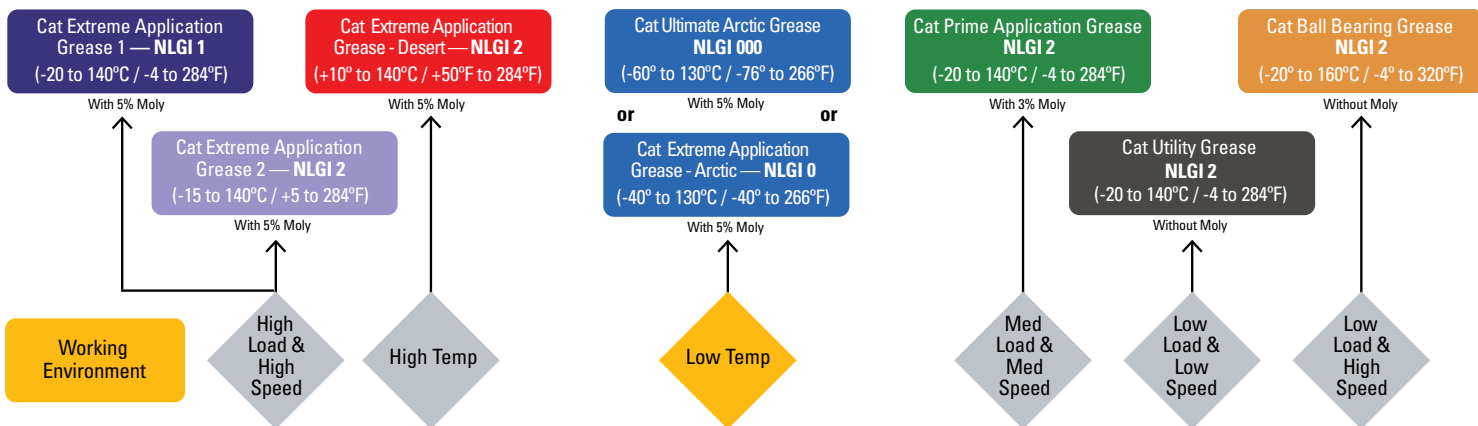

* All temperatures are Operating Temperatures

Typical Properties	
NLGI	2
Color	Gray Black
Molybdenum Disulfide, %	3
Operating Temperature Range, °C	-20 to +140
Operating Temperature Range, °F	-4 to +284
Base Oil Type	Mineral
ASTM D445 Base Oil Viscosity 40°C, mm²/s	320
Thickener Type	Lithium Complex
ASTM D2265 Dropping point, °C	260
ASTM D217 Penetration, worked 60, mm/10	280
ASTM D1831 Roll stability, penetration change, mm/10	-3
ASTM D2266 4 Ball wear, scar diameter, mm	0.47
ASTM D2596 4 Ball weld load, kg	400
ASTM D1743 Rust prevention	Pass
ASTM D4048 Copper corrosion	1A
ASTM D1264 Water wash-out, 79°C, mass %	6

The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

Recommended Use

Cat Prime Application Grease is recommended for grease fittings and lubrication points in medium-load, medium-speed applications where operating temperatures range from -20°C to +140 °C (-4°F to +284 °F).

Health and Safety

Always read and understand the Safety Data Sheet (SDS) before using this product.

For a copy of the SDS, visit us on the web at: www.catmsds.com

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your fleet up and running to maximize your equipment investment.

LET'S DO THE WORK.™



PEHJ0404-01
www.cat.com

© 2022 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

