

---

# Diesel Generator Set



Image shown may not reflect actual package

## Continuous 2050 kW 2563 kVA 60 Hz 1800 rpm 4160 Volts

Caterpillar is leading the power generation Market place with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

---

### FUEL/EMISSIONS STRATEGY

- EPA Tier 4 Interim

### DESIGN CRITERIA

- The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response.

### FULL RANGE OF ATTACHMENTS

- Wide range of bolt-on system expansion attachments, factory designed and tested
- Flexible packaging options for easy and cost effective installation

### SINGLE-SOURCE SUPPLIER

- Fully prototype tested with certified torsional vibration analysis available

### WORLDWIDE PRODUCT SUPPORT

- Cat<sup>®</sup> dealers provide extensive post sale support including maintenance and repair agreements
- Cat dealers have over 1,800 dealer branch stores operating in 200 countries.
- The Cat<sup>®</sup> SOS<sup>SM</sup> program effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by products.

### CAT 3516C-HD ATAAC DIESEL ENGINE

- Reliable, rugged, durable design
- Field proven in thousands of applications worldwide
- Four-stroke diesel engine combines consistent performance and excellent fuel economy with minimum weight
- Engine performance optimized for use with Cat clean emissions module (CEM)

### CAT CLEAN EMISSIONS MODULE (CEM)

- Diesel oxidation catalyst for particulate matter (PM) and hydrocarbon (HC) control
- Selective catalytic reduction (SCR) with integrated sound attenuation
- Integrated electronics for monitoring, protection, and closed loop NO<sub>x</sub> control
- Reliable, compact, and lightweight system gives maximum installation flexibility

### CAT GENERATOR

- Matched to the performance and output characteristics of Caterpillar engines
- Single point access to accessory connections
- UL 1446 Recognized Class H insulation

### CAT EMCP 4 CONTROL PANELS

- Simple user friendly interface and navigation
- Scalable system to meet a wide range of customer needs
- Integrated Control System and Communications Gateway

# CONTINUOUS 2050 kW 2563 kVA

60 Hz 1800 rpm 4160 Volts



## Factory Installed Standard & Optional Equipment

System	Standard	Optional
Air Inlet	<ul style="list-style-type: none"> <li>• Single element canister type air cleaner with service indicator</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Dual element air cleaners</li> <li><input type="checkbox"/> Air inlet adapters &amp; shutoff</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>• Radiator with guard</li> <li>• Fan and belt guards</li> <li>• Coolant drain line with valve</li> <li>• Coolant level sensors*</li> <li>• Cat Extended Life Coolant*</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Jacket water heater</li> <li><input type="checkbox"/> Radiator duct flange</li> <li><input type="checkbox"/> Radiator option</li> </ul>
Exhaust	<ul style="list-style-type: none"> <li>• Exhaust manifold - dry - dual</li> <li>• 254 mm (10 in) ID round flanged engine outlets</li> <li>• Clean Emissions Module (CEM)</li> <li>• CEM control cabinet</li> <li>• Flanged outlet</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Mufflers</li> <li><input type="checkbox"/> Stainless steel exhaust flex fittings</li> <li><input type="checkbox"/> Elbows, flanges, expanders, &amp; Y adapters</li> <li><input type="checkbox"/> CEM installation package including support, exhaust connection kit, harness, and heated urea lines.</li> </ul>
Fuel	<ul style="list-style-type: none"> <li>• Secondary fuel filters</li> <li>• Fuel cooler*</li> <li>• Fuel priming pump</li> <li>• Flexible fuel lines-shipped loose</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Duplex secondary fuel filter</li> <li><input type="checkbox"/> Primary fuel filter with fuel waters separator</li> </ul>
Generator	<ul style="list-style-type: none"> <li>• 3 Phase brushless, Salient pole</li> <li>• Class H insulation</li> <li>• Cat digital voltage regulator (CDVR) with VAR/PF control, 3-phase sensing</li> <li>• Winding temperature detectors</li> <li>• Anti-condensation space heaters</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Oversize generators</li> </ul>
Power Termination	<ul style="list-style-type: none"> <li>• Bus bar (NEMA mechanical lug holes)</li> <li>• Right hand bottom cable entry</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Left and/or rear power termination</li> </ul>
Governor	<ul style="list-style-type: none"> <li>• ADEM™ A4</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Load share module</li> </ul>
Control Panel	<ul style="list-style-type: none"> <li>• User interface panel (UIP) - rear mount</li> <li>• EMCP 4.2 Genset Controller</li> <li>• AC &amp; DC customer wiring area (right side)</li> <li>• Emergency Stop Pushbutton</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Local &amp; remote annunciator modules</li> <li><input type="checkbox"/> Digital I/O Module</li> <li><input type="checkbox"/> Generator temperature monitoring &amp; protection</li> </ul>
Lube	<ul style="list-style-type: none"> <li>• Lubricating oil</li> <li>• Gear type lube oil pump</li> <li>• Integral lube oil cooler</li> <li>• Oil filter, filler and dipstick</li> <li>• Oil drain line and valve</li> <li>• Closed crankcase ventilation (CCV) system</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Oil level regulator</li> <li><input type="checkbox"/> Deep sump oil pan</li> <li><input type="checkbox"/> Electric &amp; air prelube pumps</li> <li><input type="checkbox"/> Manual prelube with sump pump</li> <li><input type="checkbox"/> Duplex oil filter</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>• Rails - engine / generator / radiator mounting</li> <li>• Rubber anti-vibration mounts (shipped loose)</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Spring type vibration isolator</li> </ul>
Starting / Charging	<ul style="list-style-type: none"> <li>• 24 volt starting motor(s)</li> <li>• Batteries with rack and cables</li> <li>• Battery disconnect switch</li> <li>• 60A charging alternator</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> Battery chargers (10, 20, &amp; 50 Amp)</li> <li><input type="checkbox"/> Oversize batteries</li> <li><input type="checkbox"/> Ether starting aids</li> <li><input type="checkbox"/> Heavy duty starting motors</li> <li><input type="checkbox"/> Barring device (manual)</li> <li><input type="checkbox"/> Air starting motor with control &amp; silencer</li> </ul>
General	<ul style="list-style-type: none"> <li>• Right hand service</li> <li>• Paint – Cat yellow except rails and radiators gloss black</li> <li>• SAE standard rotation</li> <li>• Flywheel and flywheel housing – SAE No. 00</li> </ul>	

\*Not included with packages without radiators



**SPECIFICATIONS**

**CAT GENERATOR**

Frame .....	1846
Excitation .....	Permanent Magnet
Pitch.....	0.6667
Number of poles.....	4
Number of leads.....	6
Number of bearings .....	Two Bearing
Insulation .....	Class H
IP rating .....	Drip proof IP23
Over speed capability - % of rated.....	125%
Wave form deviation.....	3 %
Voltage regulator.....	3 phase sensing with load adjustable module
Voltage regulation....	Less than $\pm 1/2\%$ (steady state) Less than $\pm 1/2\%$ (3% speed change)
Telephone Influence Factor .....	Less than 50
Harmonic Distortion .....	Less than 5%

**CAT DIESEL ENGINE**

3516C-HD ATAAC, V-16, 4 stroke, water-cooled diesel

Bore .....	170.00 mm (6.69 in)
Stroke .....	215.00 mm (8.64in)
Displacement .....	78.08 L (4764.73 in <sup>3</sup> )
Compression ratio.....	14.0:1
Aspiration.....	TA
Fuel system.....	Electronic unit injection
Governor Type.....	ADEM™ A4

**CAT EMCP 4 CONTROL PANELS**

EMCP 4 controls including:

- Run / Auto / Stop Control
- Speed & Voltage Adjust
- Engine Cycle Crank
- Emergency stop pushbutton

EMCP 4.2 controller features:

- 24-volt DC operation
- Environmental sealed front face
- Text alarm/event descriptions

Digital indication for:

- RPM
- DC volts
- Operating hours
- Oil pressure (psi, kPa or bar)
- Coolant temperature
- Volts (L-L & L-N), frequency (Hz)
- Amps (per phase & average)
- Power Factor (per phase & average)
- kW (per phase, average & percent)
- kVA (per phase, average & percent)
- kVAr (per phase, average & percent)
- kW-hr & kVAr-hr (total)

Warning/shutdown with common LED indication of shutdowns for:

- Low oil pressure
- High coolant temperature
- Overspeed
- Emergency stop
- Failure to start (overcrank)
- Low coolant temperature
- Low coolant level

Programmable protective relaying functions:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under Frequency (81 o/u)
- Reverse Power (kW) (32)
- Reverse Reactive Power (kVAr) (32RV)
- Overcurrent (50/51)

Communications

- Customer data link (Modbus RTU)
- Accessory module data link
- Serial annunciator module data link

- 6 programmable digital inputs
- 4 programmable relay outputs (Form A)
- 2 programmable relay outputs (Form C)
- 2 programmable digital outputs

Compatible with the following optional modules:

- Digital I/O module
- Local Annunciator
- Remote annunciator
- RTD module
- Thermocouple module

# CONTINUOUS 2050 kW 2563 kVA

60 Hz 1800 rpm 4160 Volts



## Technical Data

Open Generator Set - 1800 rpm/60 Hz/4160 Volts	DM9372	
<b>Tier 4 Interim</b>		
<b>Generator Set Package Performance</b>		
Genset Power rating @ 0.8 pf	2563 kVA	
Genset Power Rating with fan	2050 kW	
<b>Fuel Consumption<sup>1</sup></b>		
100% Load with fan	538.5 L/hr	142.2 Gal/hr
75% Load with fan	417.6 L/hr	110.3 Gal/hr
50% Load with fan	303.6 L/hr	80.2 Gal/hr
<b>Diesel Exhaust Fluid (DEF) Consumption<sup>2</sup></b>		
100% Load with fan	47.3 L/hr	10.4 Gal/hr
75% Load with fan	30.0 L/hr	6.6 Gal/hr
50% Load with fan	15.0 L/hr	3.3 Gal/hr
<b>Cooling System<sup>3</sup></b>		
Engine coolant capacity with radiator	537 L	141.9 gal
Engine coolant capacity	233 L	61.6 gal
Radiator coolant capacity	304 L	80.3 gal
<b>Inlet Air</b>		
Combustion air inlet flow rate	175.1 mm <sup>3</sup> /min	6184.4 cfm
<b>Exhaust System<sup>4</sup></b>		
Exhaust stack gas temperature	495.4 °C	923.7 °F
Exhaust gas flow rate	469.8 mm <sup>3</sup> /min	16590.3 cfm
Exhaust system backpressure (maximum allowable)	6.7 kPA	26.9 in water
<b>Heat Rejection</b>		
Heat rejection to coolant (total)	715 kW	40658 Btu/min
Heat rejection to exhaust (total)	2111 kW	120030 Btu/min
Heat rejection to aftercooler	503 kW	28627 Btu/min
Heat rejection to atmosphere from engine	152 kW	8650 Btu/min
Heat rejection to atmosphere from CEM	265 kW	15066 Btu/min
Heat rejection to atmosphere from generator	83.2 kW	4736 Btu/min
<b>Alternator<sup>5</sup></b>		
Motor starting capability @30% voltage dip	6996 skVA	
Frame	1824	
Temperature Rise	105 °C	189 °F
<b>Lube System<sup>6</sup></b>		
Sump refill with filter	401.3 L	106 gal
<b>Emissions (Nominal)<sup>7</sup></b>		
NOx g/hp-hr	0.4 g/hp-hr	
CO g/hp-hr	0.03 g/hp-hr	
HC g/hp-hr	0.01 g/hp-hr	
PM g/hp-hr	0.01 g/hp-hr	

<sup>1</sup> EPA Tier 4 Interim diesel engines required the use of Ultra Low Sulfur Diesel (ULSD) fuel in order to protect emissions control systems, help comply with emissions standards, and meet published maintenance intervals. ULSD fuel will have  $\leq 15$  ppm (0.0015%) sulfur using the ASTM D5453, ASTM 2622, or SIN 51400 test methods.

<sup>2</sup> Diesel Exhaust Fluid (DEF) is 32.5% urea in de-ionized water, defined by ISO-22241

<sup>3</sup> For ambient and altitude capabilities consult your Caterpillar dealer. Air flow restriction (system) is added to existing restriction from factory.

<sup>4</sup> Backpressure allowance is total backpressure available for the customer excluding the clean emissions module (CEM).

<sup>5</sup> Some packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40 degree C ambient per NEMA MG1-32.

<sup>6</sup> Requires the use of CJ4 oil in order to meet published maintenance intervals.

<sup>7</sup> Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx.

Data shown is based on steady state operating conditions of 77°F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle. Emissions values are tailpipe out with aftertreatment installed. Values shown as zero may be greater than zero but were below the detection level of the equipment used at the time of measurement.

# CONTINUOUS 2050 ekW 2563 kVA

60 Hz 1800 rpm 4160 Volts



## RATING DEFINITIONS AND CONDITIONS

---

**Meets or Exceeds International Specifications:** · AS1359, CSA, IEC60034-1, ISO3046, ISO8528, NEMA MG 1-22, NEMA MG 1-33, UL508A, 72/23/EEC, 98/37/EC, 2004/108/EC

**Continuous** – Output available with non-varying load for an unlimited time. Average power output is 70-100% of the continuous power rating. Typical peak demand is 100% of continuous rated ekW for 100% of operating hours. Continuous power in accordance with ISO 3046. Continuous ambients shown indicate ambient temperature at 100% load which results in a coolant top tank temperature below the alarm temperature

**Ratings** are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions

**Fuel Rates** are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

# CONTINUOUS 2050 kW 2563 kVA


60 Hz 1800 rpm 4160 Volts



## Dimensions

Package Dimensions		
Length	7100mm	279.5 in
Width	2588 mm	101.88 in
Height	2880 mm	113.38 in
Weight	19400 kg	42769 lb

NOTE: For reference only - do not use for installation design. Please contact your local dealer for exact weight and dimensions.

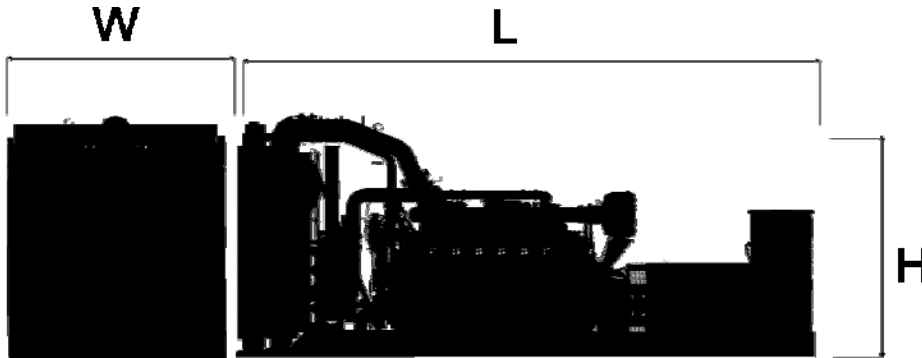

CEM Dimensions		
Length	3366 mm	132.5 in
Width	2230 mm	87.8 in
Height	894 mm	35.2 in
Weight	1814 kg	4000 lb



[www.Cat-ElectricPower.com](http://www.Cat-ElectricPower.com)

©2011 Caterpillar  
All rights reserved.

Sourced: U.S. Sourced

October 2011

EPD0030-E

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, SAFETY.CAT.COM their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.