

UNIVERSAL BARE ROOF CROSS RAIL SYSTEM



Important Warnings:


- Adult Use and Installation Only.
- NOT SUITABLE FOR 2 DOOR VEHICLES.
- Make sure your vehicle roof is clean from any dust and dirt before installing.
- Crossbars must be at least 25" apart for safe transport.
- DO NOT tamper with load strap and/or buckle while in transit.
- DO NOT use in rain, water can potentially run down nylon strapping when wet and into vehicle.
- This product may not be suitable for use on vehicles that are fitted with side curtain or overhead airbags. The straps can prohibit the airbags from deploying properly.
- All items being carried (surfboards, sail boards, kayaks, ladders etc.) require the use of front and rear tie-down straps (not included). Bow and stern safety tie-downs are required for all Quest rooftop transport(s). Failure to correctly install and use safety tie-down lines voids all warranty and liability.
- Remove the product before entering a car wash.
- The Universal Bare Roof Cross Rail System has been designed as a temporary roof load carrying system and should not be left fitted to the vehicle when not in use.
- All vehicular transports are potentially hazardous. Any person(s) using Quest products are personally responsible for following the given directions for use and/or installation.
- It is critical that all Quest racks and accessories be properly and securely attached to your vehicle. Improper attachment could result in a serious accident, and could cause serious bodily injury or death to you or to others.
- You are responsible for securing the racks and accessories to your car, checking the attachment's prior to use, and periodically inspecting the products for adjustment, wear, and damage.
- You must read and understand all of the instructions and cautions supplied with your Quest products(s) prior to installation or use.
- If you do not understand all of the instructions and cautions, or, if you have no mechanical experience and are not thoroughly familiar with the installation procedures, you must have the product installed by a professional installer.



Load Bars with Tower
Attachment Brackets
& Load Straps(2)



Towers (4)



End Caps (4)






Hardware &
Allen Wrench

! WARNING

- NOT SUITABLE FOR 2 DOOR VEHICLES.
- Make sure your vehicle roof is clean from any dust and dirt before installing.
- Crossbars must be at least 25" apart for safe transport.
- DO NOT tamper with Load Strap and/or buckle while in transit.
- DO NOT use in rain, water can potentially run down nylon strapping when wet and into vehicle.
- This product may not be suitable for use on vehicles that are fitted with side curtain or overhead airbags. The straps can prohibit the airbags from deploying properly.
- All items being carried (surfboards, sail boards, kayaks, ladders etc.) require the use of front and rear tie-down straps (not included). Bow and stern safety tie-downs are required for all Quest rooftop transport(s). Failure to correctly install and use safety tie-down lines voids all warranty and liability.
- Remove the product before entering a car wash.
- The Universal Bare Roof Cross Rail System has been designed as a temporary roof load carrying system and should not be left fitted to the vehicle when not in use.

ASSEMBLY

- Insert the tower attachment bracket into the top of the Tower as pictured in Figure 1.
- Insert the nylon lock nut in the hex shaped hole of the Tower. See Figure 2.
- Insert Allen bolt into the remaining round hole and secure with provided wrench. Do Not over tighten. See Figures 3 & 3A.
- Add the End Caps to crossbars. Push firmly to secure. See Figure 4. Repeat steps 1 thru 4 to complete remaining 3 Towers.
- With assembly complete, loosen the Towers' set screw on the underside of the tower attachment bracket. This will allow the tower to slide along the cross bar so we can fit it to the vehicle's width. **NOTE:** We will tighten this screw after fitting the vehicle. See Figures 5 & 5A.

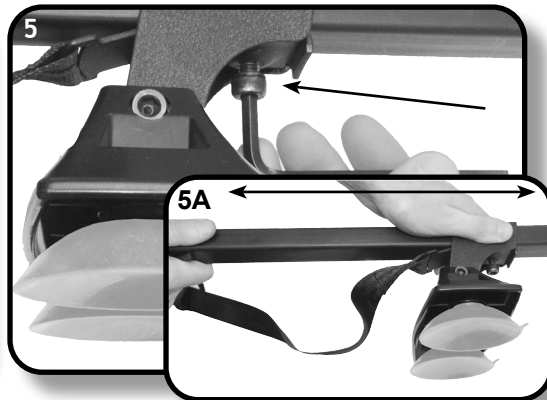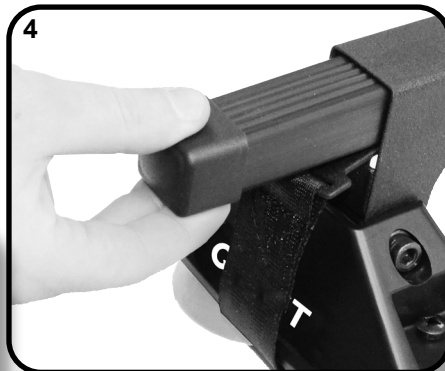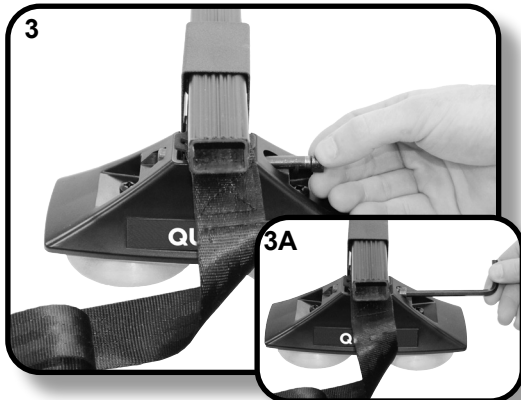

You should now have two (2) completely assembled crossbars ready to install.

→
Review the previous steps if yours does not look like the photo.





! WARNING - IMPORTANT NOTE ON MOUNTING: !

- **CAREFUL ATTENTION MUST** be made to the placement of the Towers on the vehicle's roof. This is a very critical step to safety and function.
- The proper placement is right along the edge of the roof, at its' strongest point. The vacuum cups will act as cushions or pads even if placed over roof ridge lines preventing a full seal.
- **DO NOT** place Towers inwards or on a glass sunroof.

MOUNTING

- Begin with opening the vehicle's doors and place crossbars in desired location. Measuring at least 25" between them. See Figure 1.
- Slide the Tower(s) along the crossbar and place the Tower(s) as close to the edge as possible (see more sample images below). See Figure 2.
- With the Towers placed as close to the edge as possible, secure the Towers by firmly pressing them downwards securing them to the roof. See Figure 3.
- With the crossbars in position, Go back and fully tightening the Towers set screw that we loosened in Step 5 of the assembly. See Figure 4.

NOTE: THIS SET SCREW MUST BE TIGHT FOR SAFE TRANSPORT!

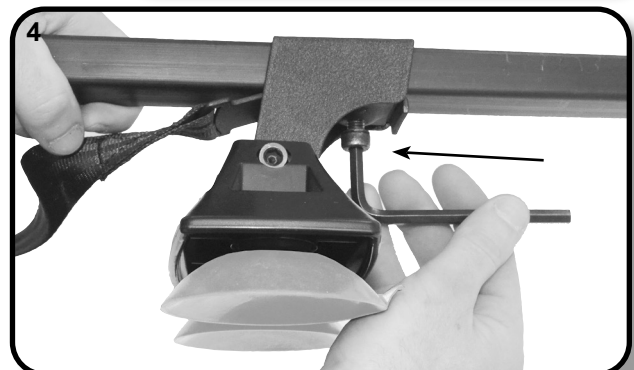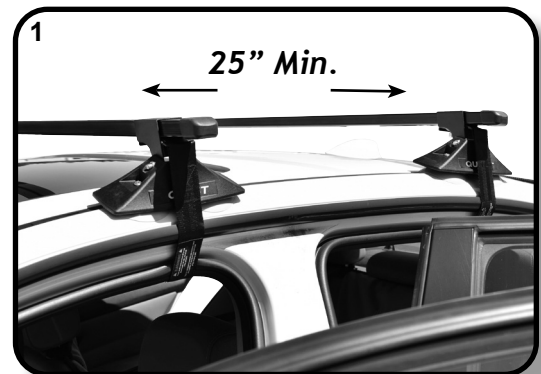

NOTE TOWER POSITIONS BELOW:

WRONG PLACEMENT




CORRECT PLACEMENT



MOUNTING Cont.

- Pull the Load Strap through the vehicle, and into the large cam buckle from the rear. See Figure 5.
- Pull firmly towards you to tighten. Push/pull the secured strap downwards to check the security/tightness. If the strap loosens, re-do the strap through the back of cam buckle. See Figure 6&7.
- Neatly fold up any leftover strapping and secure with the hook-loop enclosure.

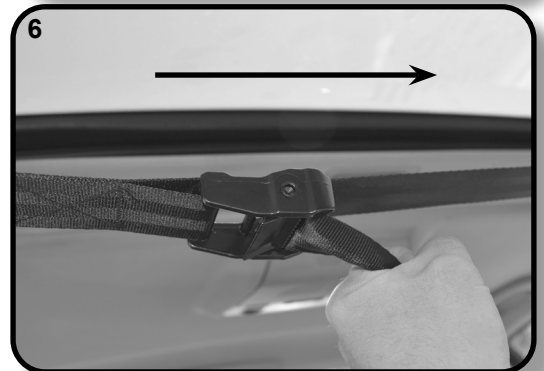

MOUNTING Cont.

Your Universal Bare Roof
Cross Rail System system is now complete!

Be sure to double check all hardware and
straps prior to transport.



WARNING - IMPORTANT NOTE ON MOUNTING:

- **CAREFUL ATTENTION MUST** be made to the placement of the Towers on the vehicle's roof. This is a very critical step to safety and function.
- The proper placement is right along the edge of the roof, at its' strongest point. The vacuum cups will act as cushions or pads even if placed over roof ridge lines preventing a full seal.
- **DO NOT** place towers inwards or on a glass sunroof.

WARNING

- NOT SUITABLE FOR 2 DOOR VEHICLES.
- Make sure your vehicle roof is clean from any dust and dirt before installing.
- Crossbars must be at least 25" apart for safe transport.
- DO NOT tamper with Load Strap and/or buckle while in transit.
- DO NOT use in rain, water can potentially run down nylon strapping when wet and into vehicle.
- This product may not be suitable for use on vehicles that are fitted with side curtain or overhead airbags. The straps can prohibit the airbags from deploying properly.
- All items being carried (surfboards, sail boards, kayaks, ladders etc.) require the use of front and rear tie-down straps (not included). Bow and stern safety tie-downs are required for all Quest rooftop transport(s). Failure to correctly install and use safety tie-down lines voids all warranty and liability.
- Remove the product before entering a car wash.
- The Universal Bare Roof Cross Rail System has been designed as a temporary roof load carrying system and should not be left fitted to the vehicle when not in use.



Limited Lifetime Warranty

This Limited Lifetime Warranty covers Quest- brand Universal Bare Roof Cross Rail Systems and has been specifically identified for inclusion in the program and is effective for as long as the original retail purchaser owns the product. This Limited Lifetime Warranty is limited to the original purchaser of the product and is nontransferable. Keep the original sales receipt – proof of purchase is required to make a warranty claim.

Subject to the limitations and exclusions described in this limited warranty, DICK'S Sporting Goods, Inc. or any of its affiliates (the "Company") will remedy defects in materials and/or workmanship by repairing or replacing, at its option, a defective product without charge for parts. The Company may elect, at its option, not to repair or replace a defective product but rather issue to the original retail purchaser a refund equal to the purchase price paid for the product, or credit to be used toward the purchase of a replacement Quest product.

Warranty Exclusions:

This warranty does not cover, and no warranty is given for defects or problems caused by normal wear and tear, which includes, but is not limited to, surface (aesthetic) metal corrosion, scratches, dents, deformities, accidents, unlawful vehicle operation, or any modification of a product not performed or authorized in writing by the Company. In addition, this warranty does not cover problems resulting from conditions beyond the Company's control including, but not limited to theft, misuse, overloading, or failure to assemble, mount or use the product in accordance with the written instructions or guidelines included with the product provided to the original retail purchaser.

Damage to original purchaser's vehicle, cargo, or property, and/ or to any other person or property is not covered by this warranty. In no event will the Company be liable for any direct, indirect, consequential, incidental, special, exemplary, or punitive damages or for any other damages of any kind or nature (including but not limited to lost profits, lost income or lost sales).

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not be applicable.

Implied Warranties Limited In Duration

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.



Disclaimer

Repair or replacement of a defective product, or the issue of a refund or credit (as determined by the Company) is the original retail purchaser's sole and exclusive remedy under this warranty. Except to the extent provided above or prohibits by law, the Company disclaims all other warranties, whether express, implied, statutory or otherwise.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

TO MAKE A CLAIM:

If the product is believed to be defective, the original retail purchaser should contact the Company, who will give the original retail purchaser instructions on how to proceed at the following:

If in writing, mail to:

Dick's Sporting Goods, Inc.
345 Court St.
Coraopolis, PA 15108
Attn: Customer Service

If by telephone, call: **1-866-677-4771**

If by e-mail, **to: customer.service@dcsg.com**

In the event that the product must be returned to the Company, a representative at the email address above will provide the original purchaser with return shipping instructions. The original purchaser will be responsible for the cost of mailing the product to the Company. In order to be eligible to receive any remedy under this warranty, a copy of the original purchase receipt, a description of the defect and a return address must be provided.