

baby jogger®

city view™ with SecureStop™ anti-rebound bar

ALL-IN-ONE CAR SEAT



©2018 baby jogger NWL0000706217C 2/18

babyjogger.com

KEEP INSTRUCTIONS FOR FUTURE USE

Do not install or use this child restraint until you read and understand the instructions in this manual.

FAILURE TO PROPERLY USE THIS CHILD RESTRAINT INCREASES THE RISK OF SERIOUS INJURY OR DEATH IN A SUDDEN STOP OR CRASH.

TABLE OF CONTENTS

Safe Use Checklist.....	3
Registration.....	5
Recall Information.....	6
Warnings.....	7
LATCH System.....	9
Choosing a Seat Location.....	10
Vehicle Seat Belts.....	11
Features.....	16
Rear-Facing Installation.....	20
• Rear-Facing Safe Use Checklist	
• Using the Anti-Rebound Bar	
• Install Rear-Facing With LATCH Strap	
• Install Rear-Facing With Vehicle Seat Belt	
Forward-Facing Installation.....	29
• Forward-Facing Safe Use Checklist	
• Install Forward-Facing With LATCH Strap	
• Install Forward-Facing With Vehicle Seat Belt	
Booster Installation.....	37
• Booster Safe Use Checklist	
• Booster Install	
Securing Child With 5-Point Harness.....	43
Securing Child In Booster.....	47
Moving the LATCH Strap.....	49
Accessories.....	52
Care and Maintenance.....	54
Warranty.....	58
Replacement Parts.....	60

SAFE USE CHECKLIST

Your child's safety depends on you. No car seat can guarantee protection from injury in every situation, but proper use helps reduce the risk of serious injury or death.

Even if this car seat seems easy to figure out on your own, you must follow the detailed instructions in this instruction manual to ensure the steps below are performed correctly.

SAFE USE CHECKLIST	For More Information...
<p>Review height and weight guidelines to choose the correct mode of use for your child.</p> <ul style="list-style-type: none"> • Rear-Facing: 5-40 lb (2.3-18 kg) • Forward-Facing: 22-65 lb (10-30 kg) and 49" (125 cm) or less • Booster Use: 40-100 lb (18.1-45 kg), 43-57" (110.1-145 cm), and at least 4 years old • Children less than 22 lb (10 kg) MUST use this car seat rear-facing. 	<p>Review pages 20, 29, 37</p>
<p>Choose a suitable location for this car seat in your vehicle.</p> <ul style="list-style-type: none"> • Never place a child rear-facing in a seating position with an active frontal airbag. • You MUST use a lap/shoulder vehicle seat belt when using as a booster seat. 	<p>Review pages 11 - 12</p>
<p>Install this car seat tightly in your vehicle.</p> <ul style="list-style-type: none"> • Car seat should not move at the belt path more than 1" (2.5 cm) from side to side and front to back when installed rear-facing or forward-facing. • Use the top tether strap when using forward-facing with the 5-point harness system. 	<p>Review pages: Rear-Facing 20 - 28. Forward-Facing 29 - 36. Booster 37 - 42</p>

SAFE USE CHECKLIST

For More Information...

Secure your child tightly in this car seat with the 5-point harness system:

- Harness straps should be snug enough you cannot pinch the strap at the shoulder.
- Chest clip should be at armpit level.
- **Rear-Facing:** Harness strap height **MUST BE AT OR JUST BELOW** top of child's shoulders. Top of head **must** be 1" (2.5 cm) below the headrest/harness adjustment lever.
- **Forward-Facing:** Harness strap height **MUST BE AT OR JUST ABOVE** top of child's shoulders. Top of child's ears **must** be below top of headrest.

Securing your child in the booster seat:

- The shoulder belt should be centered between the child's neck and edge of shoulder and the lap belt should lay low on the child's hips.
- Never use the lap belt only.

Note: Preterm or low birth weight infants may be at special risk in a vehicle or aircraft. According to the AAP, these infants may suffer breathing issues if improperly reclined in a car seat. When rear-facing, use the corrected age for preemies. Baby Jogger advises that you have your physician or hospital staff evaluate your infant and recommend the proper car seat or car bed before you and your infant leave the hospital.

Review pages 43 - 48

REGISTERING YOUR CHILD RESTRAINT

Please complete the pre-paid registration card that is attached to your child restraint and send the portion shown below in today or register online at:

www.babyjogger.com/carseatregistration.

IMPORTANT

In case of a recall, we can reach you only if we have your name and address. You MUST send in the attached card or register online to be on our recall list.

We've already paid the postage.

Do it today.



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES



BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 66 ELVERSON PA

POSTAGE WILL BE PAID BY ADDRESSEE

BABY JOGGER, LLC

P.O. BOX 169

ELVERSON, PA 19520-9901



IMPORTANTE: Debe registrar este asiento para el automóvil para que puedan comunicarse con usted en caso de un llamado de devolución del asiento.

FOR YOUR CHILD'S CONTINUED SAFETY

Please take a few moments to promptly fill out and return the attached card or register online.

Although child restraint systems undergo testing and evaluation, it is possible that a child restraint could be recalled.

In case of recall, we can reach you only if we have your name and address, so please send in the card or register online to be on our recall list.

Please fill this card out and mail it NOW, or register online at <http://www.babyjogger.com/carseatregistration> while you are thinking about it.

The card is already addressed and we've paid the postage.

PD344828C

Tear off and mail this part

Consumer: Just fill in your name and address. Please print.

Your first name

Your last name

Your street address

City

State Zip Code -

CHILD RESTRAINT REGISTRATION CARD

BABY JOGGER®

MODEL NO:

SERIAL NO:

MANUFACTURED IN (YYYY/MM/DD):

DO NOT USE AFTER (YYYY/MM/DD):

Baby Jogger, LLC, Atlanta, GA 30328

1.800.241.1848 • www.babyjogger.com • Made In China

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, email address if available and the restraint's model number and manufacturing date to:

Baby Jogger, LLC
 P.O. Box 169, Elverson, PA 19520-9901
 or call 1-800-241-1848
 or register online at
www.babyjogger.com/carseatregistration

FOR RECALL INFORMATION

Call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.

CERTIFICATION

This child restraint meets or exceeds all applicable requirements of Federal motor vehicle safety standard 213 for use in motor vehicles.



This child restraint is certified for use in aircraft only when used with the internal harness system. Use only forward-facing aircraft seats. For rear-facing installation, see pages 15 and 25 for Lap Belt Installation. For forward-facing installation, see pages 15 and 34 for Lap Belt Installation, but do not use top tether. Contact the airline for their specific policies.



This child restraint is **NOT** certified for use in aircraft when used as a booster seat because aircrafts do not have shoulder belts.

IF YOU NEED ASSISTANCE OR HAVE ANY QUESTIONS

If you have any questions regarding installation of your seat, please contact consumer care:

Baby Jogger, LLC
 4110 Premier Drive
 High Point, NC 27265
 1-800-241-1848
www.babyjogger.com

For information regarding child restraints:

www.NHTSA.gov
www.safekids.org
www.seatcheck.org

WARNING

- Read this Owner's Manual completely **BEFORE** first use of your restraint system!
- Keep instructions for future use.
- Even if using this child restraint seems easy to figure out on your own, it is very important to **READ, UNDERSTAND AND FOLLOW THE OWNER'S MANUAL**.
- Failure to completely follow the instructions provided in this manual as well as the labels on this product can result in **DEATH** or **SERIOUS INJURY**.
- Read your vehicle owner's manual for important information concerning child restraint installation.



- **NEVER PLACE THIS CHILD RESTRAINT REAR-FACING IN A VEHICLE SEATING LOCATION THAT HAS AN ACTIVE FRONT AIR BAG.**
If an air bag inflates, it can hit the child and car seat with great force and cause serious injury or death to your child.
- Review your vehicle owner's manual for more information about air bags and car seat use.
- Only place this child restraint in a rear-facing direction on a forward facing vehicle seat when using it in a vehicle. **NEVER** install this child restraint on vehicle seats that face the side or rear of the vehicle.
- Never leave child unattended.
- **DO NOT ALLOW** anyone who has not read the instruction manual to install or use this child restraint.
- Register your child restraint with the manufacturer.
- According to accident statistics, children are safer when properly restrained in rear seating positions, than in the front seating positions.
- This Child Restraint System must not be used without the cover.
- **THE CHILD RESTRAINT CAN BECOME VERY HOT IF LEFT IN THE SUN.** Contact with these parts can burn your child's skin. Always touch the surface of any metal or plastic parts before putting your child in the child restraint.
- **NEVER USE A SECOND-HAND CHILD RESTRAINT** or a child restraint whose history you do not know.
- **DO NOT** ever take a baby out of the restraint system for any reason while vehicle is in motion. If your baby needs attention, find a safe place and pull off the road.
- Do always check the security of your restraint system before each journey.
- Your child can be injured in a vehicle even if you are not in a crash. Sudden braking and sharp turns can injure your child if the child restraint is not properly installed or if your child is not properly secured in the child restraint.

- The American Academy of Pediatricians (AAP) recommends that children ride rear-facing until the age of 2 or until they reach the maximum rear-facing height or weight rating for their seat, and when forward-facing, children should use the built-in harness system for as long as possible until they reach the maximum forward-facing weight or height for their car seat. After reaching the maximum forward-facing weight or height, they also recommend that children 4 feet 9 inches (145 cm) tall or under should ride in a belt-positioning booster seat.
- Secure this child restraint with the vehicle's child restraint anchorage system (LATCH) if available or with a vehicle belt.
- Do not use both the vehicle seat belt and LATCH strap at the same time when using the car seat with the 5-point harness.
- Always secure car seat with LATCH or a vehicle seat belt, even when unoccupied. In a crash, an unsecured car seat can injure passengers.
- **ALWAYS** store the LATCH connectors when they are not being used for installation.
- Never attach two LATCH connectors to one vehicle lower anchor point unless specifically allowed by the vehicle manufacturer.
- **DO NOT** remove LATCH system from car seat. If using vehicle seat belt to secure car seat, LATCH connectors must be stored.
- **DO NOT** allow children to play with or around this child restraint.
- If car seat is in a crash, it must be replaced. **DO NOT** use it again! A crash can cause unseen damage and using it again could result in serious injury or death.
- **DISCONTINUE USE** of this child restraint after 10 years from the manufacture date. The manufacture date can be found on the back of your child restraint.
- **DO NOT** use this child restraint unless your child meets the following height and weight criteria:
Rear-Facing: 5-40 lb (2.3-18 kg)
Forward-Facing: 22-65 lb (10-30 kg) and 49" (125 cm) or less
Booster Use: 40-100 lb (18.1-45 kg), 43-57" (110.1-145 cm), and at least 4 years old
 Children less than 22 lb (10 kg) **MUST** use this car seat rear-facing.
- Always use the restraint system.
- Never use this child restraint if it has been damaged or broken or any component is missing. Do not use a cut, frayed or damaged child restraint harness, vehicle seat belt or LATCH belt.
- It is not intended to be used in low-speed vehicles such as golf carts, ATV's or any other non-certified vehicles.


LATCH SYSTEM

LATCH stands for Lower Anchors and Tethers for Children. LATCH consists of lower anchors and top tether anchors, which are built-in to your vehicle, and connecting hooks that are built-in to your car seat. Lower anchors are used **INSTEAD** of the vehicle's seat belt to secure the child seat to the vehicle. Top tethers are used **IN ADDITION** to the lower anchors OR the vehicle's seat belt to secure a forward-facing car seat to the vehicle.

The LATCH system can make installation easier without using the vehicle's seat belts. LATCH is a way to secure your child restraint to your vehicle by using the LATCH connectors on your child restraint. These connectors attach to the lower anchors in certain vehicle seating positions. Refer to your vehicle owner's manual for LATCH locations.

The child restraint's lower anchors are designed to be used at the standard LATCH spacing of 11" (28 cm) from the center of one anchor point to the center of another anchor point. Please refer to your vehicle owner's manual for information about using LATCH in certain seating positions.

If your vehicle does not have lower anchor points, you can still safely install your child restraint with the vehicle's belt system.




CHOOSING LATCH OR SEAT BELTS

This car seat can be installed in your vehicle using either the vehicle seat belt **OR** the LATCH system, both are equally safe to use. You can use both vehicle seat belt and LATCH system **ONLY** in the booster mode and if the LATCH connectors **DO NOT** interfere with any vehicle seat belts or buckles.

For seating positions equipped with LATCH, experts recommend trying the LATCH installation first and only using the seat belt in that seating position if LATCH, for some reason, results in a looser fit. If you want to use the center rear seat and LATCH is not available in that position (check the vehicle owner's manual), try the seat belt to be sure you can get a tight installation. If you cannot, try using LATCH in a different seating position. Remember to only use LATCH in seating positions recommended by your vehicle manufacturer.


Do not use the lower anchors of the child restraint anchorage system (LATCH system) to attach this child restraint when restraining a child weighing more than 45 lb (20 kg) with the internal harnesses of the child restraint.

HOW TO REMOVE LATCH AND TOP TETHER

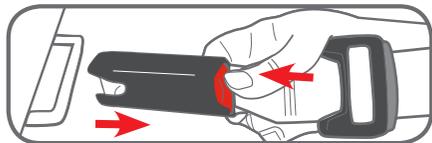


LATCH

To remove the LATCH connectors from the lower anchors, push in on the red buttons and pull them off.

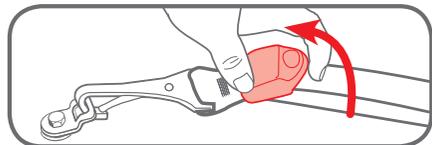

Top Tether Strap

To remove, lift up on the tether lock to release the tension.

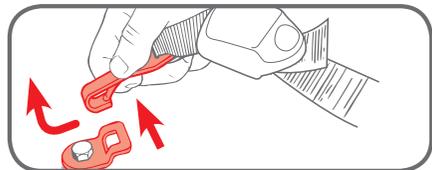


Press in on the hook's spring. Push tether hook in, then lift up and pull away from tether anchor.

CHOOSING VEHICLE SEAT LOCATION



⚠️ WARNING!

- DO NOT place rear-facing child seat on front seat with airbag. DEATH or SERIOUS INJURY can occur.
- Failure to place the child restraint in the correct seating positions increases the risk of serious injury or death.



- The back seat is the safest place for children 12 and under. Owners of vehicles with airbags should refer to their owner's manual for child restraint installation instructions.



- The VEHICLE seat must face forward.
- Some vehicles have specific requirements for where the car seat can be installed, so be sure to check your vehicle owner's manual for available seating positions, if any. For example, sometimes the center rear seat has a lap only vehicle seat belt, which cannot be used when this car seat is in Booster mode.
- NEVER place the child restraint on any vehicle seat that does not lock. Folding seats can fall forward and could cause serious injury to your child in a vehicle crash.



- Never install this car seat in booster mode with vehicle lap only seat belt.

In the event there is no available back seat and / or you have no other option than to place a child other than an infant in a rear-facing car seat in a front passenger seating position, the National Highway Traffic Safety Administration (NHTSA) recommends that you take the following steps:

- Ensure the child is properly restrained according to their age and size.
- Move the seat as far back as possible.
- Make sure the child is not leaning out of position, such as leaning forward into the deployment path of the air bag.
- Set the air bag ON-OFF switch, if available, to the OFF position.

UNSAFE VEHICLE SEAT BELTS

⚠️ WARNING! The following types of vehicle seat belts are NOT compatible with this child seat. If any of the belt types listed are in the chosen seating position, choose another seating position within in the vehicle.



Motorized Shoulder Belt with Lap Belt



Lap or Shoulder Belt Mounted on Vehicle Door


Some vehicles you may not get a secure fit. Read both your vehicle and car seat manuals.



Belts Forward of the Seat Crease


SAFE VEHICLE SEAT BELTS

There are two different types of vehicle seat belts that can be used with this car seat:

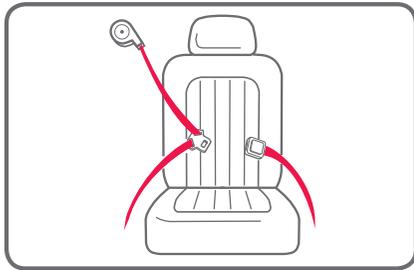

Lap/Shoulder Seat Belt

3 connections points. Can be used in all car seats modes of use.

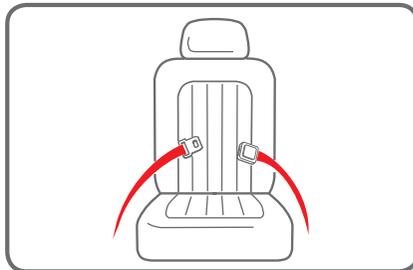

Lap Only Seat Belt


2 connection points. **Can ONLY be used in harness mode.**

LAP/SHOULDER SEAT BELT INSTALLATION - HARNESS MODE

Always review your vehicle owner's manual for specific information about your vehicle seat belts.

There are three types of retractors: **ELR** (Emergency Locking Retractor), **ALR** (Automatic Locking Retractor) , and **Switchable** (ELR switch to ALR). To determine your type of retractor, follow these steps:

1. **Slowly** pull the belt out about halfway and stop.
2. Let the belt retract back several inches.
3. Try to **slowly** pull the belt out more. If the belt cannot be pulled any further, it is **ALR**. If it can be pulled further, go to the next step.
4. **Slowly** pull the belt all the way out, and then allow it to retract several inches.
5. Try to pull the belt all the way out again. If it cannot be pulled out, it is **Switchable**. If it can still be pulled out freely, it is **ELR**.



Note: Most vehicles manufactured after 1996 will have Switchable retractors in the back seat. If you have any questions about your retractor type, consult your vehicle owner's manual or call Baby Jogger for assistance.

HOW TO LOCK YOUR LAP/SHOULDER VEHICLE SEAT BELT



Sliding Latch Plate and Switchable Retractor

A latchplate that slides freely on the belt webbing and cannot, by itself, hold the belt snug around a car seat.

When installing the car seat, route the vehicle seat belt through the proper belt path and buckle it in.

Slowly pull the shoulder belt all the way out to switch it to locking mode. Then, as you pull the vehicle seat belt tight, feed all the slack back into the retractor.

Grab the sides of the seat at the belt path and slide the seat side to side and front to back. The seat should not move more than 1" (2.5 cm).

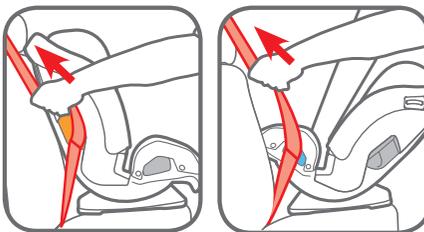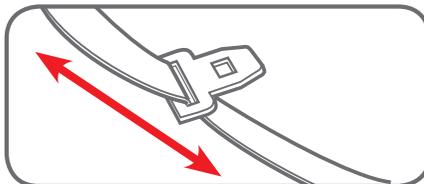



Note: With the vehicle seat belt in this locking mode, all the tension is upwards in the shoulder belt. This may start to tilt your car seat sideways. If this happens, use a locking clip instead of switching the retractor. See Sliding Latch Plate and ELR Retractor.

Locking Latchplate and ELR Retractor

A latchplate that holds the lap belt snug after it has been adjusted; contains a metal bar on the underside of the hardware that "locks" the belt in position.

When installing the car seat, route the vehicle seat belt through the proper belt path and buckle it in. Then, pull upwards on the shoulder belt so that the lap belt gets tight around the car seat.

Grab the sides of the seat at the belt path and slide the seat side to side and front to back. The seat should not move more than 1" (2.5 cm).

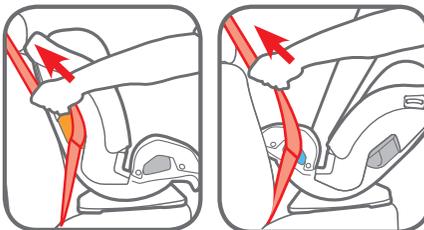
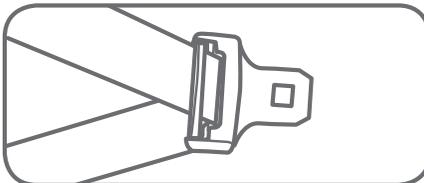


Sliding Latch Plate and ALR Retractor

A latchplate that slides freely on the belt webbing and cannot, by itself, hold the belt snug around a car seat.

Slowly pull the shoulder belt all the way out. Route the vehicle seat belt through the proper belt path and buckle it in. Then, as you pull the vehicle seat belt tight, feed all the slack back into the retractor.

Grab the sides of the seat at the belt path and slide the seat side-to-side and front-to-back. The seat should not move more than 1" (2.5 cm).

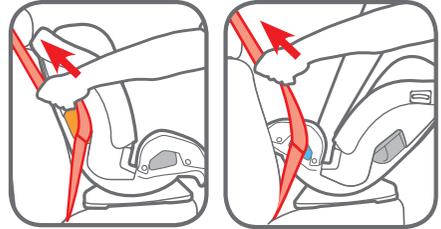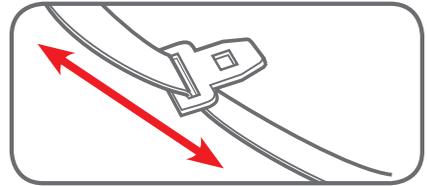

Sliding Latch Plate and ELR Retractor

A latchplate that slides freely on the belt webbing and cannot, by itself, hold the belt snug around a car seat.




With this retractor, you will need to use the locking clip to lock the vehicle seat belt.

Call us at 1-800-241-1848 to order a locking clip.

Route the vehicle seat belt through the proper belt path and buckle it in. Pull the vehicle seat belt tight. While pushing down on seat, pinch the two straps together behind the buckle tongue. Unbuckle the belt without allowing it to slip.

Attach locking clip to lap and shoulder belts as shown.

Rebuckle belt. Check that lap belt does not move by pulling hard. If belt loosens or lengthens, repeat procedure.

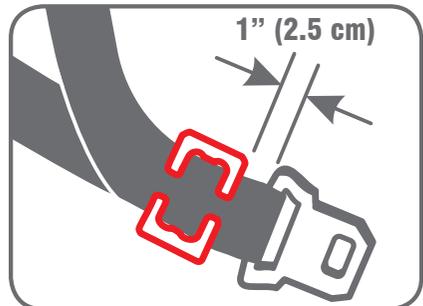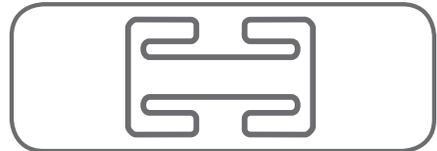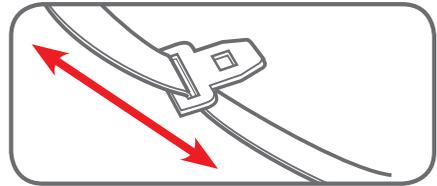


LAP BELT INSTALLATION - DO NOT USE IN BOOSTER MODE

Always review your vehicle owner's manual for specific information about your vehicle seat belts.


Locking Latch Plate and No Retractor

When installing the car seat, route the lap seat belt through the proper path and buckle it in. Then, pull upwards on the tail of the belt so that the lap belt gets tight around the car seat.

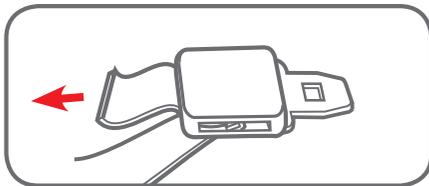


Sewn On Latch Plate and ALR Retractor

Slowly pull the lap belt all the way out. Route the vehicle seat lap belt through the proper belt path and buckle it in. Then, pull the lap belt tight while feeding all the slack back into the retractor.

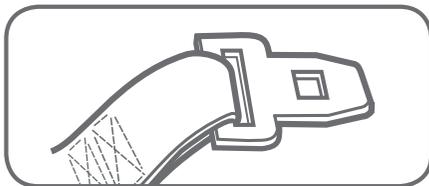

Grab the sides of the seat at the belt path and slide the seat side to side and front to back. The seat should not move more than 1" (2.5 cm).

FEATURES

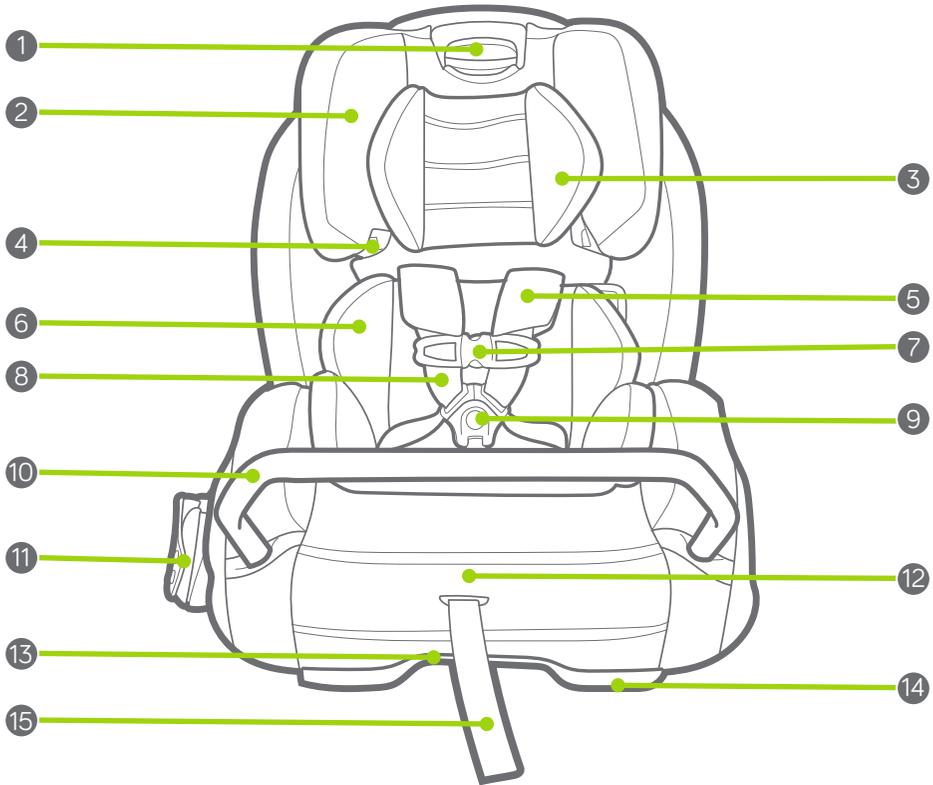

1 Headrest/Harness Adjustment Handle

2 Headrest

3 Head Support

4 Booster Shoulder Belt Guide

5 Harness Covers

6 Body Support

7 Chest Clip

8 Harness Straps

9 Buckle

10 Anti-Rebound Bar


11 Cup Holder

12 Harness Release Lever (under seat pad)


13 Recline Handle

14 Seat Base

15 Harness Adjustment Strap

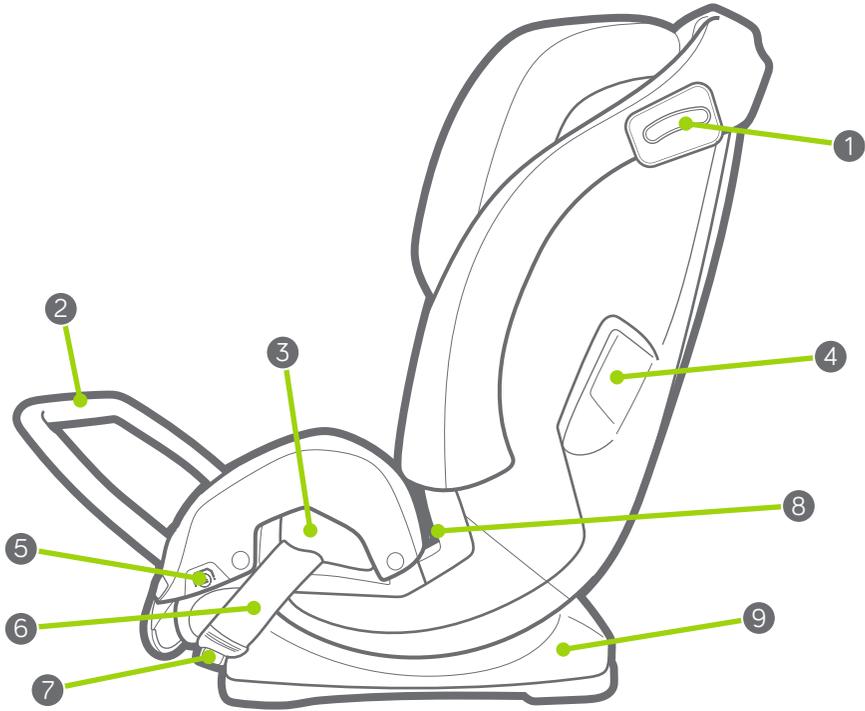


- | | |
|-----------------------------------|-------------------------|
| 1 Rear-Facing Level Indicator | 6 LATCH Strap |
| 2 Anti-Rebound Bar | 7 LATCH Strap Storage |
| 3 Rear-Facing Belt Path | 8 Booster Lap Belt Path |
| 4 Forward-Facing Belt Path | 9 Seat Base |
| 5 Anti-Rebound Bar Release Button | |

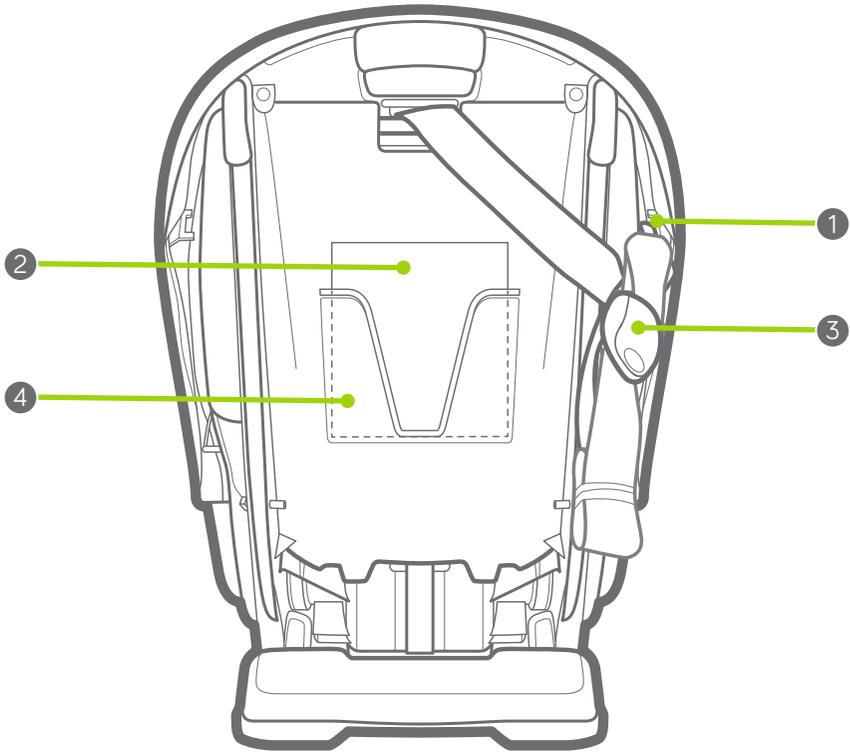

- 1 Top Tether Strap Storage
- 2 Instruction Manual

- 3 Top Tether Strap
- 4 Instruction Manual Storage

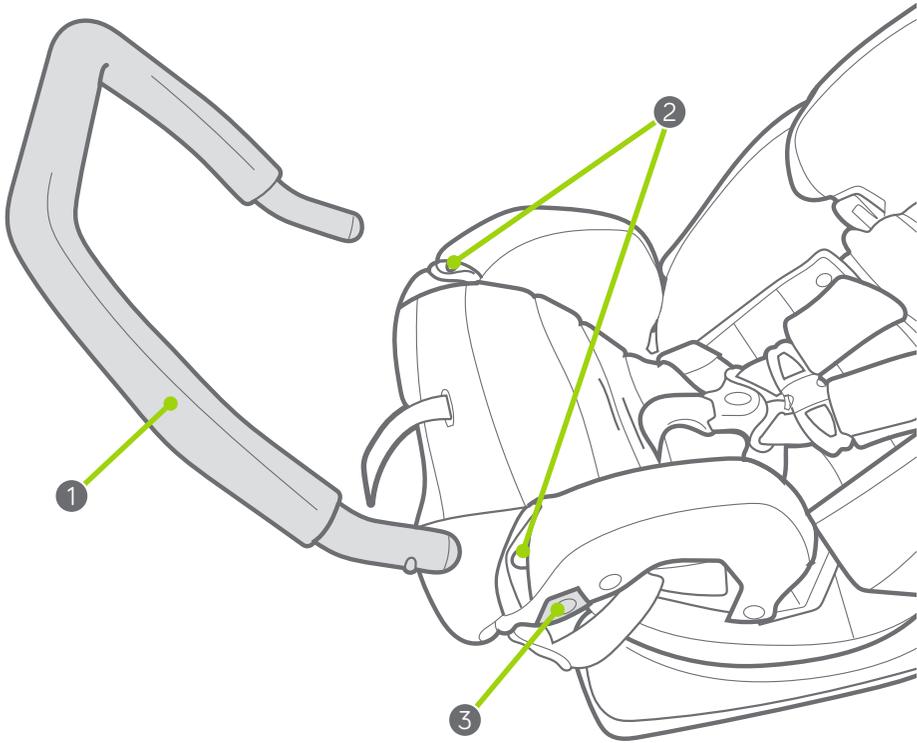

- 1 Anti-Rebound Bar
- 2 Attachment Slots

- 3 Release Button

REAR-FACING SAFE USE CHECKLIST



LATCH STRAP



VEHICLE LAP/SHOULDER SEAT BELT



VEHICLE LAP ONLY SEAT BELT

Rear-Facing:

5-40 lb (2.3-18 kg) and whose head is at least 1 inch (2.5 cm) below the headrest adjustment handle*


- Place the car seat rear-facing in the vehicle back seat.
- Make sure LATCH strap or vehicle seat belt is routed through the rear-facing belt path, marked with a blue label.
- Install this car seat tightly in your vehicle. Car seat **should not move** at the rear-facing belt path more than 1" (2.5 cm) from side to side and front to back.
- Vehicle **MUST** be on level ground.
- Check the rear-facing level indicator to make sure the seat is level.
- Harness straps must be **at or just below** the top of child's shoulders and chest clip must be at **armpit level**.
- Infants who weigh less than 22 lb (10 kg) **MUST be rear-facing**.
- The AAP recommends that children ride rear-facing until the age of 2 or until they reach the maximum rear-facing height or weight rating for their car seat. This car seat can remain rear-facing up to 40 lb (18 kg).
- When using anti-rebound bar: Make sure the bar is securely attached



⚠ WARNING! NEVER place this child restraint rear-facing in a vehicle seating location that has an active front air bag.

*Check your state laws and the AAP/NHTSA recommendations.

INSTALL REAR-FACING WITH LATCH STRAP




USING THE ANTI-REBOUND BAR


Note: It is optional to use the anti-rebound bar when the car seat is used rear-facing. **NEVER** use the anti-rebound bar when the car seat is used forward-facing.

Skip to step #5 if not using the anti-rebound bar.


1. Attach the anti-rebound bar to the front of the car seat. First unsnap the seat pad from the side of the armrest. Then locate the attachment slots, you may have to spread the fabric apart with your fingers to see them clearly.



2. Insert the anti-rebound bar into the car seat.




3. Make sure the bar is not being installed upside-down. The text "THIS SIDE UP" should be read to ensure correct orientation.




4. The anti-rebound bar is secure when it clicks into place on both sides. Pull on each side of the bar to make sure it is securely attached.
Snap the seat pad fabric back onto the side of the armrest.

⚠ WARNING! The anti-rebound bar should only be used Rear-Facing. Remove the anti-rebound bar when using this car seat Forward-Facing. To remove the anti-rebound bar from the car seat, first, push the release buttons marked with the label on both sides of the car seat. Then pull the anti-rebound bar out of the car seat.





Review your vehicle's owner manual for LATCH location and use.


5. Make sure the LATCH strap is in the Rear-Facing Belt Path, marked with a blue outlined label. If it is not, see page 49 to move LATCH strap.




6. Place the seat in one of the two rear-facing recline positions.

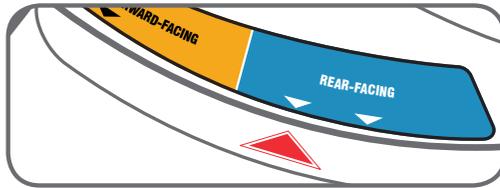

7. Push in on the red buttons on the LATCH connectors and remove from storage location.





8. For easier installation, extend the LATCH strap to its maximum length by pressing the gray button and pulling on the strap.





9. Place car seat Rear-Facing in back seat of the vehicle. Place the base flat on the vehicle seat. Push it back until the front of the car seat touches the vehicle seat back. Center the car seat between the lower LATCH anchors.



10. Check the Level Indicator. Vehicle **MUST** be on level ground. The bubble must be completely within the blue zone. Adjust the recline until the bubble is completely within the blue zone.

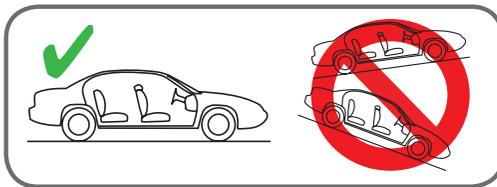


11. Connect LATCH connectors to vehicle's lower LATCH anchors. LATCH strap should lay as flat as possible and not be twisted.

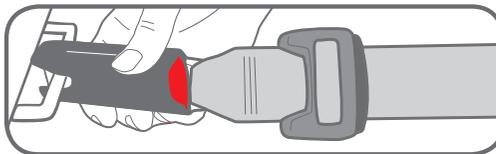

12. Tighten the LATCH strap. Press down firmly in the center of the car seat while tightening the LATCH strap.





Note: for easier tightening, you may need to pull the tail of the LATCH strap through the belt path as shown.



13. Test for tightness. Grab the sides of the seat where the LATCH strap is and slide the car seat side to side and front to back.
If the seat moves less than 1" (2.5 cm), it is tight enough.




14. Check the Level Indicator. Vehicle **MUST** be on level ground. The bubble must be completely within the blue zone. Adjust the recline until the bubble is completely within the blue zone.

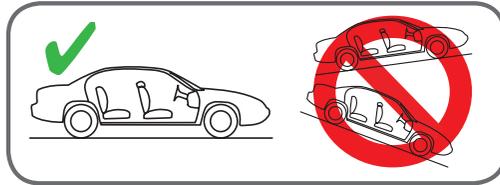

If needed, rolled towels may be placed under the car seat at the vehicle seat crease, until the bubble is completely in the blue zone.

See page 43 to secure your child.

INSTALL REAR-FACING WITH VEHICLE SEAT BELT




USING THE ANTI-REBOUND BAR


Note: It is optional to use the anti-rebound bar when the car seat is used rear-facing. **NEVER** use the anti-rebound bar when the car seat is used forward-facing.

Skip to step #5 if not using the anti-rebound bar.


1. Attach the anti-rebound bar to the front of the car seat. First unsnap the seat pad from the side of the armrest. Then locate the attachment slots, you may have to spread the fabric apart with your fingers to see them clearly.



2. Insert the anti-rebound bar into the car seat.




3. Make sure the bar is not being installed upside-down. The text "THIS SIDE UP" should be read to ensure correct orientation.





4. The anti-rebound bar is secure when it clicks into place on both sides. Pull on each side of the bar to make sure it is securely attached.
Snap the seat pad fabric back onto the side of the armrest.


⚠ WARNING! The anti-rebound bar should only be used Rear-Facing. Remove the anti-rebound bar when using this car seat Forward-Facing. To remove the anti-rebound bar from the car seat. First, push the release buttons marked with the label on both sides of the car seat. Then pull the anti-rebound bar out of the car seat.



5. Place the seat in one of the two rear-facing recline positions.

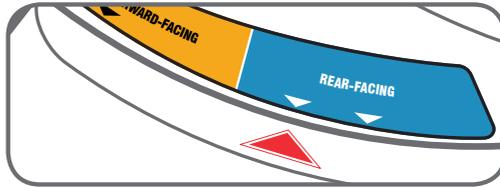


6. Store top tether hook as shown. Attach the LATCH connectors to plastic bar on the front of the seat as shown. Remove the slack from both straps.

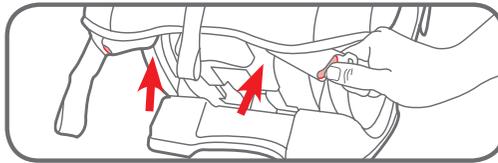


7. Place car seat rear-facing in back seat of the vehicle. Place the base flat on the vehicle seat. Push it back until the front of the car seat touches the vehicle seat back.



8. Check the Level Indicator. Vehicle **MUST** be on level ground. The bubble must be completely within the blue zone. Adjust the recline until the bubble is completely within the blue zone.

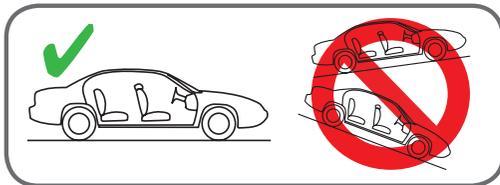





Review your vehicle's owner manual for vehicle seat belt use.

9. Thread vehicle seat belt through the Rear-Facing belt path (marked with a blue outlined label) and buckle it. The seat belt should lay as flat as possible and not be twisted.


Note: it may be easier to route the vehicle seat belt by lifting seat pad up to expose the belt path.




Make sure vehicle seat belt is in front of the buckle strap.



10. Lock the vehicle seat belt. In most vehicles today, slowly pull the shoulder belt all the way out and then let it go back in. You will hear a clicking sound. Slowly pull out on the belt and it should be locked. If not, review your car's owner manual and page 13





11. Tighten the vehicle seat belt. Press down firmly in the center of the car seat. Pull on the shoulder belt to tighten while feeding the slack back in the retractor.



12. Test for tightness. Grab the sides of the seat where the vehicle seat belt is and slide the car seat side to side and front to back.
If the seat moves less than 1" (2.5 cm), it is tight enough.




13. Check the Level Indicator. Vehicle **MUST** be on level ground. The bubble must be completely within the blue zone. Adjust the recline until the bubble is completely within the blue zone.

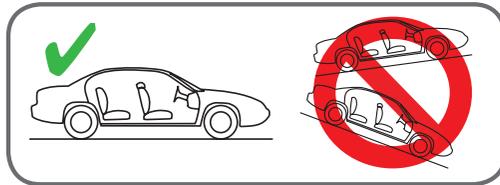

If needed, rolled towels may be placed under the car seat at the vehicle seat crease, until the bubble is completely in the blue zone.


See page 43 to secure your child.

FORWARD-FACING SAFE USE CHECKLIST



LATCH STRAP WITH
TOP TETHER STRAP

DO NOT INSTALL BY THIS
METHOD FOR A CHILD
WEIGHING MORE THAN
45 LB (20 KG)



VEHICLE LAP/SHOULDER
SEAT BELT WITH TOP
TETHER STRAP



VEHICLE LAP ONLY
SEAT BELT WITH TOP
TETHER STRAP


Forward-Facing:

22-65 lb (10-30 kg) and 49" (125 cm) or less. *

- Do **NOT** use the anti-rebound bar forward facing.
- Place the car seat forward-facing in the vehicle back seat.
- Make sure LATCH strap or vehicle seat belt is routed through the forward-facing belt path, marked with an orange label.
- Install this car seat tightly in your vehicle. Car seat **should not move** at the forward-facing belt path more than 1" (2.5 cm) from side to side and front to back.
- Attach and tighten top tether strap.
- Harness straps must be **at or just above** the top of child's shoulders and chest clip must be at **armpit level**.
- The AAP recommends that children ride rear-facing until the age of 2 or until they reach the maximum rear-facing height or weight rating for their seat, and when forward-facing, children should use the built-in harness system for as long as possible until they reach the maximum forward-facing weight or height for their car seat. This car seat can remain rear-facing up to 40 lb (18 kg) and forward-facing up to 65 lb (30 kg).
- **DO NOT** use the harness covers with a child weighing more than 40 lb (18 kg).


*Check your state laws and the AAP/NHTSA recommendations.

INSTALL FORWARD-FACING WITH LATCH STRAP




Review your vehicle's owner manual for LATCH location and use. Do not install by this method for a child weighing more than 45 lb (20 kg)

1. Remove the anti-rebound bar from the car seat. First, push the release buttons marked with the label on both sides of the car seat.




⚠ WARNING! The anti-rebound bar should only be used Rear-Facing. Remove the anti-rebound bar when using this car seat Forward-Facing.

2. Then pull the anti-rebound bar out of the car seat while continuing to push the release buttons.





Review your vehicle's owner manual for LATCH location and use.

3. Make sure LATCH strap is in the Forward-Facing belt path, marked with orange outlined label. If it is not, see page 49 to move the LATCH strap.






4. Place the seat in one of the two forward-facing recline positions.

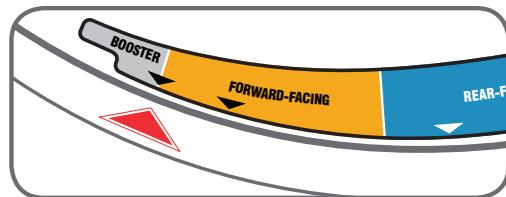





5. Remove LATCH connectors and top tether straps from storage locations. Push in on the red buttons on the LATCH connectors and remove from storage position. Unhook tether and lay it in the seat.

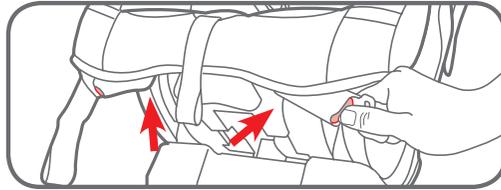



6. For easier installation, extend the LATCH strap to its maximum length by pressing the gray button and pulling out on the strap.




7. Place car seat Forward-Facing in back seat of the vehicle. Place the base flat on the vehicle seat. Push it back firmly until the back of the car seat touches the vehicle seat back. Center the car seat between the lower LATCH anchors.




8. Connect LATCH connectors to vehicle's lower LATCH anchors. LATCH strap should lay as flat as possible and not be twisted.

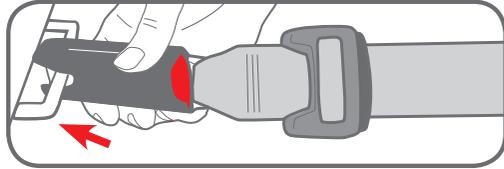


9. Tighten the LATCH strap. Press down firmly in the center of the car seat while tightening the LATCH strap.




Note: if you cannot get it tight, you may pull the tail of the LATCH strap through the belt path as shown and pull until completely tight.



10. Attach top tether strap. Extend the top tether by lifting up on the tether lock and attach. Consult vehicle's owner manual for specific location.






11. Tighten top tether strap. Remove all the slack.



12. Test for tightness. Grab the sides of the seat where the LATCH strap is and slide the car seat side to side and front to back. If the seat moves less than 1" (2.5 cm), it is tight enough.


See page 43 to secure your child.

INSTALL FORWARD-FACING WITH VEHICLE SEAT BELT




1. Remove the anti-rebound bar from the car seat. First, push the release buttons marked with the label on both sides of the car seat.



⚠ WARNING! The anti-rebound bar should only be used Rear-Facing. Remove the anti-rebound bar when using this car seat Forward-Facing.



2. Then pull the anti-rebound bar out of the car seat while continuing to push the release buttons.




3. Place the seat in one of the two forward-facing recline positions.

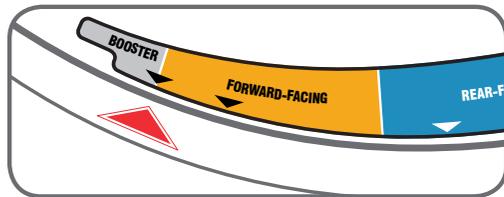



4. Store LATCH connectors. Attach the LATCH connectors to plastic bar on the front of the seat as shown and remove the slack from the strap.



5. Place car seat Forward-Facing in back seat of the vehicle. Place the base flat on the vehicle seat. Push it back firmly until the back of the car seat touches the vehicle seat back. Center the car seat between the lower LATCH anchors.




6. Unhook top tether strap from storage location and lay it in the seat

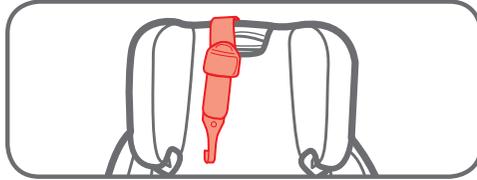


Review your vehicle's owner manual for vehicle seat belt use.


7. Thread vehicle seat belt through the Forward-Facing belt path (marked with an orange outlined label) and buckle it. The seat belt should lay as flat as possible and not be twisted.



8. Lock the vehicle seat belt. In most vehicles today, slowly pull the shoulder belt all the way out and then let it go back in. You will hear a clicking sound. Slowly pull out on the belt and it should be locked. If not, review your car's owner manual and page 13





9. Tighten the vehicle seat belt. Press down firmly in the center of the car seat. Pull on the shoulder belt to tighten while feeding the slack back in the retractor.



10. Attach top tether strap. Extend the top tether by lifting up on the tether lock and attach.

Consult vehicle's owner manual for specific location.



11. Tighten top tether strap. Remove all the slack.



12. Test for tightness. Grab the sides of the seat where the forward-facing belt path is and slide the car seat side to side and front to back. If the seat moves less than 1" (2.5 cm), it is tight enough.

See page 43 to secure your child.

BOOSTER SAFE USE CHECKLIST



VEHICLE LAP/SHOULDER SEAT BELT



NEVER USE A VEHICLE LAP ONLY SEAT BELT ACROSS FRONT OF CHILD.







Booster Use:



40-100 lb (18.1-45 kg), 43-57" (110.1-145 cm) and at least 4 years old

- Car seat must be forward-facing in the vehicle back seat.
- Vehicle seat belts **MUST** lay flat against child and **MUST NOT** be twisted.
- Make sure vehicle seat's lap belt is adjusted snugly, lays low on the child's hip, and is routed behind the armrest in the booster's belt path marked with a gray outlined label.
- Make sure vehicle seat's shoulder belt is centered between the child's neck and edge of shoulder.
- **Never** use a vehicle lap only seat belt across front of child.
- **DO NOT** position vehicle shoulder belt under the child's arm or back.
- **DO NOT** allow child to slouch or slide down in the booster seat.
- **DO NOT** position vehicle seat belt over top of armrests.
- Vehicle seat's headrest **SHOULD NOT** create a gap between vehicle seat and booster seat.
- The front of booster seat base **MUST NOT** hang over front of vehicle seat.
- If child will not keep the vehicle seat belt properly positioned, **DO NOT** use this booster seat. Use a different car seat.
- The AAP recommends that children should use a built-in harness system car seat for as long as possible until they reach the maximum forward-facing weight or height for their car seat. After reaching the maximum forward-facing weight or height, they also recommend that children 4 feet 9 inches (145 cm) tall or under should ride in a belt-positioning booster seat. This car seat can remain rear-facing up to 40 lb (18 kg) and forward-facing with the built-in harness system up to 65 lb (30 kg).


BOOSTER INSTALL




1. Store the harness. Loosen the harness straps as much as possible. (A)
 Raise the headrest to the highest position. (B)
 Unbuckle the chest clip and the buckle. (C and D)

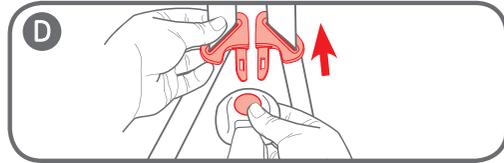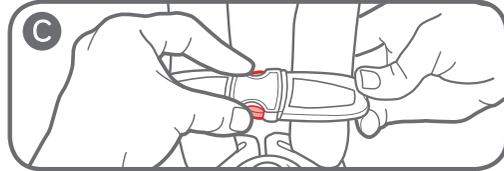


- Remove the lower seat pad to expose the harness storage door (E, F and G)

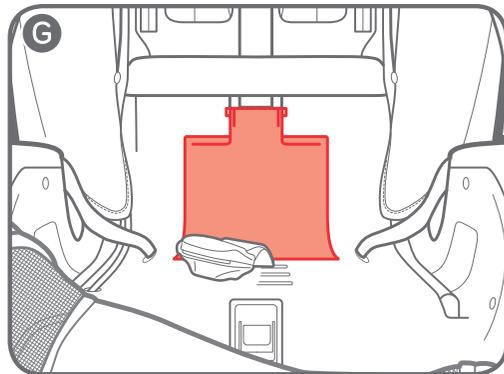





Detach the buckle from the car seat shell. Recline the car seat and locate the metal retainer.



Rotate the metal retainer up through the shell. From the front, pull out the buckle.





Open the harness storage door and place harness, chest clip, buckle, and buckle tongues inside storage compartment. Close the door



Replace seat pad. Move the headrest back to its proper position for your child.




2. Place the seat upright in the booster recline position.

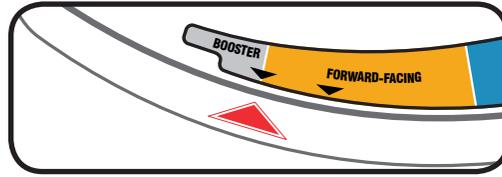

Baby Jogger allows the securing of the car seat with LATCH in the booster mode. The child still **MUST BE SECURED** with the vehicle lap/shoulder seat belt. LATCH can be used in the booster mode regardless of the weight of the child up to 100 lb (45 kg). Verify the following before using LATCH in the booster mode:

- The LATCH connectors **DO NOT** interfere with any vehicle seat belts or buckles.




If the LATCH interferes with the vehicle seat belts or if the chosen seating position does not have LATCH, you **MUST** store top tether strap as shown (A, B). Store the LATCH strap by attaching the connectors to the plastic bar as shown.




3. Place the booster seat Forward-Facing in the back seat of vehicle. Place Forward-Facing on a vehicle seat that has a lap/shoulder seat belt. The base should sit as flat as possible on the vehicle seat.



Skip to Step 10 if Not Using LATCH





4. Make sure LATCH strap is in the Forward-Facing belt path, marked with orange outlined label. If it is not, see page 49 to move the LATCH strap.




5. Unhook top tether strap from storage location and lay it in the seat

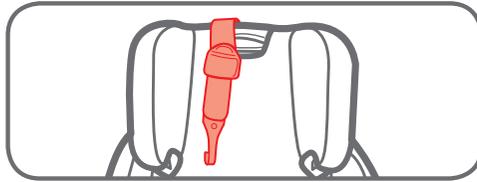



6. Connect LATCH connectors to vehicle's lower LATCH anchors. LATCH strap should not be twisted.

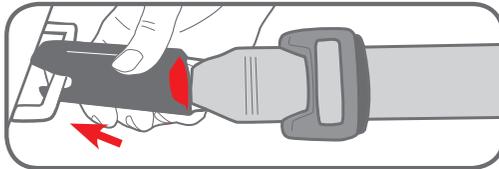


7. Remove all the slack out of the LATCH strap.



8. Attach top tether strap. Extend the top tether by lifting up on the tether lock and attach. Consult vehicle's owner manual for specific location.




9. Remove all of the slack out of the top tether.






10. Thread the vehicle shoulder belt through shoulder belt guide on the headrest.

See page 47 to secure your child.


SECURING CHILD WITH 5-POINT HARNESS




1. Loosen harness straps. Push down on the harness release lever while pulling out on the harness straps at the chest clip. (A) Unbuckle the chest clip (B) and the buckle (C). Place harness straps off to the sides.

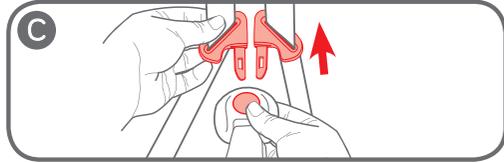

2. Place your child in the seat. Make sure their back is flat against the car seat back. Avoid bulky or heavy clothing when it is cold out. Doing so will prevent the harness straps from tightening properly. If needed, place a blanket over the child after you have secured them.




3. Place harness straps over child's shoulders and buckle the harness buckle. You will hear a "click" when buckle tongues are securely attached. Pull up on each buckle tongue to make sure it is securely attached.

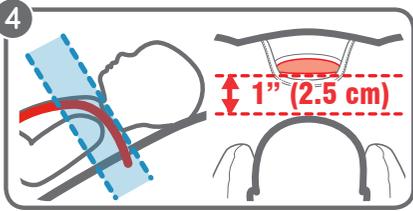


4. Be sure the harness straps are at the proper height.



Rear-facing: harness straps must be **at or just below** the child's shoulders and top of head **must be at least 1" (2.5 Cm) below** the headrest/harness adjustment handle.

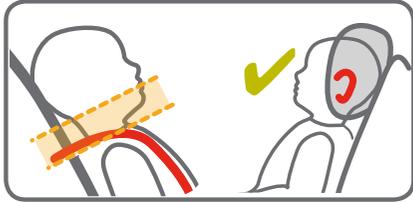

Forward-facing: harness straps must be **at or just above** the child's shoulders and top of child's ears must be **below** top of headrest.





To raise or lower headrest/harness height, squeeze the adjustment handle and move headrest for the proper harness height.

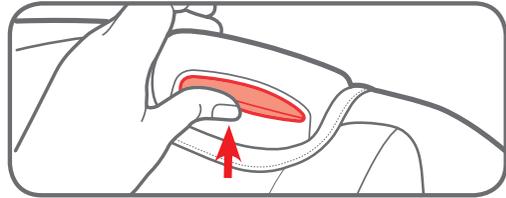



5. Check the buckle position. The correct slot is the one that is closest to your child without being underneath them.

To adjust, lift the lower seat pad from front of car seat to expose the buckle slots







Turn buckle strap sideways and slide to desired slot. Make sure buckle strap is in one of the three positions.

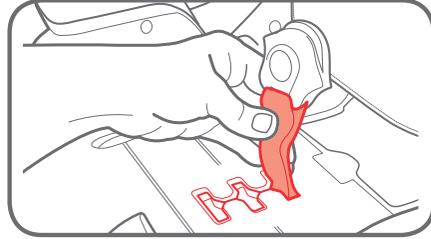


Make sure LATCH strap is in front of buckle strap




6. Replace seat pad, making sure the buckle goes through the same slot in the seat pad as in the plastic shell



7. Buckle the chest clip. You will hear a “click” when the chest clip is securely buckled.




8. Pull all the slack out from around the waist. Pull up on the harness strap while pushing the chest clip down. Do this to both sides.




9. Tighten the harness by pulling the harness adjustment strap. A snug harness should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.


When you are not able to pinch any of the harness webbing at your child's shoulder, the harness is tight enough.



10. Raise the chest clip to child's armpit level



11. Check tightness. Tighten more if needed.
 • **DO NOT** use the harness covers with a child weighing more than 40 lb (18 kg).

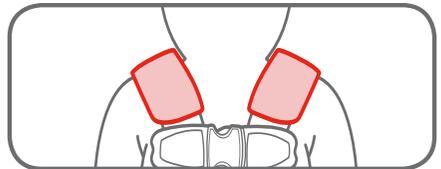


SECURING CHILD IN BOOSTER




⚠ WARNING! Use only the vehicle lap and shoulder belt system when restraining the child in the booster seat.


1. Place child in seat. Have your child sit in the booster seat, with their back flat against the back of the booster seat.




2. Thread vehicle's shoulder belt through booster shoulder belt guide in the headrest




3. Buckle the vehicle lap/shoulder seat belt. Be sure the lap portion of the vehicle seat belt goes behind the armrests on both sides. Both the lap and shoulder belt must lay in the booster belt path on the buckle side of the seat.

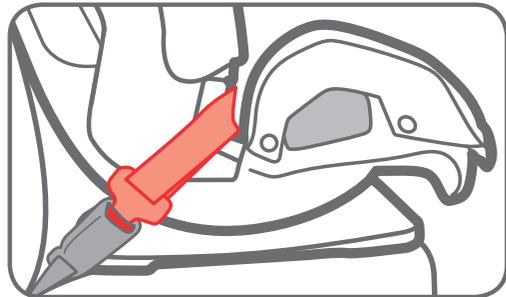



4. Pull up on the shoulder belt to tighten the lap and shoulder belt around the child. Be sure the lap portion of the vehicle seat belt is low across your child's hips.







5. Vehicle seat's shoulder belt should be centered between the child's neck and edge of shoulder.

Raise or lower the headrest to change the shoulder belt location on the child.

MOVING THE LATCH STRAP




1. For ease of moving the LATCH strap:


- A. Loosen the harness straps.
- B. Raise the headrest to the highest position.
- C. Unbuckle the chest clip.
- D. Unbuckle the buckle.

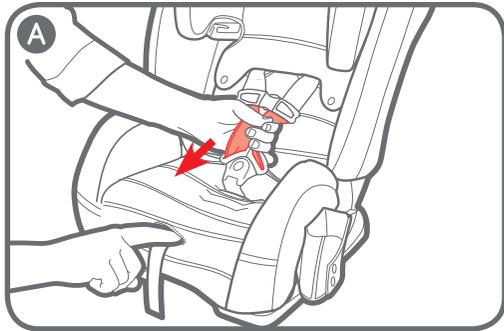


2. Remove the lower seat pad to expose the LATCH strap.

Note the orange and blue labels at the top and bottom of the red bar (E).

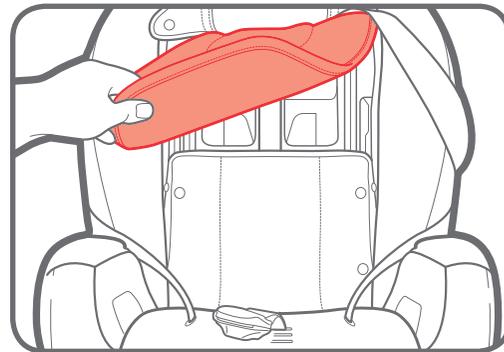



3. Pull LATCH connectors out of the belt path openings into the center of the car seat




4. Slide entire LATCH strap along the red bar to the desired belt path opening



Rear-facing: slide LATCH strap down to the blue label at the bottom of the red bar.

Forward-facing: slide the LATCH strap up to the orange label at the top of the red bar.


5. Push the LATCH connectors out through the desired belt path openings on each side of car seat




Forward-Facing:
Make sure the LATCH strap is routed behind the harness strap, is flat, and is not twisted (A, B).




Rear-Facing:
Make sure the LATCH strap is in front of the buckle strap, is flat, and is not twisted (C, D).






6. Replace seat pad



7. Move the headrest to its proper position for your child

ACCESSORIES (on select models)




Harness Covers

Make sure that harness covers do not interfere with placement of the chest clip at armpit level.

- **DO NOT** use the harness covers with a child weighing more than 40 lb (18 kg).

To remove, undo the fastening strips and remove.




Body Support

Body support must be used if shoulders are below the lowest harness setting.

Never allow body support to bunch or fold behind child.


To remove, unbuckle the buckle and pull out the body support.




Head Support

To install, thread the head support straps through the headrest and use the fastening strips to connect the straps together.


To remove, undo the fastening strips and pull the straps out of the headrest.

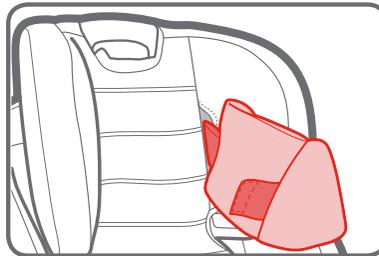



Cup Holder


Attach the cup holder by hooking the pin into the slot on the armrest. You may have to undo the snaps on the armrest cover, and move the cover aside to see the attachment slot. The cup holder may be attached to either side of the car seat.



Anti-Rebound Bar

Note: It is optional to use the anti-rebound bar when the car seat is used rear-facing. **NEVER** use the anti-rebound bar when the car seat is used forward-facing.

CLEANING SEAT PAD




Clean the seat pad with a damp sponge using mild soap and cool water. Refer to seat pad care tag for washing instructions.

Headrest Pad

If needed, headrest pad may be removed for cleaning.


To remove, unsnap the pad to pull the harness straps out.



Pull the plastic tab out of the slots just below the adjustment handle.

Remove the elastic straps from the hooks on both sides of the headrest.



Undo the two snaps behind the headrest.




Pull pad off of headrest.

Machine wash cover in cold water on delicate cycle and drip-dry. DO NOT USE BLEACH.

Reverse the steps to reattach the cover on the headrest.





Lower Seat Pad

If needed, lower seat pad may be removed for cleaning.

To remove, unsnap lower seat pad from side pad.

Undo the two snaps on both armrests.


Pull the four button clips out of lower front edge of car seat shell.


Pull the pad off.



Machine wash cover in cold water on delicate cycle and drip-dry.
DO NOT USE BLEACH.

Reverse the steps to reattach the bottom seat pad. Place front of the plastic shell in the pocket in the pad.





Side Pad


If needed, side pad may be removed for cleaning.

To remove, lower headrest and unsnap the pad from back.

Pull the plastic tabs out from the back and sides of the seat.


Remove the elastic straps from the hooks in the forward-facing belt path.

Pull the pad off.



Machine wash cover in cold water on delicate cycle and drip-dry. DO NOT USE BLEACH.

Reverse the steps to reattach the bottom seat pad. Place the corner of the sidewing in the pocket at the bottom of the side pad.



CARE AND MAINTENANCE

Cleaning the Seat Pad:

Refer to the care tag on your seat pad for washing instructions. NEVER use carrier without the seat pad attached.

Cleaning the Shell:

Spot clean using warm water and mild soap. Do not use any other cleaning agents or bleach.



Cleaning the Harness Straps:

Spot clean with mild soap and damp cloth. DO NOT SOAK straps in water as this may weaken them.

Cleaning the Buckle:

Remove Buckle to Clean

Recline the car seat and locate the metal retainer. Rotate the metal retainer up through the shell and pad. From the front, pull out the buckle.

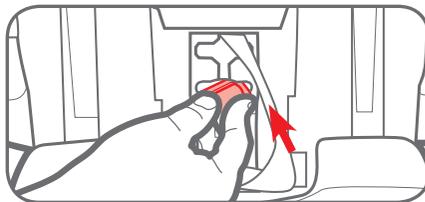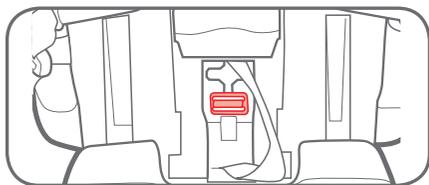


To clean, place in a cup of warm water and gently agitate the buckle. Press the red button several times while in the water.

DO NOT SUBMERGE THE BUCKLE STRAP. DO NOT USE SOAPS, HOUSEHOLD DETERGENTS or LUBRICANTS.

Shake out excess water and allow to air dry. Repeat steps as needed until it fastens with a click. Re-insert the buckle into the same slot it was removed. Pull up on crotch buckle to make sure it is secured.

WARNING! Inspect and clean buckle from time to time to remove any objects or debris that could prevent latching.



CLEANING HARNESS AND LATCH STRAPS

Surface wash only with mild soap and damp cloth. **DO NOT IMMERSE THE HARNESS STRAPS or LATCH STRAP IN WATER** Doing so may weaken the straps.

If harness straps or LATCH belt are frayed or heavily soiled, contact Customer Service at www.babyjogger.com or 1-800-241-1848.

LIMITED WARRANTY

This product is warranted against defective materials or workmanship for one year from the date of original purchase. Proof of purchase is required.

The warranty does not include:

- Normal wear and tear
- Corrosion or rust
- Incorrect assembly or the installation of third party parts or accessories not compatible with the original design.
- Accidental or intentional damage, abuse, or neglect.
- Commercial Use
- Improper storage/care of the unit

This warranty specifically excludes claims for indirect, incidental, or consequential damages. The implied warranties of merchantability and fitness for a particular purpose is according to the specific warranty period for this model unit at time of purchase.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. To know what your legal rights are in your state, consult your local or state consumer affairs office or your state's Attorney General.

Note: When contacting Baby Jogger regarding your product, please have the serial number and manufacturing date ready. It can be found on the back of the car seat.

Consumer Care Contact Information:

Email: customerservice@babyjogger.com
Call: 1-800-241-1848
between 8:30am-5:30pm EST.Mon-Fri
Mail: Baby Jogger, LLC
4110 Premier Drive
High Point, NC 27265

Notes:

REPLACEMENT PARTS

To purchase parts or accessories in the United States,
please contact us at the following:


www.babyjogger.com

or

1-800-241-1848



Store instruction manual in
the slot with the instruction
book icon as shown.

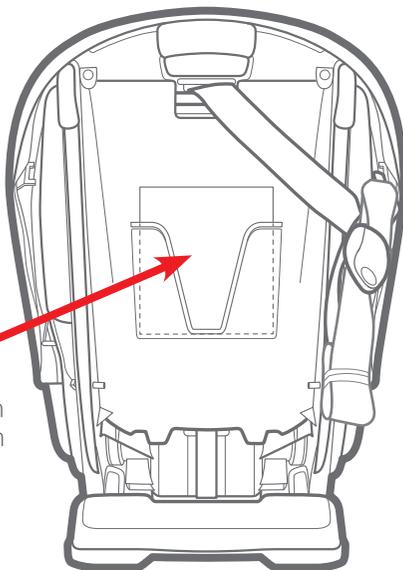

baby jogger®

Baby Jogger, LLC

A BRANDS newell Company

6655 Peachtree-Dunwoody Rd. NE • Atlanta, GA 30328

www.babyjogger.com