



MyRide ® Buckle Replacement Guide

©2013 Graco PD245610A 5/13

To Remove Existing Harness Tongues and Buckle and Attach Replacement Buckle













Remove chest clip. DO NOT DISCARD the chest clip.



Unbuckle harness by tilting top of buckle down, press top of red button, and pull tongues out of buckle.



Remove and discard tongues.



Slide NEW buckle onto harness straps. MAKE sure not to twist straps.



Re-attach chest clip. MAKE sure not to twist straps.



Re-insert straps through slots in seat pad and seat back.
See carseat owner's manual for inserting the straps into the correct set of harness slots for your child.




Insert harness straps behind harness cover plate.





Re-insert straps back onto splitter plate.
See carseat owner's manual for inserting the splitter plate into the correct set of loops for your child.


Turn page over to finish the rest of the assembly Steps 12 to 20 for the buckle replacement.




Unfasten the 4 clips at the front of the seat pad. Pull pad up then pull buckle through crotch slot.













Re-insert buckle through the slot in seat pad.





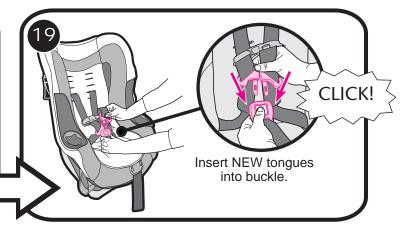



FINAL CHECK:

- Tug on the buckle to be sure it is properly secured in the bottom of the seat and does not come out.
- MAKE SURE the harness straps are not twisted.
- Make sure the chest clip is properly threaded as shown in Step 8.

Any questions please contact us at :

Graco Children's Products 3 Glenlake Parkway Atlanta, GA 30328 1-800-345-4109 www.gracobaby.com