

LG Styler® Smart Steam Closet with Dual TrueSteam® Technology and Dynamic MovingHanger™

- Dual TrueSteam® Technology
- QuickRefresh™
- Dynamic MovingHanger™
- Plug & Go Design
- Dual Inverter HeatPump™
- AutoFresh System™

AVAILABLE COLORS



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

MATERIAL & FINISH

|                   |                       |
|-------------------|-----------------------|
| Door Color        | Beige                 |
| Door Type         | PCM                   |
| Styler Body Color | Texture Western Black |

CONTROL & DISPLAY

|                  |                                  |
|------------------|----------------------------------|
| Display Type     | Full Touch Buttons & LED Display |
| Figure Indicator | 18:88                            |
| Delay Timer      | 3-19 Hours                       |

FEATURES

|                              |                                        |
|------------------------------|----------------------------------------|
| Drying Type                  | Ventless with Inverter HeatPump System |
| True Steam                   | Yes (Dual TrueSteam)                   |
| Moving Hanger                | Yes                                    |
| Max RPM of Moving Hanger     | 350                                    |
| Pants Crease Care            | Yes                                    |
| Dehumidification             | Yes                                    |
| Reversible Door              | Yes                                    |
| Aroma Kit                    | Yes                                    |
| Versatile Shelf              | Yes                                    |
| End of Cycle Signal          | Yes                                    |
| Interior Light               | Yes (1)                                |
| Empty Water Indicator        | Yes                                    |
| Fill Water Indicator         | Yes                                    |
| Built-In Handy Turbo Steamer | No                                     |
| Auto Ventilation System      | Yes                                    |

PROGRAMS

|                |                        |
|----------------|------------------------|
| Download Cycle | Yes                    |
| Gentle Dry     | Normal / Time Dry      |
| Refresh        | Light / Normal / Heavy |
| Sanitary       | Normal / Heavy Duty    |

DOWNLOADABLE PROGRAMS

|                |                                                              |
|----------------|--------------------------------------------------------------|
| Sanitize       | Baby Clothes, Bedding/ Pillow, Doll, Suit, School Uniform    |
| Styling        | Fur/ Leather, Jeans, Old Clothes, Padded Coat, Pants, Scarf, |
| Dry            | Rain / Snow<br>Swimsuite, Wool / Knitwear, Yoga Outfit       |
| Refresh        | Wet                                                          |
| Warm Blankets  | Yes                                                          |
| Static Removal | Yes                                                          |



ADDITIONAL OPTIONS

|              |     |
|--------------|-----|
| Night Care   | Yes |
| Delay Start  | Yes |
| Control Lock | Yes |

SMART FEATURES (ThinQ® TECHNOLOGY)

|                                  |     |
|----------------------------------|-----|
| ThinQ (Wi-Fi)                    | Yes |
| Remote Start and Cycle Monitor   | Yes |
| Download Cycle                   | Yes |
| Smart Diagnosis                  | Yes |
| Energy Monitoring                | Yes |
| Voice Control (3rd Party Device) | No  |

POWER SOURCE

|                         |                   |
|-------------------------|-------------------|
| Electrical Requirements | 120V, 60Hz, 12.5A |
| Plug                    | Included          |
| Plug Type               | 3 Prong           |

DIMENSIONS & WEIGHTS

|                                  |                             |
|----------------------------------|-----------------------------|
| Dimensions (WxHxD)               | 23 5/8" x 77 3/8" x 24 3/8" |
| Product Depth with door open 90° | 46 7/8"                     |
| Carton Dimensions (WxHxD)        | 28 1/4" x 80 3/4" x 27 5/8" |
| Weight                           | 187.4 lbs                   |
| Carton Weight                    | 207.2 lbs                   |


OPTIONS & ACCESSORIES

|                      |    |
|----------------------|----|
| Regular Hanger (Qty) | 5  |
| Pants Hanger (Qty)   | No |
| Shelf (Qty)          | 1  |
| Drip Tray            | 1  |
| Anti-Tip Kit (Qty)   | No |
| Rear Leveling Feet   | 2  |
| Carpet Install Spike | 4  |

UPC CODE

|          |              |
|----------|--------------|
| SC5MAR4G | 195174136089 |
|----------|--------------|

DIMENSION / CLEARANCES

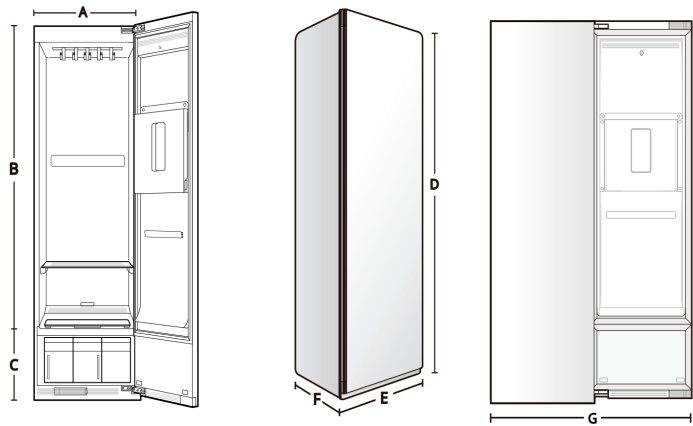


| DIMENSIONS | in     | mm   |
|------------|--------|------|
| A          | 21     | 535  |
| B          | 61 3/4 | 1570 |
| C          | 15 1/2 | 395  |
| D          | 77 3/8 | 1965 |
| E          | 23 5/8 | 600  |
| F          | 24 3/8 | 620  |
| G          | 46 7/8 | 1190 |

DIMENSION / CLEARANCES

RECOMMENDED INSTALLATION SPACING

The following clearances are recommended for the appliance. Although the appliance has been tested for clearances of 1 3/16 in. (3 cm) on the sides and rear, recommended clearances should be considered for the following reasons:


- 1 Allow at least 24in. (61cm) in front to open the door.
- 2 Allow at least 2in. (5cm) on both sides and between the back of the appliance and the wall.
- 3 Allow at least 7 3/4 in. (20cm) between the top of the appliance and any overhanging shelves or cabinets.

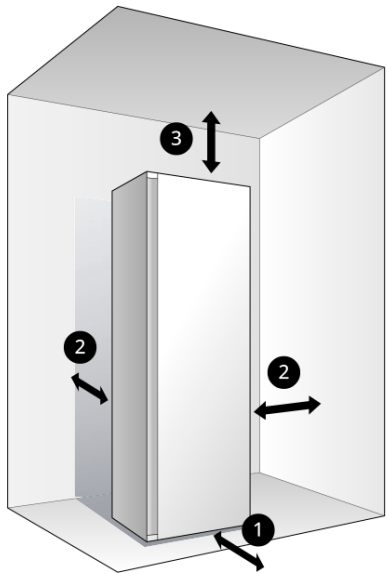

DIMENSION / CLEARANCES

SPACING FOR RECESSED AREA OR CLOSET INSTALLATION

There should be at least a little space around the appliance (or any other appliance) to avoid contact with walls, furniture, or other appliances during operation. Allow a minimum of 1 3/16 in. (3 cm) on all sides of the appliance to avoid increased noise or damage.

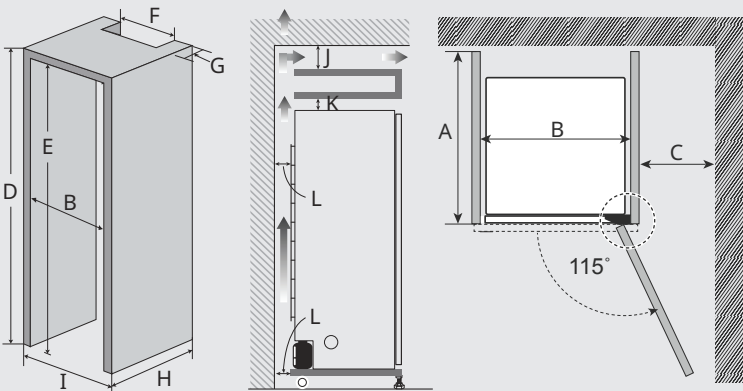


| DIMENSIONS | in         | mm     |
|------------|------------|--------|
| A          | ≥ 27 1/8   | ≥ 690  |
| B          | ≥ 26 3/8   | ≥ 670  |
| C          | ≥ 10       | ≥ 250  |
| D          | ≥ 78 7/8   | ≤ 2004 |
| E          | ≥ 78 3/8   | ≥ 1990 |
| F          | ≥ 21 13/16 | ≥ 555  |
| G          | ≥ 2        | ≥ 50   |
| H          | ≥ 26 3/8   | ≥ 670  |
| I          | ≥ 25 1/4   | ≥ 640  |
| J          | ≥ 2        | ≥ 50   |
| K          | ≥ 1        | ≥ 25   |
| L          | ≥ 2        | ≥ 50   |

DIMENSION / CLEARANCES

Closet Ventilation Requirement

Closets with doors must have both an upper and lower vent to prevent heat and moisture build-up in the closet.

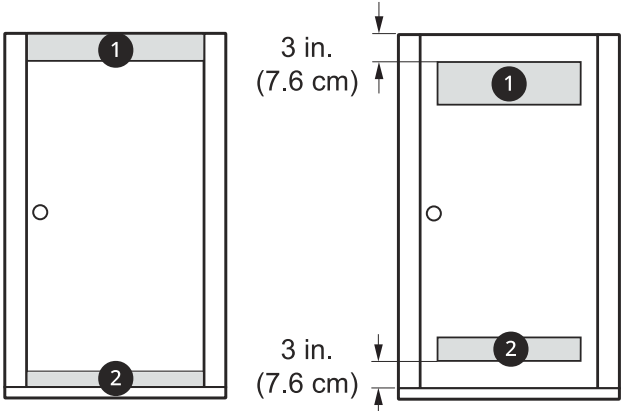

- 1 Upper vent opening with a minimum opening of 48 sq. in. (310 cm<sup>2</sup>) must be installed no lower than 6 ft. (185 cm) above the floor.
- 2 Lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor.