

Ultra impact in public, ultra collaboration in private

QM-D 85"/105" UHD LED LCD displays and embedded touch screen


Your customers expect the best. As do ours. Which is why we're introducing the Samsung QMD displays. Offering UHD 4K and 5K resolution in screen sizes of 85" and 105" respectively, they're for those who want to deliver big, bright, ultra-high resolution messages. For an interactive solution, the 85" QMD-BR interactive embedded touch screen adds collaboration to the boardroom or the classroom, with 10 touch points and 2 drawing points for a smooth, natural writing experience. Whether you use a QMD display in your retail establishment, your corporate boardroom or your public space, as a message board or a work board, there's never before existed this combination of commercial durability, UHD resolution and sheer impact.

CONTACT US:

1-866-SAM4BIZ samsung.com/business samsung.com/b2bdigitalsignage

FOLLOW US:

youtube.com/samsungbizusa



Key features



Stunning UHD picture

Ultra-high resolutions of 5120 x 2160 5K (QM105D) and 3840 x 2160 4K (QM85D and QM85D-BR) deliver life-like image quality. It's a high-impact way to communicate in retail spaces, hospitality, corporate boardrooms, healthcare environments and more.



Impactful 105" and 85" sizes

The QMD series features big, beautiful 105" and 85" UHD panels, for engaging images and messages that simply cannot be ignored. Imagine the possibilities



Interactive embedded touch screen

The QM85D-BR features IR touch functionality, for up to 10 simultaneous touch points and 2 simultaneous drawing points. The large format and natural writing experience makes it an ideal solution for collaborative work and learning environments.



Upscaling technology

Even if your content quality isn't the best, the QMD series upconverts low-resolution content to create the sharpest images possible.



Multi-screen delivers multiple messages

The Picture by Picture function allows you to display up to 4 content feeds at once, each supporting Full HD 1080p resolution. It's ideal for retail, videoconferencing and command control applications.



60 Hz (FPS) playback

DisplayPort 1.2 ports allow you to display full 60 Hz (FPS) content playback.



Portrait or landscape mode

The QM85D and QM85D-BR offer the ability to deliver your messages either vertically or horizontally.



16/7 operation, 3-year warranty

Designed specifically for long hours of reliable operation and protected by a 3-year warranty, Samsung QMD commercial displays deliver peace of mind.

Samsung QMD commercial UHD **LED LCD displays**








	QM85D-BR	QM85	5 D	QM105D
Display Screen Size	85"	85"		105"
Panel Technology	120Hz Slim Direct LED BLU	120Hz \$	Slim Direct LED BLU	120Hz Slim Direct LED BLU
Resolution	3840 x 2160 (16:9) 4K UHD	3840 x	2160 (16:9) 4K UHD	5120 x 2160 (21:9) 5K UHD
Brightness	430 nits (with Touch Glass)	500 nits	ts	500 nits
Contrast Ratio	5000:1	5000:1	(Typical)	4000:1 (Typical)
Viewing Angle (Horizontal/V	/ertical) 178°/178°	178°/17	78°	178°/178°
Orientation	Landscape / Portrait	Landsca	ape / Portrait	Landscape
Response Time (G-to-G)	6ms (Typical)	6ms (Ty	ypical)	8ms (Typical)
Connectivity Input	D-Sub, DVI-D, DisplayPort 1.2 (2), D	DisplayPort 1.1 (1), HDMI x3, USB D-Sub,	DVI-D, DisplayPort 1.2 (2), DisplayPort 1.1 (1), HDMl x3	D-Sub, DVI-D, DisplayPort 1.2 (2), DisplayPort 1.1 (1), HDMI x3
Output	Stereo Mini Jack	Stereo N	Mini Jack	Stereo Mini Jack
External Control	RS232C (in/out), RJ45	RS2320	C (in/out), RJ45	RS232C (in/out), RJ45
External Sensor	IR	IR		IR .
Sound Speaker Type	Built in Speaker (15W + 15W)	Built in S	Speaker (15W + 15W)	Built in Speaker (15W + 15W)
Power Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60	Hz AC 100	0 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption (Typica	al/Max) 375W / 495W	375W /	/ 495W	TBD
Power Consumption (Stand	dby) < 0.5W	< 0.5W	I	< 0.5W
Environmental Operating Temperature	0°C - 40°C	0°C - 40	10°C	0°C - 40°C
Conditions Operating Humidity	10%~80%	10%~8	30%	10%~80%
Features Special Hard	dware Temperature Sensor, Pivot Display, Cl Built in Speaker (15W 2ch)		rature Sensor, Clock Battery (80hrs Clock Keeping), Speaker (15W 2ch)	Temperature Sensor, Clock Battery (80hrs Clock Keeping), Built in Speaker (15W 2ch)
Soft	ware FHD 4 PBP Support (2/3/4 PBP), Auto Home UI, Button Lock, DDC CI, DHCP MDC, Hot key option, Plug&Play (initia	with RJ45 MDC Urgent Message by Home U	PBP Support (2/3/4 PBP), Auto Source Switching & Recovery, LFD JI, Remote F/W Update (MDC, MagicInfo Server) Button Lock, DDC CI, with RJ45 MDC Urgent Message by MDC, Hot Key Option, Plug&Play setting)	FHD 4 PBP Support (2/3/4 PBP), Auto Source Switching & Recovery, L Home UI, Button Lock, DDC CI, DHCP with RJ45 MDC Urgent Message MDC, Hot Key Option, Plug&Play (Initial Setting)
VESA Standard Wall Mount	t Interface 600 x 400mm	600 x 4	100mm	1600 x 600mm
Dimensions Product Dimensions (without	ut stand) 76.7" x 44.5" x 3.7"	74.9" x	< 42.9" x 4.1"	98" x 42.3" x 4.1"
Packaging Dimensions	82.5" x 51.7" x 20.6"	80.7" x	< 49.8" x 18.6"	106.3" x 53.5" x 31.5"
Bezel Width	39.9mm	13.2 (Tr	Top/Side) / 19.3 (Bottom)	19.1mm
Weight Product Weight	183 lbs.	122.4 lt	lbs.	239.9 lbs.
Shipping Weight	218.3 lbs.	157.4 lt	lbs.	347.7 lbs.
Service Standard Warranty	3 Years On-Site (Parts / Labor / Bac	cklight) 3 Years	s On-Site (Parts / Labor / Backlight)	3 Years On-Site (Parts / Labor / Backlight)
Accessories Included	Quick Setup Guide, Warranty Card, I Remote Controller, Batteries		Setup Guide, Warranty Card, DP Cable, Power Cord, e Controller, Batteries	Quick Setup Guide, Warranty Card, DP Cable, Power Cord, Remote Controller, Batteries, Stand
Optional Mount	WMN8200SD	WMN57	770D	WMN1050SD
Optional Stand	STN-L7585F	STN-L7	7585F	Included
Optional Media Player	SBB-DI, SBB-DA	SBB-DA	A, SBB-DI, SBB-B32D	SBB-DA, SBB-DI, SBB-B32D
Green Emission Standard	EMC Class A	EMC Cla	ass A	EMC Class A
Management ENERGY STAR® 6.0 Compli	liant Yes	Yes		Yes
RoHS Compliant	Compliant Yes			Yes
Packaging Recyclability	Packing Materials Recyclable	Packing	Materials Recyclable	Packing Materials Recyclable
Management ENERGY STAR® 6.0 Compliant	iant	Yes Yes	Yes Yes Yes	Yes Yes Yes

1. IR/Ambient Sensor In 10. IR Out 2. HDMI in 3 11. RS232C Out 3. HDMI in 2 12. RS232C In 4. HDMI in 1 13. USB 14. VGA In

5. DisplayPort 1.1 (UHD 30Hz) 15. Audio Out 6. DisplayPort 1.2 16. Audio In (UHD 60Hz)

7. DisplayPort 1.2 (UHD 60Hz) 8. DVI In 9. RJ45

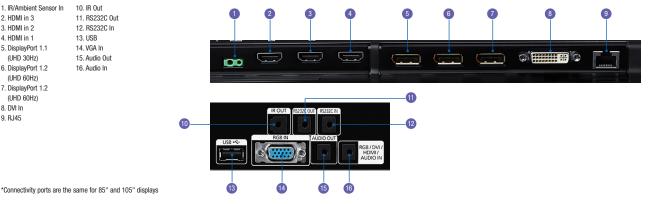

Learn more samsung.com/business or www.samsung.com/b2bdigitalsignage

Product support Follow us

1-800-SAMSUNG 1-866-SAM4BIZ

SAMSUNG BUSINESS

ENERGY STAR

