



# 12'W x 20'L x 10'H Run-in-Shed Assembly Instructions

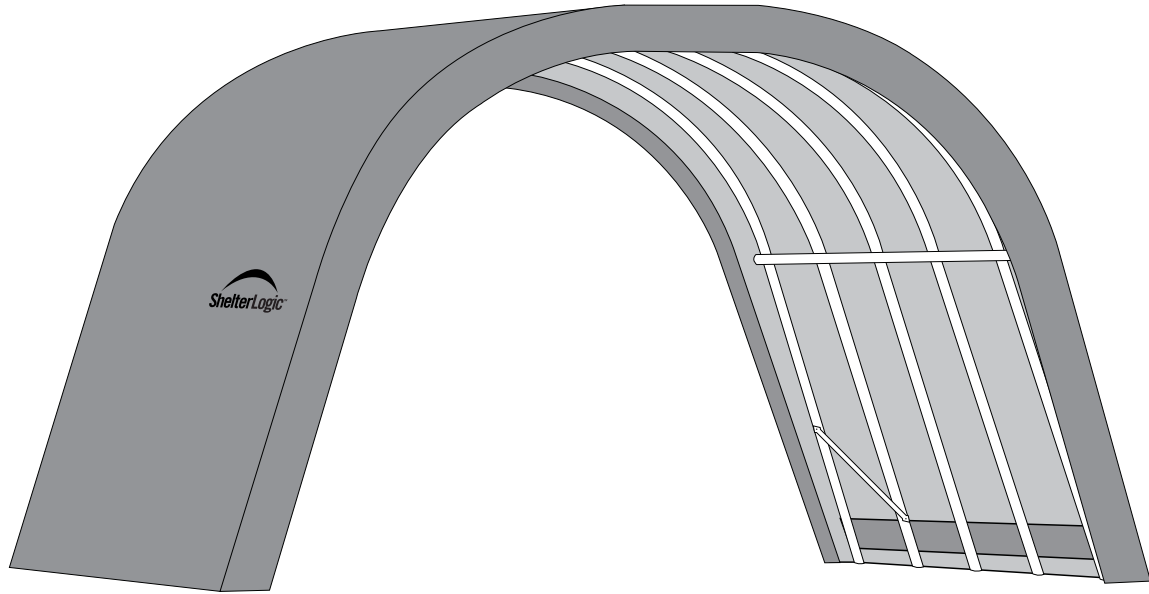

DESCRIPTION	MODEL #
12'W x 20'L x 10'H Run-In-Shed	51351

## RECOMMENDED TOOLS

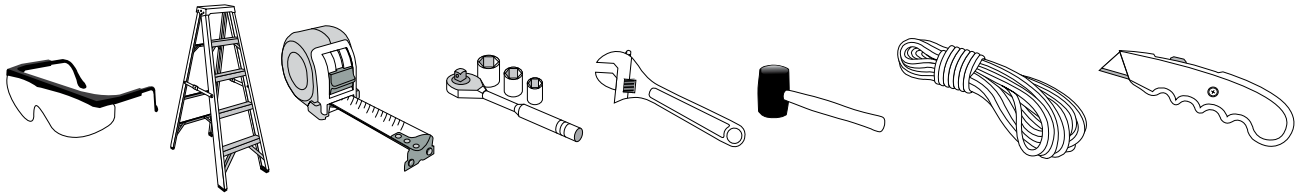

Please read instructions **COMPLETELY** before assembly. This shelter **MUST** be securely anchored. **THIS IS A TEMPORARY STRUCTURE AND NOT RECOMMENDED AS A PERMANENT STRUCTURE.**

Before you start: 2+ individual recommended for assembly, approximate time 2.5 hrs.

  
**ShelterLogic**<sup>®</sup>  
 150 Callender Road  
 Watertown, CT 06795  
[www.shelterlogic.com](http://www.shelterlogic.com)

**VIEW AN ONLINE INSTRUCTIONAL  
 VIDEO OF A GARAGE BEING BUILT!**  
[www.ShelterLogic.com](http://www.ShelterLogic.com)

**1-800-524-9970**


Canada:  
**1-800-559-6175**

## ATTENTION:

This shelter product is manufactured with quality materials. It is designed to fit the **ShelterLogic®**, LLC custom fabric cover included. **ShelterLogic®**, LLC Shelters offer storage and protection from damage caused by sun, light rain, tree sap, animal - bird excrement and light snow. Please anchor this **ShelterLogic®**, LLC structure properly. See manual for more anchoring details. Proper anchoring, keeping cover tight and free of snow and debris is the responsibility of the consumer. Please read and understand the installation detail, warnings and cautions prior to beginning installation. If you have any questions call the customer service number listed below. Please refer to the warranty card inside this package.

## DANGER:

Prior to installation, consult with all local municipal codes regarding installation of temporary shelters. Choose the location of your shelter carefully. **DANGER: Keep away from electrical wires.** Check for overhead utility lines, tree branches or other structures. Check for underground pipes or wires before you dig. DO NOT install near roof lines or other structures that could shed snow, ice or excessive run off onto your shelter. DO NOT hang objects from the roof or support cables.

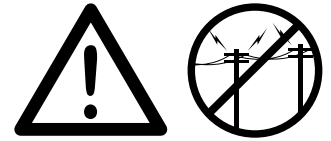

## WARNING:

Risk of fire. DO NOT smoke or use open flame devices (including grills, fire pits, deep fryers, smokers or lanterns) in or around the shelter. DO NOT store flammable liquids (gasoline, kerosene, propane, etc.) in or around your shelter. Do not expose top or sides of the shelter to open fire or other flame source.



## CAUTION:

Use **CAUTION** when erecting the frame. Use safety goggles during installation. Secure and bolt together overhead poles during assembly. Beware of pole ends.

## PROPER ANCHORING AND INSTALLATION OF FRAME:

### PROPER ANCHORING OF THE FRAME IS THE RESPONSIBILITY OF THE CONSUMER.

**ShelterLogic®**, LLC is not responsible for damage to the unit or the contents from acts of nature. Any shelter that is not anchored securely has the potential to fly away causing damage, and is not covered under the warranty. Periodically check the anchors to ensure stability of shelter. **ShelterLogic®**, LLC cannot be responsible for any shelter that blows away. **NOTE:** *Your shelter's cover can be quickly removed and stored prior to severe weather conditions.* If strong winds or severe weather is forecast in your area, we recommend removal of cover.

## REPLACEMENT PARTS, ASSEMBLY, SPECIAL ORDERS:

Genuine **ShelterLogic®**, LLC replacement parts and accessories are available from the factory, including anchoring kits for nearly any application, replacement covers, wall and enclosure kits, vent and light kits, frame parts, zippered doors and other accessories. All items are shipped factory direct to your door.


## QUESTIONS - CLAIMS - SPECIAL ORDERS? CALL OUR CUSTOMER SERVICE HOTLINE:

U.S. CUSTOMER SERVICE: 1-800-524-9970 INTERNATIONAL CUSTOMER SERVICE: 001-860-945-6442 CANADA CUSTOMER SERVICE: 1-800-559-6175

HOURS OF OPERATION: MON-FRI 8:30AM-8:00PM EST, SAT-SUN 8:30AM-5:00PM EST.

## CARE AND CLEANING:

A tight cover ensures longer life and performance. Always maintain a tight cover. Loose fabric can accelerate deterioration of cover fabric. Immediately remove any accumulated snow or ice from the roof structure with a broom, mop or other soft-sided instrument. Use extreme caution when removing snow from cover- always remove from outside the structure. DO NOT use hard-edged tools or instruments like rakes or shovels to remove snow. This could result in punctures to the cover. DO NOT use bleach or harsh abrasive products to clean the fabric cover. Cover is easily cleaned with mild soap and water.
























## WARRANTY:

This shelter carries a full limited warranty against defects in workmanship. **ShelterLogic®**, LLC warrants to the Original Purchaser that if properly used and installed, the product and all associated parts, are free from manufacturer's defects for a period of:

### 1 YEAR FOR COVER FABRIC, END PANELS AND FRAMEWORK

Warranty period is determined by date of shipment from **ShelterLogic®**, LLC for factory direct purchases or date of purchase from an authorized reseller, (please save a copy of your purchase receipt). If this product or any associated parts are found to be defective or missing at the time of receipt, **ShelterLogic®**, LLC will repair or replace, at it's option, the defective parts at no charge to the original purchaser. Replacement parts or repaired parts shall be covered for the remainder of the Original Limited Warranty Period. All shipping costs will be the responsibility of the customer. Parts and replacements will be sent C.O.D. You must save the original packaging materials for shipment back. If you purchased from a local dealer, all claims must have a copy of original receipt. After purchase, please fill out and return warranty card for product registration. Please see warranty card for more details.


# 12' x 20' x 10' Run-In Shed® - Parts List - Model #51351

Description of Parts:	Quantity	Part #
 Cover Cross Rail 45 3/4"	10	10110
 Cross Rail 48 1/2"	3	02031
 Cross Rail, Swedge 50 1/2"	12	02030
 Middle Upright Tube 56"	8	10273
 Wind Brace (Flat Ends) 55 1/2"	4	10205
 Bent Corner Leg	4	10226
 Side Bend Plain 80"	6	10225
 Side Bend Swedged 80"	6	10224
 Extension 27"	12	10223
 Cover	1	11277
 ShelterLock™ Stabilizer Block	12	800260
 Ratchet Clamp	8	10240
 Half-Clamps for Middle Legs	16	10111
 Half-Clamps for Corner Legs	8	10112
 Bolts 1/4" x 3" (For Cross Rail)	14	10210
 Round Head Bolts 1/4" x 3" (Top)	4	802630
 Bolts 1/4" x 2" (For Frame)	40	10114
 Bolts 1/4" x 1 5/8" (For Clamps)	20	10115
 Nut 1/4"	78	01010
 Base Feet	8	10270
 15" Auger Anchors (Temporary) Cable - 1' Length Cable Clamps	4	10014 10015 10016

# RUN-IN-SHED ASSEMBLY MANUAL

Please read instructions completely before assembly

## FRAME ASSEMBLY OVERVIEW

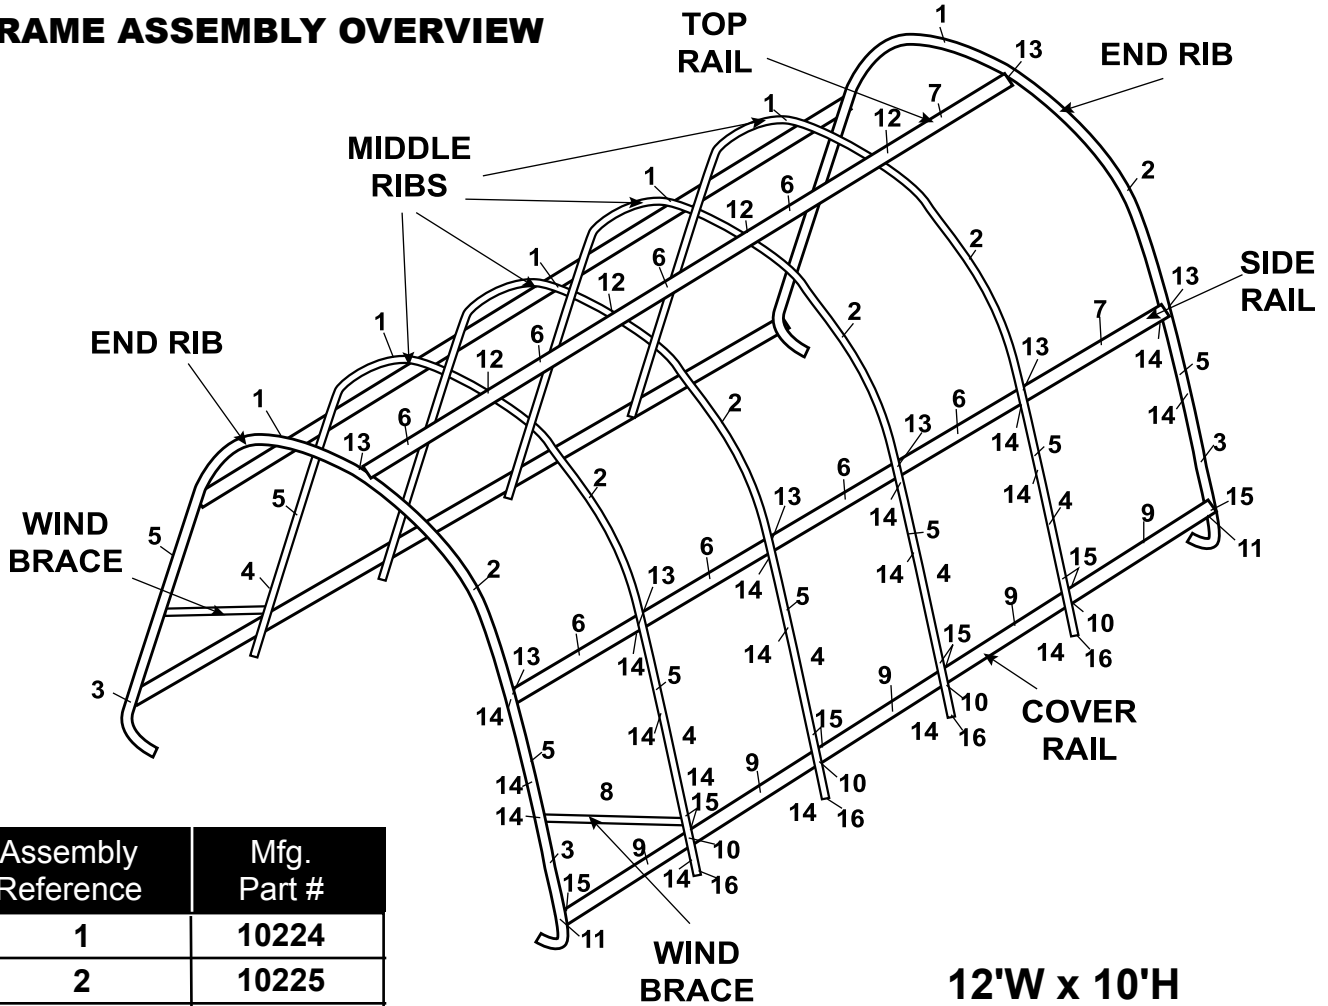


Assembly Reference	Mfg. Part #
1	10224
2	10225
3	10226
4	10273
5	10223
6	02030
7	02031
8	10205
9	10110
10	10111
11	10112
12	00669
13	10210
14	10114
15	10115
16	10270
17	800260

**12'W x 10'H**


  
**ShelterLogic®**  
 150 Callender Road  
 Watertown, CT 06795  
[www.shelterlogic.com](http://www.shelterlogic.com)

# 1. ASSEMBLE END RIB

Secure all bolts with 1/4" Nuts (01010)

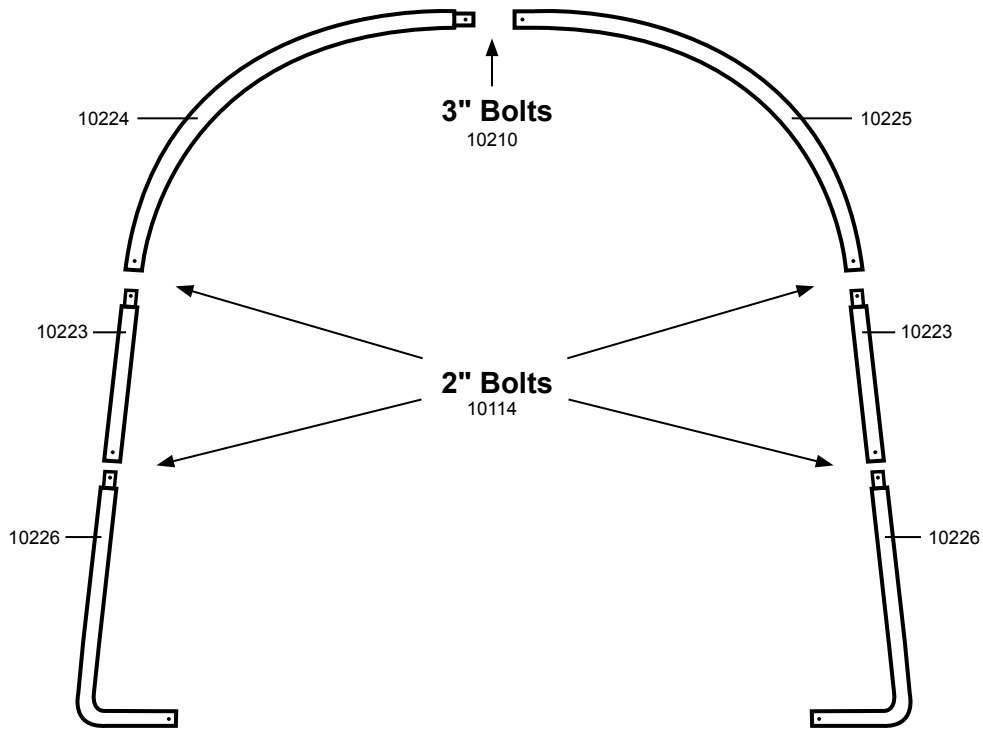


# 2. ASSEMBLE MIDDLE RIBS

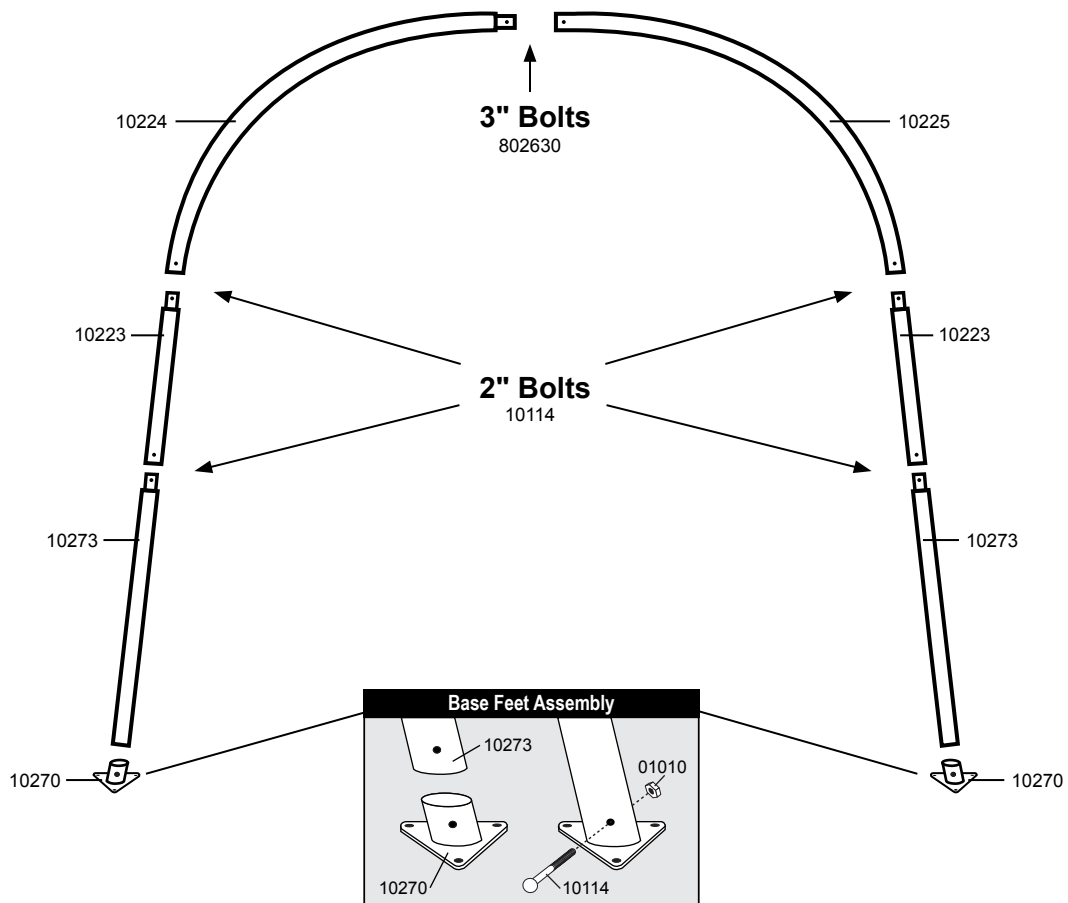


### 3. ATTACH CROSS RAILS AND WIND BRACES

Repeat until all ribs are assembled and securely connected.

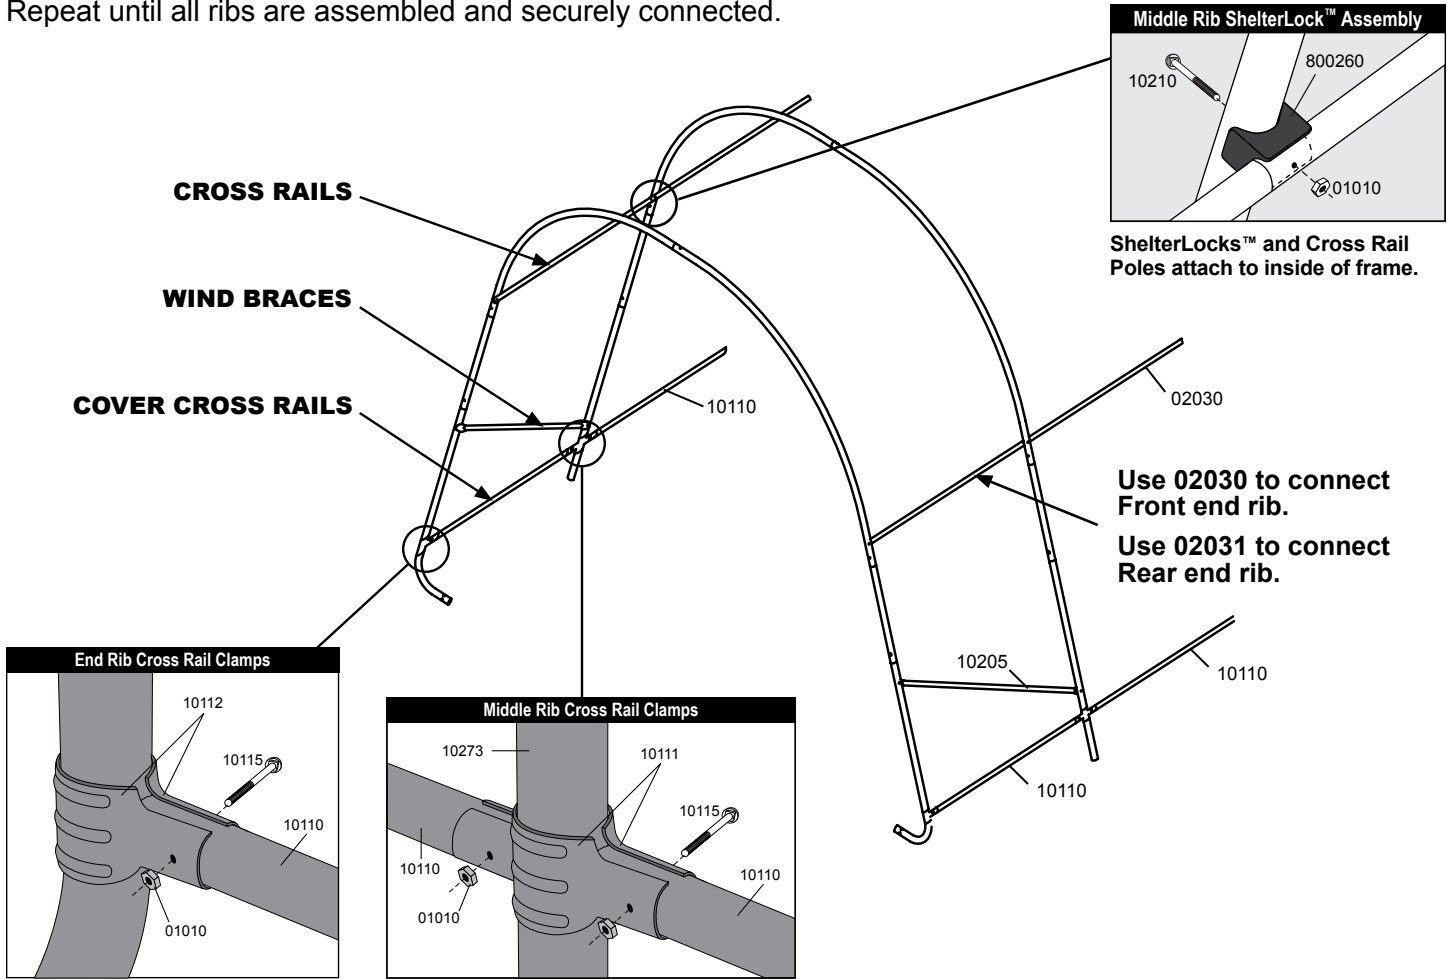


### 4. ATTACH TOP CROSS RAILS

Install the top cross rail over the middle ribs and underneath end ribs.

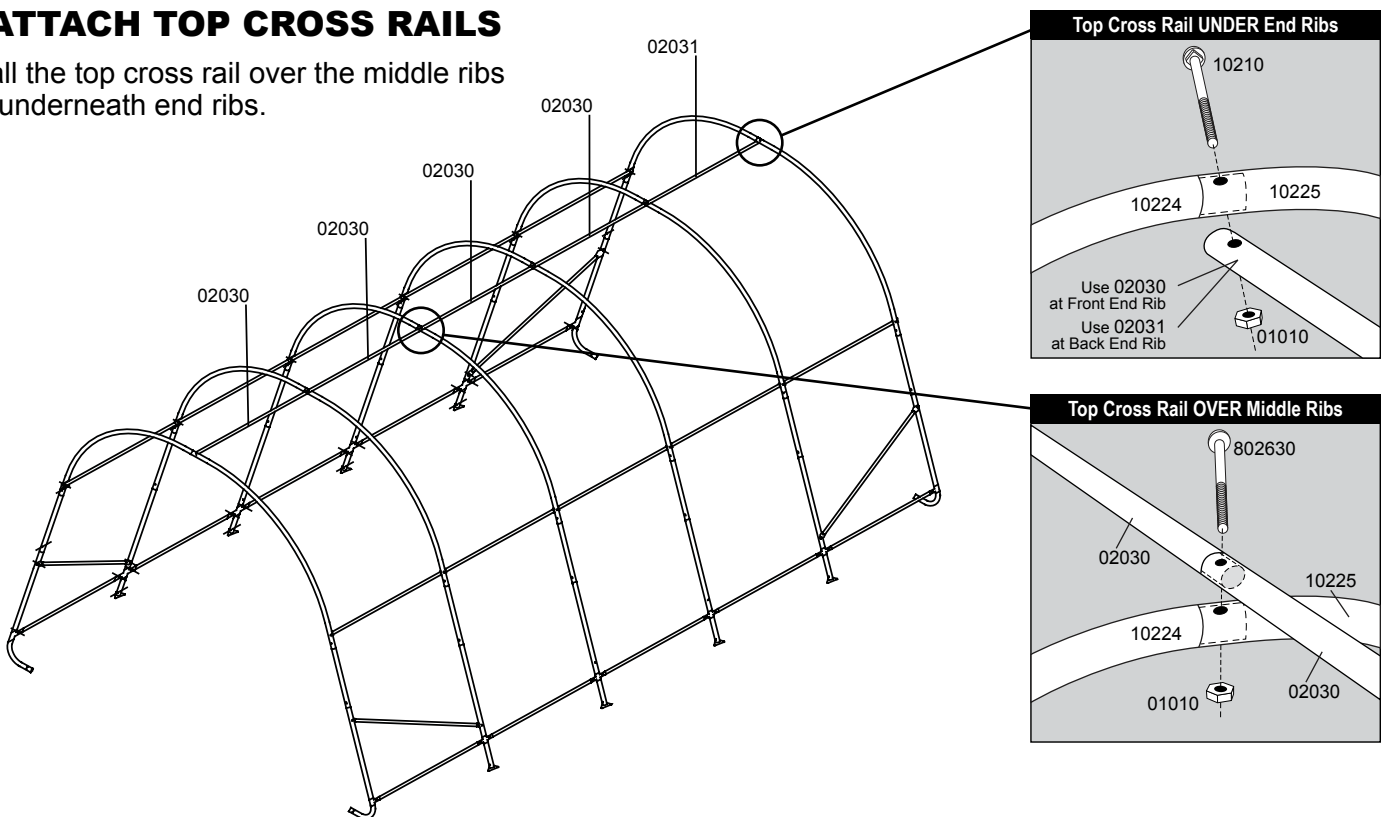

## 5. SQUARING UP THE FRAME

- A. Place frame in its final location, which needs to be as flat and level as possible.
- B. Measure across opposite corners. **These distances must be equal to within 1 inch.**
- C. Check that the front and rear of the frame measures 12 feet in width.

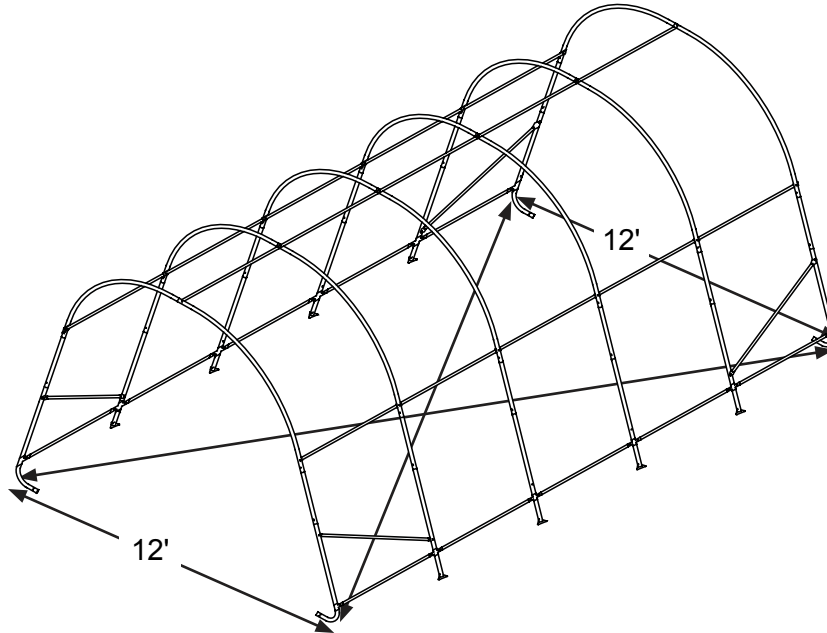


## 6. PROPERLY ANCHOR FRAME

- A. Anchors must be placed inside shelter at the corners of the shelter. Insert a 3/4-inch pipe or steel rod, through the eyelet of the auger and screw the anchor into the ground until the eyelet is sticking out of the ground by 1 to 2 inches so it can be anchored to the legs.


*If ground is too hard, dig a hole with a shovel or post hole tool. Optional: Fill with cement.*

- B. Wrap cable provided through the eyelet of the anchor and around the frame leg. Secure the cable with the clamps provided.

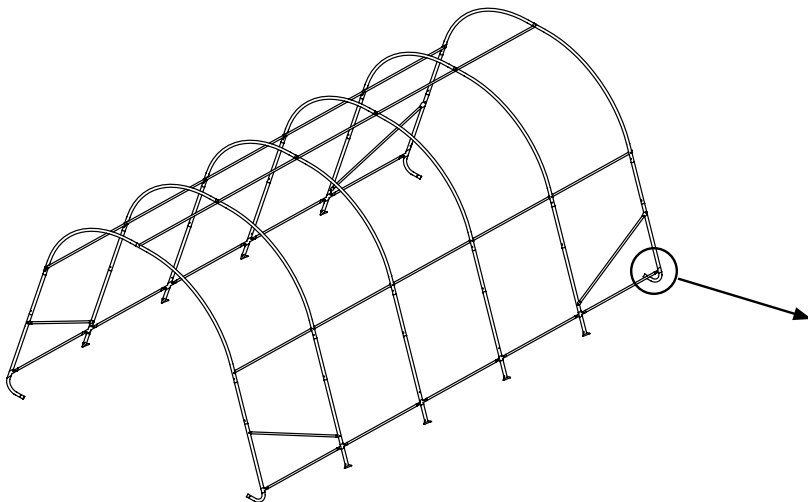

### NOTE:

**15" Augers are for temporary use only!**  
**For best results ShelterLogic recommends using our Easy Hooks (#10036 4-pack, #10035 6-pack, or #10038 8-pack) or 30" Augers (#10075 4-pack, #10078 6-pack, or #10079 8-pack) for a stronger, more secure installation.**

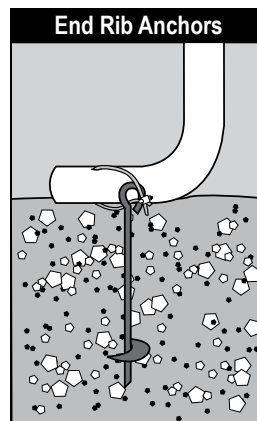

**Call 1-800-524-9970  
or visit  
[www.shelterlogic.com](http://www.shelterlogic.com)  
for more information.**

## 7. INSTALLING COVER AND COVER RAILS:

- A. Lay the cover on the ground next to the frame with inside of the cover (the side with the pipe pockets) facing down and the webbing on the front and rear of the corner of the building. Pull cover over the frame.
- B. Insert the "S"- Hook on ratchet into hole on the leg bend. Insert the webbing into the spindle of the ratchet and pull tight. Wind the ratchet so that the webbing overlaps itself.
- C. Disassemble cover rails and slide through fabric pockets at each leg and reattach with clamps to each leg. Repeat this on other side. Push down on cover rails to tighten cover, before tightening bolts completely.
- D. Check and tighten Ratchets and Cross Rails monthly to ensure the cover is tight.

**NOTE:** The ShelterLogic™ logo should be oriented as shown below.

