

Wi-Fi Commercial Thermostat

Part #: 33CONNECTSTAT

The Carrier® Connect™ thermostat keeps building operators connected to their facility's HVAC system via smartphone, tablet, or computer.

With its intuitive touchscreen interface and smartphone app, the Connect thermostat allows building operators to keep occupants comfortable, conserve energy, and operate their facilities more efficiently, from anywhere at anytime.

Easy to INSTALL

- Supports up to 4 heating and 3 cooling stages
- Tool-free, color-coded press connectors
- Includes back plate, mounting screws, and remote sensor wiring
- Connects easily to building's Wi-Fi network
- Simple and straightforward setup using app
- Contemporary design complements any décor
- Remote sensor input for reading outside air temperature or additional space temperature
- Works well in a variety of applications, including restaurants, churches, retail stores, convenience stores, office spaces, and warehouses

Easy to SET-UP

- Simple programming using app or web portal
- 7-day scheduling
- Password protection for security
- Fan and humidity control
- Choice of Fahrenheit or Celsius display
- Automatic software updates via Wi-Fi
- Demand response ready for utility rebates
- Title 24 compliant
- Secure cloud access with no monthly service fees

Need More Info?



Scan QR Code®

or visit

<http://www.carrier.com/connectstat>



Easy to USE

- Vibrant, full-color touchscreen that's easy to navigate and view from any angle
- Automatically retrieves time, date, and outdoor air temperature when connected to Wi-Fi
- Auto-dimming display lights up as you approach
- Scrolling banner on thermostat displays current date and time, fan status, outdoor temperature, humidity, and cooling/heating setpoints
- Supports secure app and web portal for controlling the temperature in your building from anywhere at any time
- Identical interface on thermostat, smartphone, and PC
- Manage single or multiple thermostats from the same location or different locations, individually or as groups, from an app or web portal
- Service alerts sent via text message and email
- Embedded contractor information lets you know who to contact for service



Carrier Connect Thermostat

Get the App!



Specifications

Physical Characteristics

Dimensions (H x W x D): 2.524 in. (64mm) x 3.525 in. (90mm) x .83 in. (21mm)

Weight: approximately .75 lb (340g)

Lead-free design

Power Requirements

24V 50/60 Hz at 6VA

Connectivity

Wi-Fi: 802.11 a/b/g/n

Environmental Requirements

For indoor installations only.

Temperature:

Operating: 32° to 104° F (0° to 40° C)

Storage: -40° to 135° F (-40° to 57° C)

Humidity:

10 to 95% RH (relative humidity), non-condensing

Agency approvals

FCC Part 15, Subpart J compliant

Electrical characteristics

Outputs:

Minimum Load = 1000 ohms

Maximum Load = 1.25 A, 50% power factor

Compatible Accessories for Remote Sensor Input

Remote space sensor (33ZCT55SPT)

Outdoor temperature sensor (33ZCSENOAT)


Duct temperature sensor (33ZCSENSAT)

Connect App:






Connect Web Portal:

Visit <https://connectstat.carrier.com> and create an account for your thermostat(s).

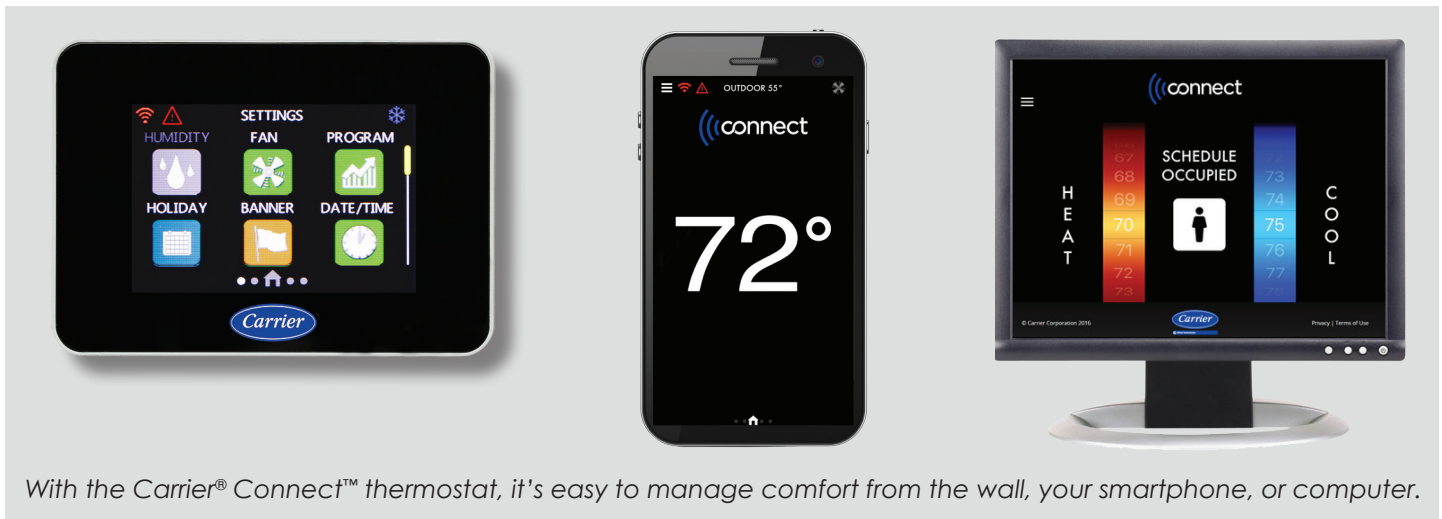

With the Carrier® Connect™ thermostat, it's easy to manage comfort from the wall, your smartphone, or computer.

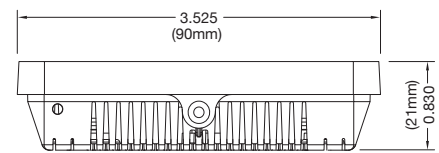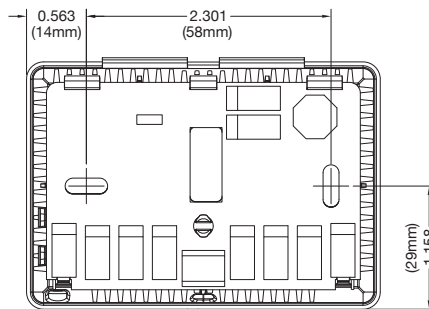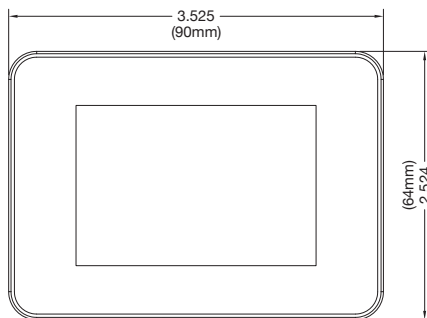

997-015120-3-R

