

Deluxe New Yorker

**NATIONAL
COMFORT
PRODUCTS**

HEATING & A/C EQUIPMENT

An Ideal Degree of Comfort for All Types of Multi-Family Construction



Condensing Units

Series/D

NCPE 1000/D
NCPE 3000/D
NCPE 4000/D



**Meets DOE Requirements
For All Units**

Features


- Interior Cabinet Insulation
- Compressor Crankcase Heater
- Compressor Hard-Start Kit
- Solid-State Condenser Fan Motor Speed Control
- High and Low Refrigerant Pressure Switches
- Compressor Anti-Cycle Time Delay
- Easy Access to Blower
- Condenser Fan Pre-Start Timer to Reduce Head Pressure at Start-Up
- Spring Isolators Under Compressor
- Vibration Absorber in Suction Line
- Optional Wall Sleeves and Architectural Louver Grilles Available on all Models

AHRI CERTIFIED
www.ahridirectory.org


Unitary Small AC
AHRI Standard 210/240
Certification applies only when the complete system
is listed with AHRI.

DELUXE NEW YORKER NCPE1000/D, NCPE3000/D, NCPE4000/D


NCPE1000/D



NCPE3000/D



NCPE4000/D

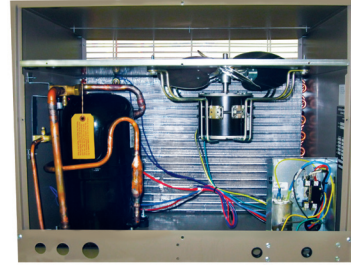

SERIES 1000 NCPE-418-1010/D	SERIES 1000 NCPE-424-1010/D	SERIES 1000 NCPE-430-1010/D	SERIES 3000 NCPE-418-3010/D	SERIES 3000 NCPE-424-3010/D	SERIES 3000 NCPE-430-3010/D	SERIES 4000 NCPE-418-4010/D	SERIES 4000 NCPE-424-4010/D	SERIES 4000 NCPE-430-4010/D
DIMENSIONS								
26 1/4" wide**	26 1/4" wide**	26 1/4" wide**	24 1/8" wide**	24 1/8" wide**	24 1/8" wide**	30" wide**	30" wide**	30" wide**
28 5/8" high	28 5/8" high	28 5/8" high	32" high	32" high	32" high	23" high	23" high	23" high
18 1/2" deep	18 1/2" deep	18 1/2" deep	18 1/2" deep	18 1/2" deep	18 1/2" deep	22 1/2" deep	22 1/2" deep	22 1/2" deep
180 lbs.	180 lbs.	180 lbs.	180 lbs.	180 lbs.	180 lbs.	180 lbs.	180 lbs.	180 lbs.
3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve	3/8" liquid valve
3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve	3/4" vapor valve
ARI RATING / INDOOR UNIT								
Nordyne B6VMMX24K-A 18,000 BTU 650 CFM	Nordyne B6VMMX24K-A 23,000 BTU 850 CFM	Nordyne B6VMMX36K-B 27,200 BTU 950 CFM	Nordyne B6VMMX24K-A 18,000 BTU 650 CFM	Nordyne B6VMMX24K-A 23,000 BTU 850 CFM	Nordyne B6VMMX36K-B 27,200 BTU 950 CFM	Nordyne B6VMMX24K-A 18,000 BTU 650 CFM	Nordyne B6VMMX24K-A 23,000 BTU 850 CFM	Nordyne B6VMMX36K-B 27,200 BTU 950 CFM
ICP FMA4X2400A 18,000 BTU 615 CFM	ICP FMA4X2400A 23,000 BTU 830 CFM	ICP FMA4X3600A 27,200 BTU 950 CFM	ICP FMA4X2400A 18,000 BTU 615 CFM	ICP FMA4X2400A 23,000 BTU 830 CFM	ICP FMA4X3600A 27,200 BTU 950 CFM	ICP FMA4X2400A 18,000 BTU 615 CFM	ICP FMA4X2400A 23,000 BTU 830 CFM	ICP FMA4X3600A 27,200 BTU 950 CFM
12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER	12.0 SEER
ELECTRICAL								
208/230 volts	208/230 volts	208/230 volts	208/230 volts	208/230 volts	208/230 volts	208/230 volts	208/230 volts	208/230 volts
60 hertz	60 hertz	60 hertz	60 hertz	60 hertz	60 hertz	60 hertz	60 hertz	60 hertz
1 phase	1 phase	1 phase	1 phase	1 phase	1 phase	1 phase	1 phase	1 phase
12 min. AWG wire	10 min. AWG wire	10 min. AWG wire	12 min. AWG wire	10 min. AWG wire	10 min. AWG wire	12 min. AWG wire	10 min. AWG wire	10 min. AWG wire
20 max. fuse	30 max. fuse	30 max. fuse	20 max. fuse	30 max. fuse	30 max. fuse	20 max. fuse	30 max. fuse	30 max. fuse
COMPRESSOR								
9 RLA (amps)	13.5 RLA (amps)	12.8 RLA (amps)	9 RLA (amps)	13.5 RLA (amps)	14.1 RLA (amps)	9 RLA (amps)	13.5 RLA (amps)	12.8 RLA (amps)
48.0 LRA	58.3 LRA	64.0 LRA	48.0 LRA	58.3 LRA	73.0 LRA	48.0 LRA	58.3 LRA	64.0 LRA
FAN MOTOR								
.25 HP	.25 HP	.25 HP	.25 HP	.25 HP	.25 HP	.25 HP	.25 HP	.25 HP
1.4 amps	1.4 amps	1.4 amps	1.4 amps	1.4 amps	1.4 amps	1.4 amps	1.4 amps	1.4 amps
1100 CFM	1100 CFM	1100 CFM	1100 CFM	1100 CFM	1100 CFM	1100 CFM	1100 CFM	1100 CFM
COIL								
3 rows	4 rows	4 rows	3 rows	4 rows	4 rows	3 rows	4 rows	4 rows
3.61 face area	3.61 face area	3.61 face area	3.77 face area	3.77 face area	3.77 face area	3.14 face area	3.14 face area	3.14 face area
16 FPI	16 FPI	16 FPI	16 FPI	16 FPI	16 FPI	16 FPI	16 FPI	16 FPI
REPLACES								
Bryant, Carrier, Day & Night, Dunham-Bush, Lennox, Magic Chef, Meyer, Payne, First Co., U.S. A/C (BB)			Carrier, Fedders, Dunham-Bush, Lennox, Magic Chef, Meyer, Rheem, First Co., U.S. A/C (AB)			Dunham-Bush, Hydro-Therm Space Pack, Lennox, Luxaire York, First Co., U.S. A/C (CB)		

Note: All specifications are subject to change without notice. *Condensing units are compatible with most manufacturers of indoor air handlers and coils.

Dimensions including screw heads on both sides of the cabinet. **All specifications are subject to change without notice.



HEATING & A/C EQUIPMENT

National Comfort Products
 A Division of National Refrigeration and Air Conditioning Products, Inc.
 539 Dunksferry Road • Bensalem, PA 19020-5908
 (800) 523-7138 • Fax (215) 638-1674
www.nationalcomfortproducts.com



Spec NCPE_D 06/24/2015