

# 4SHP15LE

## PRODUCT SPECIFICATIONS

15 SEER SPLIT HEAT PUMP SYSTEM  
UP TO 16 SEER & 9.0 HSPF

FORM NO. 4SHP15LE-100 (08/2021)



### COMPRESSOR

- High-efficiency scroll compressor
- R410A refrigerant
- Grommet mounted compressor for quiet operation
- Heavy-duty compressor sound blanket for quiet operation
- Internally protected against high temperature motor overload conditions

### CABINET

- Full metal louvered panel with 2 screws to remove for ease of coil cleaning and service
- Corner-mounted controls for easy service
- Rounded corners for safety and attractive, clean appearance
- Baked polyester paint finished over galvanized steel for maximum durability
- Removable PVC coated wire fan discharge grill
- 45-degree offset gauge ports for easy service
- Removable service panel for internal access

### COILS

- Omniguard™ total corrosion protection technology designed coil
- Enhanced tube-and-fin coil design featuring MHT™ Technology
- Lanced fins for maximum heat transfer
- Factory tested for leakproof construction
- Raised coil prevents debris from impeding airflow

### DESIGN

- Designed to perform in temperatures up to 125°F
- Designed to perform in temperatures down to 0°F

### COMPONENTS

- Factory installed crankcase heater (on select models)
- Factory installed high and low pressure switches
- Thread-on pressure switches with Schrader core for simple, quick replacement
- Filter drier shipped loose for installation flexibility
- Fan orifice for smoother airflow and sound level reduction
- Charged for 15 feet of line set
- Discharge muffler for quiet operation
- Quiet Shift™ capable to reduce noise during defrost
- Sealed Contactor with lugs

### WARRANTY

10 year limited warranty on compressor

10 year limited warranty on all parts, extended warranty available\*


*\*Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty). Warranty must be registered online within 60 days of installation to qualify for 10-year coverage. Unregistered equipment defaults to 5-year coverage. See full warranty at [www.alliedair.com](http://www.alliedair.com) for terms, conditions, and exclusions.*

### **NOTE:**

For the latest AHRI system matches, please visit [www.alliedratings.com](http://www.alliedratings.com) or [www.AHRIdirectory.org](http://www.AHRIdirectory.org)



**MODEL NUMBER GUIDE**

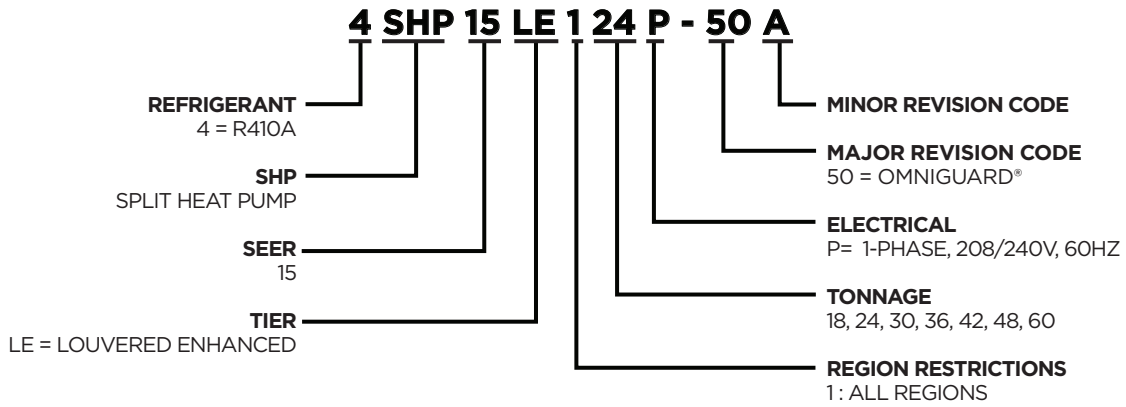


**PHYSICAL AND ELECTRICAL DATA**

Model	Voltage/Hz/Phase	Voltage Range	Min. Circuit Amp.	Max. Over Current Device (amps)	Compressor		Outdoor Fan Motor		
					Rated Load (amps)	Locked Rotor (amps)	Full Load (amps)	Rated HP	Nom. RPM
4SHP15LE118P-50	208-230/60/1	197-253	12.3	20	9.0	48	1.0	1/6	825
4SHP15LE124P-50	208-230/60/1	197-253	13.6	20	10.1	52	1.0	1/6	825
4SHP15LE130P-50	208-230/60/1	197-253	17.0	25	12.8	64	1.0	1/6	825
4SHP15LE136P-50	208-230/60/1	197-253	18.6	30	14.1	72	1.0	1/6	825
4SHP15LE142P-50	208-230/60/1	197-253	25.8	40	19.2	124	1.8	1/3	825
4SHP15LE148P-50	208-230/60/1	197-253	26.2	45	19.6	130	1.8	1/3	825
4SHP15LE160P-50	208-230/60/1	197-253	29.4	50	22.1	128	1.8	1/3	825

**UNIT DIMENSIONS (IN.)**

Model	Dimensions (inch)			Shipping Weight (lbs.)
	A - Width	B - Depth	C - Height	
4SHP15LE118P-50	29.25	31.25	43.75	207
4SHP15LE124P-50	29.25	31.25	43.75	208
4SHP15LE130P-50	29.25	31.25	43.75	205
4SHP15LE136P-50	29.25	31.25	37.75	224
4SHP15LE142P-50	35.75	37.75	37.75	290
4SHP15LE148P-50	35.75	37.75	37.75	293
4SHP15LE160P-50	35.75	37.75	43.75	336

*Note: Dimensions listed are unit sizes w/o packaging  
Weights listed are unit weights with packaging*

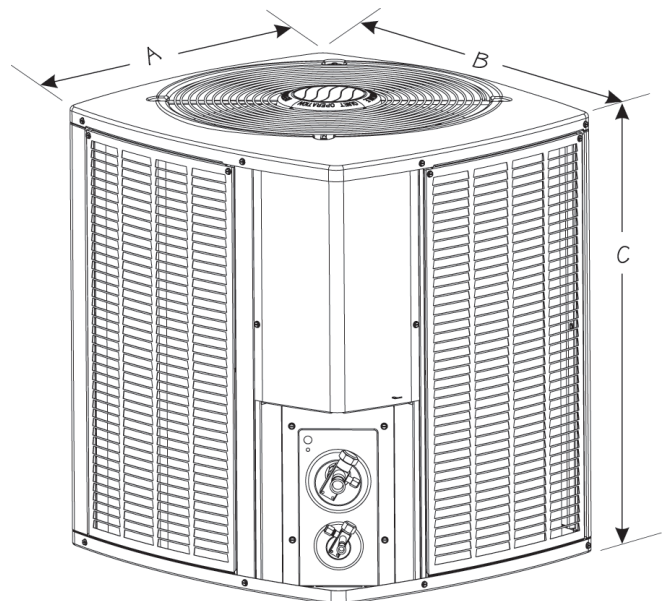

**SOUND RATINGS**

Model	Sound Power <sup>1</sup>	Estimated Sound Pressure (dBA) <sup>2</sup>		
		Approximate Distance <sup>3</sup>		
		3.3 Feet (1 Meter)	6.6 Feet (2 Meters)	9.8 Feet (3 Meters)
4SHP15LE118P-50	74	66	60	56
4SHP15LE124P-50	74	66	60	56
4SHP15LE130P-50	73	65	59	55
4SHP15LE136P-50	77	69	63	59
4SHP15LE142P-50	77	69	63	59
4SHP15LE148P-50	79	71	65	61
4SHP15LE160P-50	77	69	63	59

1 Rated in accordance with AHRI standard 270 (2015). AHRI Standard 270 establishes a method of rating outdoor unitary equipment in terms of Sound Power.

2 Rated in accordance with AHRI standard 275 (2010). AHRI Standard 275 provides the calculations for estimating the A-Weighted Sound Pressure at a given distance from the equipment. That is a more useful number because that is what humans will hear.

3 Based only on distance factor; other factors may change this value such as:

- Unit location (reflective surfaces adjacent to the unit)
- Barrier shielding sources
- Sound path/elevation
- Outside noise sources

**ACCESSORIES**

System Accessory	Where Used	Kit Number	Purpose
Liquid Line solenoid	All models	60M52	Prevents liquid migration to the compressor especially for high liquid riser applications
Low ambient HP units (cooling operation)	All models	54M89	Enables cooling demand down to 30 °F. Will require freeze stat, CC heater and TXV.
Mild ambient (heating operation)	All models	11B97	Enables heating demand above 60 °F ambient
Cold weather	Control Board Integrated Feature		To allow unit to operate at very low ambient conditions (older models). Board integrated feature on new models
Fossil Fuel Kit (Heat Pump Only)	All models	1.841185	Required for furnace with heat pump installations
Hard Start	24 & 36	10J42	Scroll compressors usually do not require hard start; maybe needed for utility brown-out or low voltage areas
Hard Start	48 & 60	81J69	
Crankcase Heater	18, 24, 30	93M04	Prevents liquid migration to compressor in cold weather
Crankcase Heater	36, 42, 48, 60	Factory Installed	
Sound Cover	Factory Installed		Lowers compressor sound level
Loss of Charge Kit	Factory Installed		Protects the compressor if refrigerant charge is too low
<b>Additional System Accessories (indoor section)</b>			
TXV Kit	18, 24, 30	H4TXV01	TXVs provide superior refrigerant flow control, comfort and efficiency compared to pistons
	36, 42, 48	H4TXV02	
	60	H4TXV03	
Outdoor Thermostat - electric heat	All models	10Z23	Prevents electric heat operation above specific ambient conditions
Outdoor Thermostat - Mounting box	All models	31461	Mounting box for outdoor thermostat
Freeze stat	All models	93G35	Protects the compressor at low suction pressure conditions
Over flow switch	All models	11U75	Turn the system off, if condensate water overflows due to clogged drain pipes
Single point power supply	All models	21H39	Provide single power source in one junction box
Auxiliary blower relay	All models	85W66	Maybe required to select multiple indoor blower speeds

**REFRIGERATION DATA**

Model	Factory Refrig. Charge (Oz.)*	TXV	Refrigerant Line Size		Outdoor Unit Connection		Indoor Unit Connection	
			Suction	Liquid	Suction	Liquid	Suction	Liquid
4SHP15LE118P-50	106	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4SHP15LE124P-50	98	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4SHP15LE130P-50	105	H4TXV01	3/4	3/8	3/4	3/8	3/4	3/8
4SHP15LE136P-50	136	H4TXV02	7/8	3/8	7/8	3/8	3/4	3/8
4SHP15LE142P-50	147	H4TXV02	7/8	3/8	7/8	3/8	7/8	3/8
4SHP15LE148P-50	159	H4TXV02	7/8	3/8	7/8	3/8	7/8	3/8
4SHP15LE160P-50	180	H4TXV03	1 1/8	3/8	7/8	3/8	7/8	3/8

\*Factory charged for 15 feet of line set; adjust per installation instructions.  
Refrigerant charge also varies with indoor unit; Refer refrigerant charge label

**COOLING PERFORMANCE WITH DTC<sup>1</sup>**

Outdoor Model	Indoor Model Evap. Coil or Air Handler <sup>3</sup>	Cooling				Heating				
		SEER	EER	AHRI Rated Capacity <sup>2</sup>	Sensible Capacity	HSPF	47°		17°	
							Btuh	COP	Btuh	COP
4SHP15LE118P-50	BCE5C18MA4X	14.00	12.00	18000	14200	8.20	17600	3.5	10800	2.3
4SHP15LE124P-50	BCE5C24MA4X	14.00	12.00	23800	19000	8.20	22200	3.6	14300	2.4
4SHP15LE130P-50	BCE5C30MA4X	14.00	11.50	29600	23200	8.20	27000	3.5	17500	2.4
4SHP15LE136P-50	BCE5C36MA4X	14.00	12.00	33400	25800	8.20	31200	3.4	20000	2.4
4SHP15LE142P-50	BCE5C42MA4X	14.00	12.00	40500	29500	8.20	39500	3.2	26200	2.4
4SHP15LE148P-50	BCE5C48MA4X	14.00	11.50	47500	36000	8.20	46000	3.3	29000	2.4
4SHP15LE160P-50	BCE5C60MA4X	14.00	12.00	56500	41500	8.20	54500	3.5	35400	2.6

Note:

<sup>1</sup> DTC = Designated Tested Combination

<sup>2</sup> Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240

<sup>3</sup> A blower time delay relay is standard on all Allied Air Enterprises furnace and AH products.

**NOTE:**

For the latest AHRI system matches, please visit [www.alliedratings.com](http://www.alliedratings.com) or [www.AHRIdirectory.org](http://www.AHRIdirectory.org)

### COOLING PERFORMANCE EXTENDED RATINGS

Note: Shaded area is AHRI Rating Conditions

Indoor Wet Bulb Temperature		Outdoor Air Temperature Entering Outdoor Coil																																
		85° F (29.4° C)						95° F (35° C)						105° F (40.6° C)						115° F (46.1° C)						125° F (51.7° C)								
		Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts		
		kBTuh	80°F 26.7°C	85°F 29.4°C	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input		
<b>4SHPI5LE118P-50 - BCE5C18M*4X</b>		525	16.8	1040	.91	1.00	1.00	1180	.94	1.00	1.00	15.4	1340	.97	1.00	1.00	14.5	1510	1.00	1.00	1.00	13.5	1710	1.00	1.00	1.00	10.0	1.00	1.00	1.00	1710			
		59°F (15°C)	675	18.3	1030	.99	1.00	1.00	1180	1.00	1.00	1.00	16.7	1340	1.00	1.00	1.00	15.7	1510	1.00	1.00	1.00	14.6	1710	1.00	1.00	1.00	10.0	1.00	1.00	1.00	1710		
		63°F (17.2°C)	710	18.6	1030	1.00	1.00	1.00	1180	1.00	1.00	1.00	16.9	1340	1.00	1.00	1.00	15.9	1510	1.00	1.00	1.00	14.9	1710	1.00	1.00	1.00	10.0	1.00	1.00	1.00	1710		
		67°F (19.4°C)	525	17.6	1030	.74	.88	1.00	1180	.76	.90	1.00	15.7	1340	.78	.93	1.00	14.7	1510	.80	.97	1.00	13.5	1710	.84	1.00	1.00	10.0	1.00	1.00	1.00	1710		
		67°F (19.4°C)	675	18.6	1030	.80	.96	1.00	1180	.82	.99	1.00	16.6	1340	.85	1.00	1.00	15.7	1510	.88	1.00	1.00	14.7	1710	.92	1.00	1.00	10.0	1.00	1.00	1.00	1710		
		67°F (19.4°C)	710	18.8	1030	.81	.98	1.00	1180	.83	1.00	1.00	16.9	1340	.86	1.00	1.00	15.9	1520	.90	1.00	1.00	14.9	1710	.94	1.00	1.00	10.0	1.00	1.00	1.00	1710		
		71°F (21.7°C)	525	18.6	1030	.59	.72	.84	1170	.60	.73	.87	16.7	1340	.61	.75	.89	15.6	1510	.62	.78	.93	14.5	1710	.64	.81	.97	10.0	1.00	1.00	1.00	1710		
		71°F (21.7°C)	675	19.6	1020	.63	.78	.93	1170	.64	.80	.95	17.6	1340	.65	.82	.99	16.4	1520	.67	.85	1.00	15.2	1710	.69	.89	1.00	10.0	1.00	1.00	1.00	1710		
		71°F (21.7°C)	710	19.8	1020	.63	.79	.95	1170	.64	.81	.97	17.7	1340	.66	.83	1.00	16.6	1510	.68	.87	1.00	15.3	1710	.71	.91	1.00	10.0	1.00	1.00	1.00	1710		
		71°F (21.7°C)	525	19.6	1020	.45	.57	.69	1170	.45	.58	.70	17.7	1340	.45	.59	.73	16.6	1520	.46	.61	.75	15.4	1710	.47	.63	.78	10.0	1.00	1.00	1.00	1710		
71°F (21.7°C)	675	20.6	1010	.47	.61	.76	1170	.47	.62	.77	18.6	1340	.47	.64	.80	17.4	1520	.48	.65	.83	16.2	1710	.49	.68	.86	10.0	1.00	1.00	1.00	1710				
71°F (21.7°C)	710	20.8	1010	.47	.62	.77	1170	.47	.63	.79	18.8	1340	.48	.65	.81	17.6	1520	.49	.67	.84	16.4	1720	.49	.69	.88	10.0	1.00	1.00	1.00	1720				
<b>4SHPI5LE124P-50 - BCE5C24M*4X</b>		680	22.4	1380	.93	1.00	1.00	1550	.96	1.00	1.00	20.4	1750	.99	1.00	1.00	19.2	2000	1.00	1.00	1.00	18.0	2320	1.00	1.00	1.00	10.0	1.00	1.00	1.00	2320			
		59°F (15°C)	875	24.4	1360	1.00	1.00	1.00	1540	1.00	1.00	22.2	1740	1.00	1.00	1.00	20.8	1980	1.00	1.00	1.00	19.4	2310	1.00	1.00	1.00	10.0	1.00	1.00	1.00	2310			
		63°F (17.2°C)	915	24.6	1360	1.00	1.00	1.00	1530	1.00	1.00	22.4	1730	1.00	1.00	1.00	21.0	1980	1.00	1.00	1.00	19.6	2300	1.00	1.00	1.00	10.0	1.00	1.00	1.00	2300			
		67°F (19.4°C)	680	23.2	1370	.75	.89	1.00	1550	.77	.92	1.00	20.8	1750	.79	.95	1.00	19.4	2000	.82	.98	1.00	18.0	2330	.85	1.00	1.00	10.0	1.00	1.00	1.00	2330		
		67°F (19.4°C)	875	24.6	1360	.81	.98	1.00	1540	.84	1.00	1.00	22.0	1730	.86	1.00	1.00	20.8	1990	.90	1.00	1.00	19.4	2310	.94	1.00	1.00	10.0	1.00	1.00	1.00	2310		
		67°F (19.4°C)	915	24.8	1360	.83	.99	1.00	1530	.85	1.00	1.00	22.4	1730	.88	1.00	1.00	21.0	1990	.91	1.00	1.00	19.7	2310	.96	1.00	1.00	10.0	1.00	1.00	1.00	2310		
		71°F (21.7°C)	680	24.8	1360	.59	.73	.86	1530	.60	.74	.88	22.2	1740	.61	.77	.91	20.6	1980	.63	.79	.95	19.1	2310	.65	.82	.99	10.0	1.00	1.00	1.00	2310		
		71°F (21.7°C)	875	26.0	1350	.63	.79	.94	1520	.64	.81	.97	23.4	1720	.66	.84	1.00	21.6	1970	.68	.87	1.00	20.0	2300	.70	.91	1.00	10.0	1.00	1.00	1.00	2300		
		71°F (21.7°C)	915	26.2	1340	.64	.80	.96	1520	.65	.82	.99	23.4	1720	.67	.85	1.00	21.8	1970	.69	.89	1.00	20.0	2290	.71	.93	1.00	10.0	1.00	1.00	1.00	2290		
		71°F (21.7°C)	680	26.0	1340	.45	.57	.70	1520	.45	.59	.72	23.4	1720	.46	.60	.74	22.0	1970	.46	.61	.76	20.4	2290	.47	.63	.79	10.0	1.00	1.00	1.00	2290		
71°F (21.7°C)	875	27.6	1330	.46	.62	.76	1500	.47	.63	.79	24.8	1700	.48	.64	.81	23.0	1950	.48	.66	.84	21.4	2280	.49	.69	.88	10.0	1.00	1.00	1.00	2280				
71°F (21.7°C)	915	27.8	1320	.47	.62	.78	1500	.47	.64	.80	25.0	1700	.48	.65	.82	23.2	1950	.49	.67	.86	21.4	2270	.50	.70	.90	10.0	1.00	1.00	1.00	2270				

### COOLING PERFORMANCE EXTENDED RATINGS

Note: Shaded area is AHRI Rating Conditions

Indoor Wet Bulb Temperature		Outdoor Air Temperature Entering Outdoor Coil																																			
		85° F (29.4° C)						95° F (35° C)						105° F (40.6° C)						115° F (46.1° C)						125° F (51.7° C)											
		Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts		
		kBTuh	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	kBTuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Input	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C					
		<b>4SHP15LE130P-50 - BCE5C30M*4X</b>																																			
59°F (15°C)	845	28.4	1680	.93	1.00	1.00	270	1900	.95	1.00	1.00	258	2160	.98	1.00	1.00	242	2440	1.00	1.00	1.00	2440	2440	1.00	1.00	1.00	22.6	2790	1.00	1.00	1.00						
	1025	30.2	1690	.99	1.00	1.00	28.8	1910	1.00	1.00	1.00	27.4	2170	1.00	1.00	1.00	25.6	2460	1.00	1.00	1.00	2460	2460	1.00	1.00	1.00	23.8	2790	1.00	1.00	1.00						
	1150	31.2	1700	1.00	1.00	1.00	29.8	1920	1.00	1.00	1.00	28.2	2170	1.00	1.00	1.00	26.4	2460	1.00	1.00	1.00	2460	2460	1.00	1.00	1.00	24.6	2800	1.00	1.00	1.00						
63°F (17.2°C)	845	29.4	1680	.75	.89	1.00	27.8	1910	.76	.92	1.00	26.2	2160	.79	.95	1.00	24.4	2440	.82	.98	1.00	2440	2440	.82	.98	1.00	22.6	2790	.85	1.00	1.00						
	1025	30.6	1690	.80	.95	1.00	29.0	1910	.82	.98	1.00	27.4	2160	.84	1.00	1.00	25.6	2460	.88	1.00	1.00	2460	2460	.88	1.00	1.00	23.8	2800	.92	1.00	1.00						
	1150	31.4	1700	.83	.99	1.00	29.8	1920	.85	1.00	1.00	28.2	2170	.88	1.00	1.00	26.4	2460	.92	1.00	1.00	2460	2460	.92	1.00	1.00	24.6	2800	.96	1.00	1.00						
67°F (19.4°C)	845	31.2	1690	.59	.73	.86	29.6	1920	.60	.74	.88	27.8	2170	.62	.76	.91	26.0	2460	.63	.79	.95	2460	2460	.63	.79	.95	23.8	2800	.65	.83	.99						
	1025	32.6	1700	.62	.77	.92	30.8	1930	.63	.80	.95	29.0	2180	.65	.82	.98	27.0	2460	.67	.85	1.00	2460	2460	.67	.85	1.00	24.6	2800	.69	.89	1.00						
	1150	33.2	1710	.64	.80	.96	31.4	1930	.65	.83	.99	29.6	2180	.67	.85	1.00	27.4	2470	.69	.89	1.00	2470	2470	.69	.89	1.00	25.2	2810	.72	.94	1.00						
71°F (21.7°C)	845	33.0	1700	.45	.58	.70	31.2	1930	.45	.58	.72	29.6	2180	.46	.60	.74	27.4	2470	.46	.62	.77	2470	2470	.46	.62	.77	25.4	2810	.47	.64	.80						
	1025	34.4	1710	.46	.61	.75	32.6	1940	.47	.62	.77	30.6	2190	.47	.63	.79	28.6	2480	.48	.65	.83	2480	2480	.48	.65	.83	26.2	2810	.49	.68	.87						
	1150	35.0	1720	.47	.62	.78	33.2	1940	.47	.64	.80	31.2	2190	.48	.66	.83	29.0	2480	.49	.68	.87	2480	2480	.49	.68	.87	26.8	2820	.50	.71	.91						
		<b>4SHP15LE136P-50 - BCE5C36M*4X</b>																																			
59°F (15°C)	1050	32.6	1910	.93	1.00	1.00	31.2	2170	.95	1.00	1.00	29.8	2450	.99	1.00	1.00	28.2	2760	1.00	1.00	1.00	2760	2760	1.00	1.00	1.00	26.4	3130	1.00	1.00	1.00						
	1200	34.0	1910	.98	1.00	1.00	32.6	2170	1.00	1.00	1.00	31.0	2450	1.00	1.00	1.00	29.4	2770	1.00	1.00	1.00	2770	2770	1.00	1.00	1.00	27.4	3140	1.00	1.00	1.00						
	1350	35.2	1910	1.00	1.00	1.00	33.6	2170	1.00	1.00	1.00	32.0	2450	1.00	1.00	1.00	30.2	2770	1.00	1.00	1.00	2770	2770	1.00	1.00	1.00	28.2	3140	1.00	1.00	1.00						
63°F (17.2°C)	1050	33.6	1910	.71	.88	1.00	32.0	2170	.73	.91	1.00	30.2	2450	.75	.95	1.00	28.2	2770	.78	.99	1.00	2770	2770	.78	.99	1.00	26.2	3130	.82	1.00	1.00						
	1200	34.6	1910	.74	.94	1.00	32.8	2170	.77	.97	1.00	31.0	2450	.79	1.00	1.00	29.2	2770	.83	1.00	1.00	2770	2770	.83	1.00	1.00	27.2	3140	.88	1.00	1.00						
	1350	35.2	1910	.78	.99	1.00	33.6	2170	.80	1.00	1.00	32.0	2450	.84	1.00	1.00	30.2	2770	.88	1.00	1.00	2770	2770	.88	1.00	1.00	28.2	3140	.93	1.00	1.00						
67°F (19.4°C)	1050	35.4	1910	.56	.69	.84	33.8	2170	.57	.70	.87	32.0	2450	.58	.72	.90	30.0	2770	.59	.75	.95	2770	2770	.59	.75	.95	27.6	3140	.61	.79	1.00						
	1200	36.4	1910	.58	.72	.89	34.8	2170	.59	.74	.93	32.8	2450	.60	.76	.96	30.6	2770	.62	.80	1.00	2770	2770	.62	.80	1.00	28.2	3140	.64	.85	1.00						
	1350	37.2	1910	.60	.75	.95	35.4	2170	.61	.78	.98	33.4	2460	.62	.81	1.00	31.2	2770	.64	.85	1.00	2770	2770	.64	.85	1.00	28.8	3140	.66	.90	1.00						
71°F (21.7°C)	1050	37.4	1910	.42	.54	.66	35.8	2170	.42	.56	.68	33.8	2450	.43	.57	.70	31.8	2770	.44	.58	.72	2770	2770	.44	.58	.72	29.4	3140	.44	.60	.76						
	1200	38.5	1910	.43	.57	.70	36.6	2170	.43	.58	.71	34.6	2460	.44	.59	.74	32.4	2780	.45	.61	.77	2780	2780	.45	.61	.77	30.0	3150	.45	.63	.81						
	1350	39.0	1900	.44	.59	.73	37.4	2170	.44	.60	.75	35.4	2460	.45	.61	.78	33.0	2780	.45	.63	.82	2780	2780	.45	.63	.82	30.4	3150	.46	.66	.87						

### COOLING PERFORMANCE EXTENDED RATINGS

Note: Shaded area is AHRI Rating Conditions

Indoor Wet Bulb Temperature		Outdoor Air Temperature Entering Outdoor Coil																																			
		85° F (29.4° C)						95° F (35° C)						105° F (40.6° C)						115° F (46.1° C)						125° F (51.7° C)											
		Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts			Total Cooling Capacity			Sensible To Total Ratio (S/T)			Comp. Motor Watts		
		kBtuh	80°F 26.7°C	85°F 29.4°C	75°F 23.9°C	Indoor Dry Bulb	Indoor Dry Bulb	Indoor Dry Bulb	Input	kBtuh	80°F 26.7°C	85°F 29.4°C	75°F 23.9°C	Indoor Dry Bulb	Indoor Dry Bulb	Indoor Dry Bulb	Input	kBtuh	80°F 26.7°C	85°F 29.4°C	75°F 23.9°C	Indoor Dry Bulb	Indoor Dry Bulb	Indoor Dry Bulb	Input	kBtuh	80°F 26.7°C	85°F 29.4°C	75°F 23.9°C	Indoor Dry Bulb	Indoor Dry Bulb	Indoor Dry Bulb	Input				
		<b>4SH15LE142P-50 - BCE5C42M*4X</b>																																			
59°F (15°C)	1225	39.0	2280	.91	1.00	1.00	2580	.94	1.00	1.00	36.0	2930	.97	1.00	1.00	34.2	3310	1.00	1.00	1.00	32.0	3750	1.00	1.00	1.00	32.0	3750	1.00	1.00	1.00	32.0	3750	1.00	1.00	1.00		
	1400	41.0	2280	.96	1.00	1.00	2590	.99	1.00	1.00	37.4	2930	1.00	1.00	1.00	35.6	3320	1.00	1.00	1.00	33.4	3750	1.00	1.00	1.00	33.4	3750	1.00	1.00	1.00	33.4	3750	1.00	1.00	1.00		
	1575	42.5	2290	1.00	1.00	1.00	2590	1.00	1.00	1.00	39.0	2930	1.00	1.00	1.00	36.8	3320	1.00	1.00	1.00	34.2	3760	1.00	1.00	1.00	34.2	3760	1.00	1.00	1.00	34.2	3760	1.00	1.00	1.00		
63°F (17.2°C)	1225	40.5	2280	.71	.87	1.00	2590	.73	.90	1.00	36.8	2930	.75	.93	1.00	34.6	3320	.77	.96	1.00	32.0	3760	.81	1.00	1.00	32.0	3760	.81	1.00	1.00	32.0	3760	.81	1.00	1.00		
	1400	42.0	2290	.74	.92	1.00	2580	.77	.95	1.00	37.8	2930	.79	.98	1.00	35.6	3320	.82	1.00	1.00	33.2	3750	.86	1.00	1.00	33.2	3750	.86	1.00	1.00	33.2	3750	.86	1.00	1.00		
	1575	43.0	2290	.77	.97	1.00	2590	.80	.99	1.00	39.0	2930	.83	1.00	1.00	36.6	3320	.86	1.00	1.00	34.4	3760	.90	1.00	1.00	34.4	3760	.90	1.00	1.00	34.4	3760	.90	1.00	1.00		
67°F (19.4°C)	1225	43.0	2290	.56	.69	.83	2590	.57	.71	.85	39.0	2930	.58	.72	.88	36.6	3310	.59	.75	.92	34.0	3760	.61	.78	.97	34.0	3760	.61	.78	.97	34.0	3760	.61	.78	.97		
	1400	44.5	2290	.58	.72	.88	2590	.59	.74	.91	40.0	2930	.60	.76	.94	37.4	3320	.62	.79	.98	34.8	3760	.64	.83	1.00	34.8	3760	.64	.83	1.00	34.8	3760	.64	.83	1.00		
	1575	45.0	2280	.60	.75	.92	2590	.61	.77	.96	40.5	2930	.62	.80	.99	38.0	3320	.64	.84	1.00	35.4	3760	.66	.88	1.00	35.4	3760	.66	.88	1.00	35.4	3760	.66	.88	1.00		
71°F (21.7°C)	1225	45.5	2290	.43	.55	.67	2590	.43	.56	.68	41.0	2930	.44	.57	.70	38.5	3320	.44	.58	.72	36.0	3760	.45	.60	.75	36.0	3760	.45	.60	.75	36.0	3760	.45	.60	.75		
	1400	46.5	2290	.44	.57	.70	2590	.44	.58	.72	42.5	2930	.44	.59	.74	39.5	3320	.45	.61	.76	36.8	3760	.46	.63	.80	36.8	3760	.46	.63	.80	36.8	3760	.46	.63	.80		
	1575	47.5	2280	.44	.59	.73	2590	.45	.60	.74	43.0	2930	.45	.61	.77	40.5	3320	.46	.63	.81	37.6	3760	.47	.65	.85	37.6	3760	.47	.65	.85	37.6	3760	.47	.65	.85		
		<b>4SH15LE148P-50 - BCE5C48M*4X</b>																																			
59°F (15°C)	1400	40.5	2800	.91	1.00	1.00	3180	.93	1.00	1.00	37.2	3620	.96	1.00	1.00	35.2	4120	1.00	1.00	1.00	33.0	4680	1.00	1.00	1.00	33.0	4680	1.00	1.00	1.00	33.0	4680	1.00	1.00	1.00		
	1595	42.5	2800	.95	1.00	1.00	3190	.98	1.00	1.00	38.5	3620	1.00	1.00	1.00	36.6	4120	1.00	1.00	1.00	34.2	4690	1.00	1.00	1.00	34.2	4690	1.00	1.00	1.00	34.2	4690	1.00	1.00	1.00		
	1840	44.0	2800	1.00	1.00	1.00	3190	1.00	1.00	1.00	40.0	3630	1.00	1.00	1.00	38.0	4130	1.00	1.00	1.00	35.4	4690	1.00	1.00	1.00	35.4	4690	1.00	1.00	1.00	35.4	4690	1.00	1.00	1.00		
63°F (17.2°C)	1400	42.0	2800	.71	.86	1.00	3190	.72	.89	1.00	38.0	3620	.74	.92	1.00	35.6	4120	.77	.96	1.00	33.0	4680	.81	1.00	1.00	33.0	4680	.81	1.00	1.00	33.0	4680	.81	1.00	1.00		
	1595	43.5	2810	.73	.91	1.00	3190	.76	.94	1.00	39.0	3620	.79	.98	1.00	36.6	4120	.81	1.00	1.00	34.2	4680	.85	1.00	1.00	34.2	4680	.85	1.00	1.00	34.2	4680	.85	1.00	1.00		
	1840	44.5	2810	.78	.97	1.00	3190	.80	1.00	1.00	40.5	3630	.83	1.00	1.00	38.0	4120	.86	1.00	1.00	35.4	4690	.91	1.00	1.00	35.4	4690	.91	1.00	1.00	35.4	4690	.91	1.00	1.00		
67°F (19.4°C)	1400	44.5	2810	.56	.69	.82	3190	.57	.70	.85	40.0	3630	.58	.72	.88	37.8	4130	.59	.74	.92	35.0	4690	.61	.78	.97	35.0	4690	.61	.78	.97	35.0	4690	.61	.78	.97		
	1595	45.5	2810	.57	.71	.87	3200	.59	.73	.90	41.5	3640	.60	.76	.93	38.5	4130	.61	.79	.98	35.8	4690	.63	.83	1.00	35.8	4690	.63	.83	1.00	35.8	4690	.63	.83	1.00		
	1840	47.0	2810	.60	.75	.93	3200	.61	.77	.96	42.0	3640	.62	.80	.99	39.5	4130	.64	.84	1.00	36.4	4700	.66	.89	1.00	36.4	4700	.66	.89	1.00	36.4	4700	.66	.89	1.00		
71°F (21.7°C)	1400	47.0	2810	.43	.55	.66	3200	.43	.55	.68	42.5	3640	.43	.57	.70	40.0	4140	.44	.58	.72	37.0	4700	.45	.60	.75	37.0	4700	.45	.60	.75	37.0	4700	.45	.60	.75		
	1595	48.0	2820	.43	.56	.69	3200	.44	.57	.71	43.5	3640	.44	.59	.73	41.0	4140	.45	.60	.76	37.8	4700	.46	.62	.80	37.8	4700	.46	.62	.80	37.8	4700	.46	.62	.80		
	1840	49.5	2820	.44	.59	.72	3210	.45	.60	.75	44.5	3650	.45	.61	.77	42.0	4150	.46	.63	.81	38.5	4710	.47	.66	.86	38.5	4710	.47	.66	.86	38.5	4710	.47	.66	.86		

### COOLING PERFORMANCE EXTENDED RATINGS

Note: Shaded area is AHRI Rating Conditions

Indoor Wet Bulb Temperature		Outdoor Air Temperature Entering Outdoor Coil																																			
		85° F (29.4° C)						95° F (35° C)						105° F (40.6° C)						115° F (46.1° C)						125° F (51.7° C)											
		Sensible To Total Ratio (S/T)			Total Cooling Capacity			Comp. Motor Watts Input			Sensible To Total Ratio (S/T)			Total Cooling Capacity			Comp. Motor Watts Input			Sensible To Total Ratio (S/T)			Total Cooling Capacity			Comp. Motor Watts Input			Sensible To Total Ratio (S/T)			Total Cooling Capacity			Comp. Motor Watts Input		
		Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C	Total Cooling Capacity kBtuh	75°F 23.9°C	80°F 26.7°C	85°F 29.4°C				
Total Air Volume cfm		<b>4SHP15LE160P-50 - BCE5C60M*4X</b>																																			
		1565	53.5	3430	.90	1.00	1.00	3860	.92	1.00	1.00	49.5	4350	.94	1.00	1.00	470	4910	.97	1.00	1.00	44.0	5580	.99	1.00	1.00	5580	.99	1.00	1.00	44.0	5580	.99	1.00	1.00		
		1800	56.0	3430	.93	1.00	1.00	3860	.96	1.00	1.00	51.5	4350	.98	1.00	1.00	48.5	4910	1.00	1.00	1.00	45.5	5570	1.00	1.00	1.00	5570	1.00	1.00	1.00	45.5	5570	1.00	1.00	1.00		
2005	58.0	3420	.97	1.00	1.00	3860	.99	1.00	1.00	53.0	4350	1.00	1.00	1.00	50.5	4910	1.00	1.00	1.00	47.0	5580	1.00	1.00	1.00	5580	1.00	1.00	1.00	47.0	5580	1.00	1.00	1.00				
1565	56.5	3430	.73	.86	.98	3860	.75	.88	1.00	51.0	4350	.76	.90	1.00	47.5	4910	.78	.94	1.00	44.5	5570	.81	.97	1.00	5570	.81	.97	1.00	44.5	5570	.81	.97	1.00				
1800	58.0	3420	.76	.90	1.00	3860	.77	.92	1.00	52.5	4350	.79	.95	1.00	49.0	4910	.82	.98	1.00	45.5	5580	.85	1.00	1.00	5580	.85	1.00	1.00	45.5	5580	.85	1.00	1.00				
2005	59.5	3420	.78	.93	1.00	3860	.80	.96	1.00	53.5	4350	.82	.99	1.00	50.5	4910	.85	1.00	1.00	47.0	5580	.88	1.00	1.00	5580	.88	1.00	1.00	47.0	5580	.88	1.00	1.00				
1565	59.5	3420	.58	.70	.83	3860	.59	.72	.85	54.0	4350	.60	.74	.87	50.5	4910	.61	.76	.90	47.0	5580	.63	.78	.94	5580	.63	.78	.94	47.0	5580	.63	.78	.94				
1800	61.0	3410	.60	.73	.86	3860	.61	.75	.89	55.0	4350	.62	.77	.92	52.0	4910	.63	.79	.95	48.0	5580	.65	.83	.99	5580	.65	.83	.99	48.0	5580	.65	.83	.99				
2005	62.5	3410	.61	.76	.90	3860	.62	.77	.92	56.5	4350	.64	.80	.95	53.0	4910	.65	.82	.99	49.0	5580	.67	.86	1.00	5580	.67	.86	1.00	49.0	5580	.67	.86	1.00				
1565	62.5	3410	.45	.57	.68	3850	.45	.57	.70	57.0	4350	.45	.58	.71	53.5	4910	.46	.60	.73	50.0	5580	.46	.61	.76	5580	.46	.61	.76	50.0	5580	.46	.61	.76				
1800	64.5	3410	.45	.59	.71	3850	.46	.59	.72	58.5	4350	.46	.60	.74	55.0	4910	.47	.62	.77	51.0	5580	.48	.64	.80	5580	.48	.64	.80	51.0	5580	.48	.64	.80				
2005	66.0	3400	.46	.60	.73	3850	.46	.61	.75	59.5	4350	.47	.62	.77	56.0	4920	.48	.64	.80	52.0	5580	.48	.66	.83	5580	.48	.66	.83	52.0	5580	.48	.66	.83				



**HEATING PERFORMANCE EXTENDED RATINGS**

**4SHP15LE118P-50 - BCE5C18M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																		
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)			-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	
525	250	21	6.2	1260	16.3	4.8	1185	11.4	3.3	1105	7.5	2.2	995	3.5	1	740				
675	320	21.7	6.4	1180	17	5	1105	12.1	3.5	1030	8.2	2.4	915	4.2	1.2	665				
710	335	21.8	6.4	1170	17.1	5	1095	12.3	3.6	1015	8.4	2.5	905	4.4	1.3	655				

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		1.18	1.17	1.15	1.13	1.12	1.11	1.08	1.06	1.05	1.03	1.02	1.01	1	0.98	0.92	0.86	0.79	0.73	0.67	0.61
Total Output	kBtuh	21.7	20.6	19.4	18.3	17.6	17	15.4	13.8	12.9	12.1	11.3	10.8	10.3	9.2	8.2	7.2	6.2	5.2	4.2	3.2
	kW	6.4	6	5.7	5.4	5.2	5	4.5	4	3.8	3.5	3.3	3.2	3	2.7	2.4	2.1	1.8	1.5	1.2	0.9

	Inputs					
	Cap		Watts		Watts	
	Low		Med		High	
CFM	525		675		710	
47°F	16900.354		1192.286		17606.696	
35°F	---		---		13775.951	
17°F	---		---		10801.403	

**4SHP15LE124P-50 - BCE5C24M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																		
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)			-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	
680	320	26.2	7.7	1510	20.5	6	1445	14.6	4.3	1375	10.3	3	1255	4.9	1.4	935				
875	415	26.9	7.9	1420	21.3	6.2	1350	15.3	4.5	1280	11	3.2	1165	5.6	1.6	840				
915	430	27	7.9	1405	21.4	6.3	1335	15.4	4.5	1270	11.1	3.3	1150	5.7	1.7	825				

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		1.42	1.41	1.39	1.37	1.36	1.35	1.33	1.31	1.29	1.28	1.27	1.27	1.26	1.25	1.17	1.08	1	0.92	0.84	0.76
Total Output	kBtuh	26.9	25.6	24.3	23	22.2	21.3	19	16.7	16	15.3	14.7	14.3	13.7	12.4	11	9.7	8.3	7	5.6	4.3
	kW	7.9	7.5	7.1	6.7	6.5	6.2	5.6	4.9	4.7	4.5	4.3	4.2	4	3.6	3.2	2.8	2.4	2.1	1.6	1.3

	Inputs					
	Cap		Watts		Watts	
	Low		Med		High	
CFM	680		875		915	
47°F	21467.016		1454.642		22183.983	
35°F	---		---		16660.501	
17°F	---		---		14252.452	

**HEATING PERFORMANCE EXTENDED RATINGS**

**4SHP15LE130P-50 - BCE5C30M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																		
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)			-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	
845	400	31.9	9.3	1870	25.1	7.4	1765	18	5.3	1660	12.9	3.8	1485	6.2	1.8	1105	6.2	1.8	1105	
1025	485	32.7	9.6	1780	25.9	7.6	1675	18.7	5.5	1570	13.6	4	1395	6.9	2	1010	6.9	2	1010	
1150	545	33.1	9.7	1735	26.3	7.7	1630	19.2	5.6	1525	14	4.1	1350	7.3	2.1	965	7.3	2.1	965	

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		1.78	1.76	1.73	1.7	1.69	1.68	1.65	1.63	1.6	1.57	1.55	1.53	1.52	1.49	1.4	1.3	1.21	1.11	1.01	0.92
Total Output	kBtuh	32.7	31.1	29.5	27.9	27	25.9	23.1	20.3	19.5	18.7	18	17.5	16.9	15.3	13.6	11.9	10.3	8.6	6.9	5.2
	kW	9.6	9.1	8.6	8.2	7.9	7.6	6.8	5.9	5.7	5.5	5.3	5.1	5	4.5	4	3.5	3	2.5	2	1.5

	Inputs					
	Cap		Watts		Watts	
	Low		Med		High	
CFM	845		1025		1150	
47°F	26232.35		1774.885		26984.668	
35°F	---		---		20291.075	
17°F	---		---		17491.005	

**4SHP15LE136P-50 - BCE5C36M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																		
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)			-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	
1050	495	37.2	10.9	2225	29.3	8.6	2085	21.1	6.2	1945	14.8	4.3	1750	7.2	2.1	1290	7.2	2.1	1290	
1201	565	37.9	11.1	2155	30	8.8	2015	21.8	6.4	1875	15.5	4.5	1680	7.9	2.3	1220	7.9	2.3	1220	
1350	635	38.4	11.3	2095	30.5	8.9	1960	22.3	6.5	1815	16	4.7	1620	8.4	2.5	1160	8.4	2.5	1160	

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		2.16	2.12	2.09	2.06	2.04	2.02	1.97	1.92	1.9	1.88	1.85	1.84	1.83	1.79	1.68	1.57	1.45	1.34	1.22	1.11
Total Output	kBtuh	37.9	36	34.1	32.3	31.2	30	27	24.1	23	21.8	20.7	20	19.2	17.4	15.5	13.6	11.7	9.8	7.9	6
	kW	11.1	10.6	10	9.5	9.1	8.8	7.9	7.1	6.7	6.4	6.1	5.9	5.6	5.1	4.5	4	3.4	2.9	2.3	1.8

	Inputs					
	Cap		Watts		Watts	
	Low		Med		High	
CFM	1050		1201		1350	
47°F	30449.502		2105.323		31158.564	
35°F	---		---		24095.877	
17°F	---		---		19986.457	

**HEATING PERFORMANCE EXTENDED RATINGS**

**4SHP15LE142P-50 - BCE5C42M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																			
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)				-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW		
1225	580	47	13.8	3225	37.3	10.9	2920	27	7.9	2600	19.8	5.8	2330	9.7	2.8	1745					
1400	660	47.7	14	3090	38	11.1	2790	27.7	8.1	2470	20.5	6	2200	10.4	3	1610					
1575	745	48.4	14.2	2990	38.7	11.3	2690	28.5	8.4	2365	21.2	6.2	2100	11.1	3.3	1510					

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		3.09	3.03	2.96	2.89	2.85	2.79	2.65	2.5	2.49	2.47	2.45	2.44	2.42	2.35	2.2	2.06	1.91	1.76	1.61	1.47
Total Output	kBtuh	47.7	45.4	43.2	41	39.6	38	33.8	29.7	28.7	27.7	26.8	26.2	25.3	23	20.5	18	15.4	12.9	10.4	7.9
	kW	14	13.3	12.7	12	11.6	11.1	9.9	8.7	8.4	8.1	7.9	7.7	7.4	6.7	6	5.3	4.5	3.8	3	2.3

	Inputs								
	Cap	Watts		Cap	Watts				
	Low		Med		High				
	CFM	1225		1400		1575			
47°F	38902.389	2980.237		39611.371	2847.871		40345.129	2747.396	
35°F	---	---		29698.136	2500.615		---	---	
17°F	---	---		26173.516	2441.262		---	---	

**4SHP15LE148P-50 - BCE5C48M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																			
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)				-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW		
1400	660	55.9	16.4	3715	43.5	12.7	3355	30.6	9	2980	21.5	6.3	2625	10.6	3.1	1965					
1596	755	56.7	16.6	3570	44.3	13	3210	31.4	9.2	2835	22.3	6.5	2485	11.4	3.3	1825					
1840	870	57.4	16.8	3445	45	13.2	3085	32.1	9.4	2710	23	6.7	2355	12.1	3.5	1695					

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		3.57	3.49	3.41	3.32	3.27	3.21	3.07	2.93	2.88	2.84	2.79	2.77	2.73	2.65	2.49	2.32	2.16	1.99	1.83	1.66
Total Output	kBtuh	56.7	53.8	51	48.1	46.3	44.3	39.4	34.4	32.9	31.4	29.9	29	27.9	25	22.3	19.6	16.9	14.1	11.4	8.7
	kW	16.6	15.8	14.9	14.1	13.6	13	11.5	10.1	9.6	9.2	8.8	8.5	8.2	7.3	6.5	5.7	5	4.1	3.3	2.5

	Inputs								
	Cap	Watts		Cap	Watts				
	Low		Med		High				
	CFM	1400		1596		1840			
47°F	45521.163	3412.831		46347.869	3269.071		47041.884	3141.312	
35°F	---	---		34352.781	2924.166		---	---	
17°F	---	---		29049.513	2764.974		---	---	

**HEATING PERFORMANCE EXTENDED RATINGS**

**4SHPI5LE160P-50 - BCE5C60M\*4X**

Indoor Coil Air Volume 70°F db (28°C db)		Air Temperature Entering Outdoor Coil																		
		65°F (18°C)				45°F (7°C)				25°F (-4°C)				5°F (-15°C)			-15°F (-28°C)			
		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input		Total Heating Capacity		Comp. Motor Watts Input	Total Heating Capacity		Comp. Motor Watts Input	
CFM	L/s	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	kBtuh	kW	
1565	740	65	19	4310	50.9	14.9	3955	35.8	10.5	3600	26.6	7.8	3125	13	3.8	2335				
1800	850	66	19.3	4130	51.9	15.2	3780	36.9	10.8	3425	27.7	8.1	2950	14.1	4.1	2160				
2005	945	66.8	19.6	4020	52.7	15.4	3665	37.7	11	3310	28.5	8.4	2835	14.9	4.4	2045				

Outdoor Temp.	°F	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10	-15	-20
	°C	18	16	13	10	8	7	4	2	-1	-4	-7	-8	-9	-12	-15	-18	-21	-23	-26	-29
Compressor Motor kW Input		4.13	4.05	3.96	3.87	3.81	3.78	3.7	3.62	3.52	3.43	3.33	3.27	3.24	3.15	2.95	2.75	2.56	2.36	2.16	1.97
Total Output	kBtuh	66	62.8	59.7	56.5	54.6	51.9	45.3	38.6	37.8	36.9	36	35.5	34.3	31.1	27.7	24.3	20.9	17.5	14.1	10.7
	kW	19.3	18.4	17.5	16.6	16	15.2	13.3	11.3	11.1	10.8	10.6	10.4	10.1	9.1	8.1	7.1	6.1	5.1	4.1	3.1

	Inputs									
	Cap	Watts		Cap	Watts					
	Low		Med		High					
	CFM	1565		1800		2005				
47°F	53531.181	3985.299		54579.041		3809.621		55397.739	3695.816	
35°F	---	---		38609.755		3618.114		---	---	
17°F	---	---		35526.852		3272.006		---	---	



1-800-448-5872

All specifications and illustrations subject to change without notice and without incurring obligations.