



M-SERIES™



SELF-CONTAINED HEATING AND COOLING UNITS
DESIGNED FOR PERFORMANCE AND FLEXIBILITY.



MAGIC-PAK® MAKES EVERY JOB EASIER.

Magic-Pak M-Series™ heating and cooling units are the ideal choice for multifamily buildings. The perfect combination of performance, convenience and flexibility, these self-contained units are simple to install and easy to maintain.

Made to work, designed to fit.

Plug-and-play design

saves time and money during installation.

Forward-facing components


make units easy to access from one location.

Self-contained design

reduces commissioning time at building completion.

No outdoor elements

such as refrigerant lines or condensing units are needed.

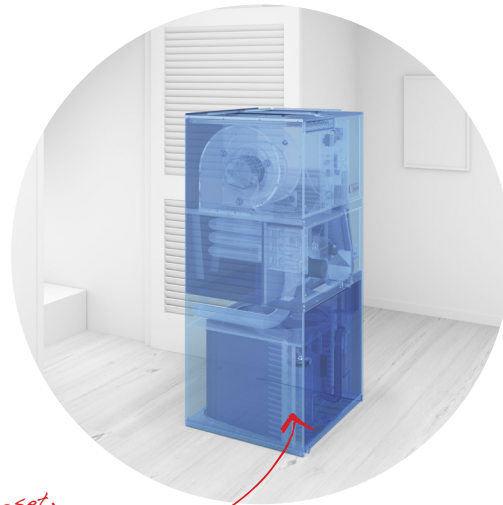

Concealed in a closet, the M-Series unit is easily accessible for maintenance.

Simplifying the specification and installation process.

All-in-one, compact units

simplify specification during the design phase.

Internally fastened units

reduce the need for external base pads, chaseways and utility connections.

Uniform design offers consistency

from room to room and floor to floor, reducing installation time and costs.



1. Self-contained unit arrives.



Maintaining the building's design.

Compact design


minimizes building penetration.

Maintains indoor design aesthetic

with closet-mounted units installed discreetly out of sight.

Customizable exterior louvers

extend creative possibilities, without compromising the building's façade.

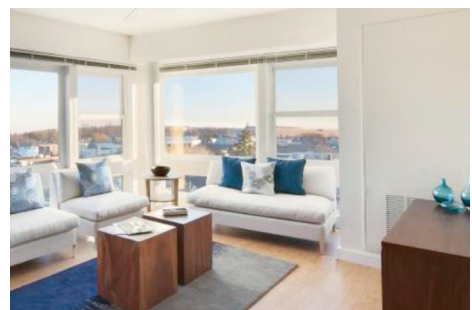

2.) Plug-and-play installation.

3.) Installation complete.

4.) Out of sight, out of mind.

INSIDE MAGIC-PAK®

M-Series™


- Available in 0.75-, 1-, 1.5-, 2-, 2.5- and 3-ton capacities
- Minimum 11 EER efficiency rating on all units
- Convenient toolless filter access
- Optional Climate Guard™ epoxy-coated coils
- Standard stainless-steel heat exchanger on MGE model
- Top supply and return ducting
- Factory-installed evaporator drain float switch
- Factory-installed ventilation capabilities
- 5-year limited warranty on parts
- 20-year warranty on stainless-steel heat exchanger



ELECTRIC/ELECTRIC

MCE MODEL


Electric heating range of 3 – 10 KW;
cooling range of 8,600 – 34,800 BTU/HR



GAS/ELECTRIC

MGE MODEL

Gas heating range of 15,000 – 60,000 BTU/HR;
cooling range of 8,600 – 34,200 BTU/HR



ELECTRIC HEAT PUMP

MHP MODEL

A COP of 3.3; Electric heating range of 3.6 – 9.6 KW;
cooling range of 8,600 – 34,600 BTU/HR

To learn more about the new self-contained M-Series™ heating and cooling units or how Magic-Pak® can benefit your next project, visit our website at magic-pak.com.

