
## **Dimensions** (approximate)

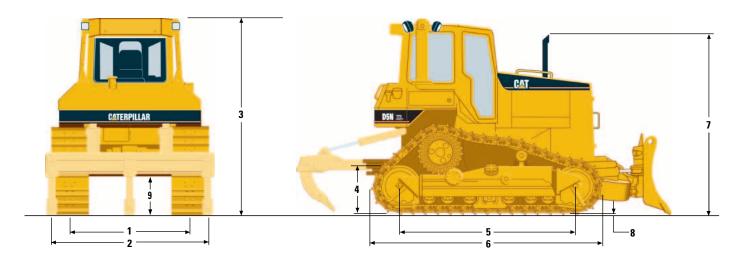

## **Tractor Dimensions**

		Х	(L	L	.GP
1	Track gauge	1770 mm	70 in	2000 mm	79 in
2	Width of tractor				
	With the following attachments:				
	Standard shoes without blade	2330 mm	92 in	2760 mm	109 in
	Standard shoes with VPAT blade angled 25 $^\circ$	2797 mm	110 in	3043 mm	120 in
3	Machine height from tip of grouser:				
	With the following equipment:	-	_		_
	ROPS canopy	2992 mm	118 in	3036 mm	119.5 in
	ROPS cab	2995 mm	118 in	3039 mm	119.6 in
4	Drawbar height (center of clevis)				
	From ground face of shoes	486 mm	19 in	537 mm	21 in
5	Length of track on ground	2388 mm	94 in	2604 mm	103 in
6	Length of basic tractor (with drawbar)	3544 mm	140 in	3720 mm	146 in
	With the following attachments,				
	add to basic tractor length:	_	_		
	Ripper	818 mm	32 in	818 mm	32 in
	PA55 winch	381 mm	15 in	381 mm	15 in
	VPAT blades, straight	1011 mm	40 in	1344 mm	53 in
	VPAT blade, angled 25 $^\circ$	1542 mm	61 in	1779 mm	70 in
7	Height over stack from tip of grouser	2805 mm	110 in	2849 mm	112 in
8	Height of grouser	47 mm	1.85 in	47 mm	1.85 in
9	Ground clearance from ground face of shoe (per SAE J1234)	<b>378</b> mm	14.9 in	<b>422</b> mm	16.6 in

## **Bulldozer Specifications**

		(XL) 5 VPAT Blade	(LGP) 5 VPAT Blade
Blade capacity (SAE J1265)	m <sup>3</sup>	2.6	2.6
	yd <sup>3</sup>	3.4	3.4
Blade width (over end bits)	mm	3077	3360
	in	121	132
Blade height	mm	1109	1127
-	in	43.7	44.3
Digging depth	mm	430	415
	in	16.9	16.3
Ground clearance	mm	933	1001
	in	36.7	39.3
Maximum tilt	mm	460	491
	in	18.1	19.3
Weight (without hyd. controls)	kg	1932	2000
-	lb	4259	4409

## **Ripper Specifications**

		XL	LGP
Beam width	mm	1951	1951
	in	76.8	76.8
Cross section	mm	$165 \times 211$	165 × 211
	in	$6.5 \times 8.3$	$6.5 \times 8.3$
Ground clearance under beam (raised)	mm	895	949
	in	35.2	37.4
Under tip at full raise	mm	482	536
	in	19	21.1
Number of pockets (teeth)		3	3
Maximum penetration	mm	350	298
-	in	13.8	11.7
Maximum pryout force	N	191 260	192 600
	lb	43,034	43,335
Maximum penetration force	N	40 100	46 690
(VPAT blade equipped power shift)	lb	9023	10,505
Weight:			
With three teeth	kg	758	758
	lb	1671	1671
Each tooth	kg	34	34
	lb	75	75