

Cat® Articulated Truck Bare Chassis



Base Model	Engine Model	Gross Power SAE J1995		Net Power SAE J1349	
725	Cat® C11 ACERT™	230 kW	309 hp	225 kW	301 hp
730	Cat C11 ACERT	242 kW	325 hp	237 kW	317 hp
735 *	Cat C15 ACERT	324 kW	435 hp	313 kW	419 hp
740 *	Cat C15 ACERT	350 kW	469 hp	338 kW	453 hp


Base Model	Engine Model	Gross Power SAE J1995		Net Power ISO 14396	
735B (HRC)	Cat C15 ACERT	337 kW	452 hp	333 kW	447 hp
735B (LRC)	Cat C15 ACERT	336 kW	450 hp	330 kW	442 hp
740B (HRC)	Cat C15 ACERT	365 kW	489 hp	361 kW	484 hp
740B (LRC)	Cat C15 ACERT	361 kW	484 hp	356 kW	477 hp

Caterpillar offers a full line of articulated truck (AT) bare chassis to support a variety of specialty-machine applications.


*Noncurrent model



Cat® Articulated Truck Bare Chassis

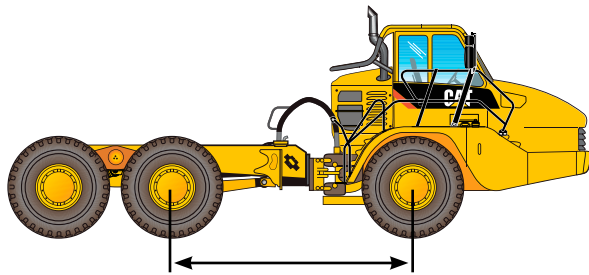

Standard Wheel Base

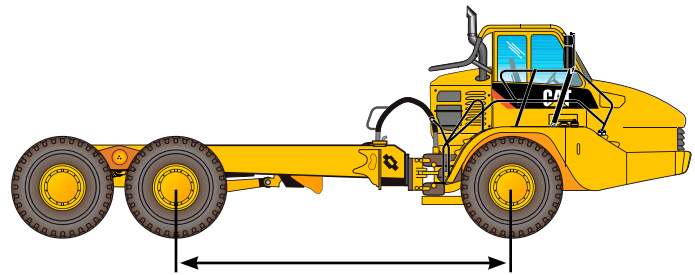

Long Wheel Base

Base Model	Standard Wheel Base				Long Wheel Base			
	Rated Load		Wheel Base Length		Rated Load		Wheel Base Length	
	tonnes	tons	mm	in	tonnes	tons	mm	in
725 with Hoist	27.0	29.8	3818	150.3	26.2	28.8	5305	208.9
725 no Hoist	27.4	30.2	3818	150.3	26.8	29.5	5305	208.9
730 with Hoist	31.8	35.1	3818	150.3	30.6	33.8	5305	208.9
730 no Hoist	32.2	35.5	3818	150.3	31.2	34.4	5305	208.9
735* with Hoist	37.0	40.8	4244	167.1	35.8	39.5	5800	228.3
735* no Hoist	37.3	41.1	4244	167.1	36.4	40.1	5800	228.3
740* with Hoist	44.6	49.2	4244	167.1	43.4	47.8	5800	228.3
740* no Hoist	45.0	49.6	4244	167.1	44.0	48.4	5800	228.3
735B HRC/LRC with Hoist	38.2	42.1	4246	167.2	37.0	40.8	5802	228.4
735B HRC/LRC no Hoist	38.6	42.6	4246	167.2	37.7	41.5	5802	228.4
740B HRC/LRC with Hoist	47.0	51.8	4246	167.2	45.8	50.5	5802	228.4
740B HRC/LRC no Hoist	47.5	52.3	4246	167.2	46.5	51.2	5802	228.4

* Noncurrent model

Count on Cat to provide a proven, high-performance and durable platform ... while letting OEMs focus on their custom attachment expertise.

Ranging from standard to long wheel base rear frames, Cat AT Bare Chassis support a number of applications such as large-volume coal or trash dump bodies, water tanks, fuel and lube trucks, and other unique machines requiring high mobility. Caterpillar works with Cat dealers and OEMs to determine the best possible solutions for mounting a variety of implements and bodies onto the Cat AT Bare Chassis, providing the knowledge and support to assist with application and integration. These machines are available with and without hoist cylinders.

Customer support is our focus. You can count on the Caterpillar global distribution and support system wherever you, your machines or your customers are located. Cat dealer service parts availability provides the quick turnaround customers expect.

For more details, visit OEM Solutions today at: www.cat.com/oemsolutions

WEDQ1014-01
www.cat.com

© 2012 Caterpillar • All Rights Reserved • Printed in USA
CAT, CATERPILLAR, ACERT, their respective logos, "Caterpillar Yellow" and the "POWER EDGE" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

