




Cat[®] Pipe & Pole Forks

930–972 WHEEL LOADERS

Pipe & Pole Forks feature a wide carriage, fixed tines and a full-width, double-acting clamp. Available with pin-on interface or for use with the Fusion™ Coupler System.

Contact your Cat[®] dealer for more information.

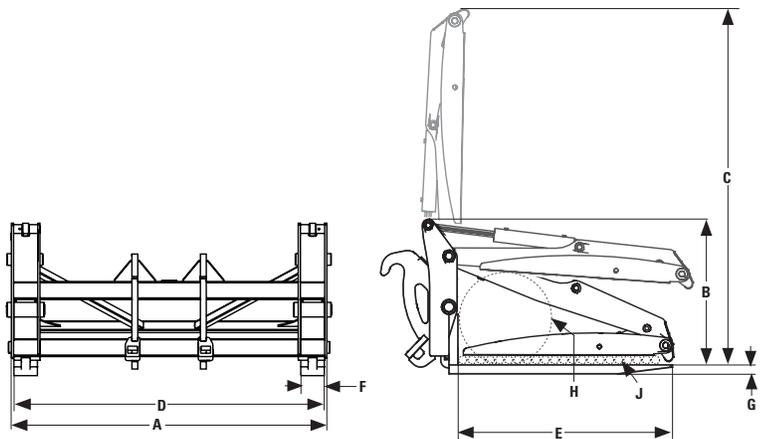

Pin-on

	(A) Carriage Width		(B) Carriage Height (with clamp closed)		(C) Carriage Height (with clamp open)		(D) Width Over Tines		(E) Tine Length		(F) Tine Width		(G) Tine Thickness	
	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)
950/962 K	2,731	(108)	1,245	(49)	3,031	(119)	2,686	(106)	1,829	(72)	203	(8.0)	76	(3.0)
950/962 H	2,731	(108)	1,245	(49)	3,031	(119)	2,686	(106)	1,829	(72)	203	(8.0)	76	(3.0)
966/972 K/H/GII	3,131	(123)	1,464	(58)	3,844	(151)	2,991	(118)	2,438	(96)	203	(8.0)	90	(3.5)

	Fork Weight		Pipe Diameter				Tine Lift Capacity		Active-Clamp Tine Lift Capacity*		Operating Pressure	
	kg	(lb)	Max. (H)		Min. (J)		kg	(lb)	kg	(lb)	kPa	(psi)
950/962 K	2,041	(4,500)	762	(30)	51	(2)	11,793	(26,000)	7,076	(15,600)	15,513	(2,250)
950/962 H	2,021	(4,456)	762	(30)	51	(2)	11,793	(26,000)	7,076	(15,600)	15,513	(2,250)
966/972 K/H/GII	3,003	(6,622)	914	(36)	51	(2)	12,701	(28,000)	7,620	(16,800)	15,513	(2,250)


*When top clamp is continuously supplied with 2,250 psi tire rating is decreased at 36" load center per pair.



Americas North



Cat Pipe & Pole Forks

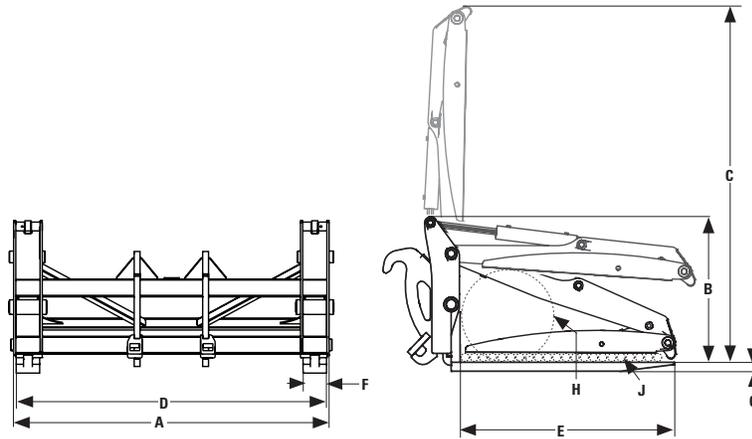

Fusion

	(A) Carriage Width		(B) Carriage Height (with clamp closed)		(C) Carriage Height (with clamp open)		(D) Width Over Tines		(E) Tine Length		(F) Tine Width		(G) Tine Thickness	
	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)
930 H/G	2,731	(108)	1,245	(49)	3,031	(119)	2,686	(106)	1,829	(72)	180	(7.1)	65	(2.6)
938 H/GII	2,731	(108)	1,245	(49)	3,031	(119)	2,686	(106)	1,829	(72)	203	(8.0)	76	(3.0)
950/962 K/H	2,731	(108)	1,245	(49)	3,031	(119)	2,686	(106)	1,829	(72)	203	(8.0)	76	(3.0)
966/972 K/H/GII	3,131	(123)	1,464	(58)	3,844	(151)	2,991	(118)	2,438	(96)	203	(8.0)	90	(3.5)

	Fork Weight		Pipe Diameter				Tine Lift Capacity		Active-Clamp Tine Lift Capacity*		Operating Pressure	
			Max. (H)		Min. (J)							
	kg	(lb)	mm	(in)	mm	(in)	kg	(lb)	kg	(lb)	kPa	(psi)
930 H/G	1,724	(3,800)	762	(30)	51	(2)	8,763	(19,320)	5,262	(11,600)	15,513	(2,250)
938 H/GII	2,066	(4,556)	762	(30)	51	(2)	11,793	(26,000)	7,076	(15,600)	15,513	(2,250)
950/962 K/H	2,066	(4,556)	762	(30)	51	(2)	11,793	(26,000)	7,076	(15,600)	15,513	(2,250)
966/972 K/H/GII	3,003	(6,622)	914	(36)	51	(2)	12,701	(28,000)	7,620	(16,800)	15,513	(2,250)

*When top clamp is continuously supplied with 2,250 psi tine rating is decreased at 36" load center per pair.

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

GEHQ0036 (02-14)

©2014 Caterpillar
All Rights Reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

