




Cat[®] Fusion™ Material Handling Arms

950–972 WHEEL LOADERS

Telescoping inner boom is pre-drilled for six different reach lengths. Contact your Cat[®] dealer for more information.

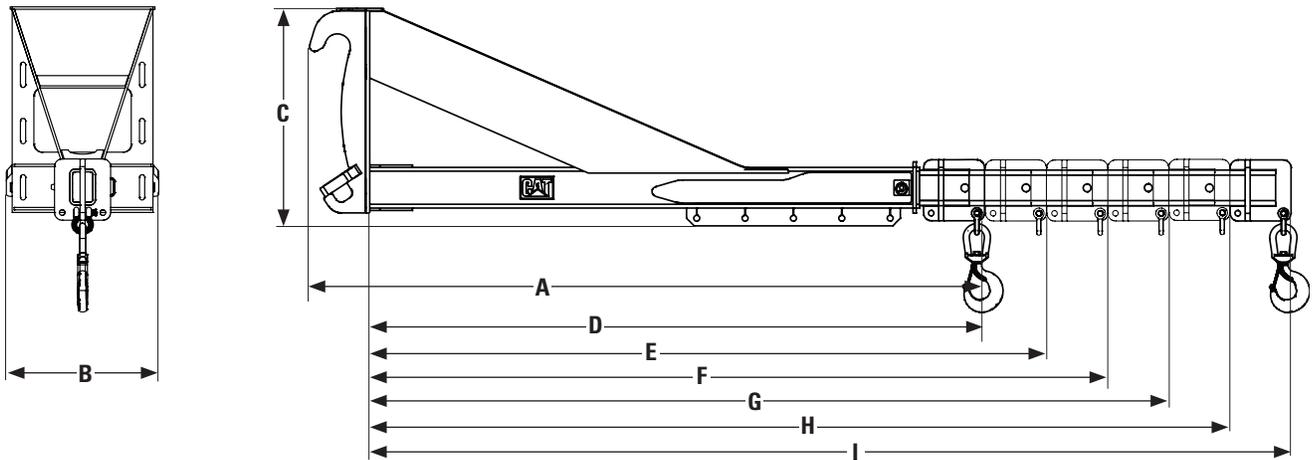

Max Arm Rating	(A) Length		(B) Width		(C) Height		Weight		
	kg	(lb)	mm	(in)	mm	(in)	kg	(lb)	
8,616	(19,000)	3,361	(132)	758	(30)	1,087	(43)	707	(1,560)

Extension Range					
(D) Extension 1	(E) Extension 2	(F) Extension 3	(G) Extension 4	(H) Extension 5	(I) Extension 6
mm	(in)	mm	(in)	mm	(in)
3,061	(120)	3,365	(132)	3,670	(144)
				3,975	(156)
				4,280	(168)
				4,585	(180)



Americas North



Cat Material Handling Arms

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

GEHQ0040 (02-14)

©2014 Caterpillar
All Rights Reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

