

# 236D/242D/246D/262D

Skid Steer Loaders



## Cat® C3.3B DIT (Turbo) Engine

|                                 | 236D    |          | 242D    |          | 246D    |          | 262D    |          |
|---------------------------------|---------|----------|---------|----------|---------|----------|---------|----------|
| Gross Power (SAE J1995)         | 55.4 kW | 74.3 hp  |
| <b>Weights</b>                  |         |          |         |          |         |          |         |          |
| Operating Weight                | 2975 kg | 6,559 lb | 3166 kg | 6,980 lb | 3368 kg | 7,424 lb | 3634 kg | 8,011 lb |
| <b>Operating Specifications</b> |         |          |         |          |         |          |         |          |
| Rated Operating Capacity        | 818 kg  | 1,800 lb | 975 kg  | 2,150 lb | 975 kg  | 2,150 lb | 1225 kg | 2,700 lb |

## 236D/242D/246D/262D Features

### Industry Leading Cab

*One piece, modular design provides a premium sealed and pressurized cab for a cleaner and quieter operating environment with excellent all around visibility.*

### Superior Power

*High performance power train provides maximum performance with features such as Electronic Torque Management system, optional two speed and an industry exclusive hand/foot throttle with decel pedal capability.*

### Powerful Hydraulics

*High flow hydraulic system available for applications that demand maximum hydraulic work tool performance.*

### Outstanding Performance

*Cat Intelligent Leveling (ILEV) system enables industry leading features such as electronic self level, return-to-dig and work tool positioner.*

### Versatility

*Do more with one machine with the broad range of Cat Work Tools, built to get the most out of your machine.*

### Contents

|                          |    |
|--------------------------|----|
| Operator Station.....    | 4  |
| Power Train.....         | 6  |
| Lift Linkages.....       | 6  |
| Hydraulics.....          | 7  |
| Attachments.....         | 8  |
| Serviceability.....      | 9  |
| Customer Support.....    | 9  |
| Specifications.....      | 10 |
| Standard Equipment.....  | 14 |
| Mandatory Equipment..... | 15 |
| Optional Equipment.....  | 15 |





**Experience the difference of a Cat Skid Steer Loader. Spacious operator station features ergonomic joystick controls, ample leg room and an available high back, heated, air ride seat to keep you comfortable all day long. Built for outstanding performance, comfort and versatility, the Cat D Series Skid Steer Loaders help you get more done to improve your bottom line.**

# Operator Station

Spacious working environment for all day comfort.




## Base Display

The standard control monitor provides a single-code security to help prevent theft and unwanted operation.

## Best Seat on the Job Site

High back, heated, air ride seat available in both cloth and vinyl.

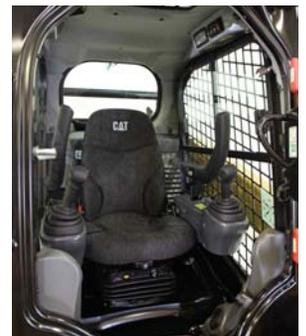



## Superior Comfort

The Cat D Series sets a new standard in operator comfort. The wide, spacious interior and uncluttered floor helps you work comfortably and productively all day long. Features include:

- One piece, modular design provides a premium sealed and pressurized cab for cleaner and quieter working environment
- High back, heated, air ride seat with seat-mounted joystick controls for added comfort (option)
- Clear sight lines provide excellent visibility
- Air conditioner and heater for greater comfort in all climates (option)
- Ample leg room
- Selectable Pattern Control which allows the operator to select the control pattern they are most familiar with for greater productivity (option)

## Advanced Display Panel

The optional Advanced Display lets you customize your machine performance to your needs by offering the ultimate in operator control features and functionality. This easy to read 127 mm (5 in) LCD display puts machine information at your fingertips. It provides on screen adjustments to working parameters and preferences such as implement response adjustment, drive response adjustment, creep setting, ride control activation speed, top speed limit setting, language, background color and gauge display style. All parameters can be customized and retained for each individual operator's code. It also provides:

- Security system to prevent unauthorized machine usage
- Capability to program up to 50 operator codes to store and recall each operator's preferences and working parameters, allowing the machine to be tailored to experience level and application
- Integrated rearview camera for additional job site visibility (option)





*Vertical Lift Linkage*



*Radial Lift Linkage*

## Lift Linkages

### Choice of lift designs.

Two types of lifting arrangement are available – vertical lift and radial lift – to meet your specific application needs.

#### **Vertical Lift**

The 242D and 262D feature the vertical lift design which provides extended reach and lift height for material handling or quick and easy truck loading.

#### **Radial Lift**

The 236D and 246D feature the radial lift design which delivers excellent digging performance and superior mid-lift reach.

# Power Train

## Aggressive performance.

#### **Cat Engine**

The rugged and reliable Cat C3.3B engine delivers high horsepower and torque to match your performance and application needs.

#### **Cat Intelligent Leveling (ILEV) System**

The exclusive Cat Intelligent Leveling System takes machine performance to a new level and provides industry leading features such as:

- Electronic snubbing that automatically cushions the descent of the lift arms, slowing the downward motion just before the arms reach their stops
- Return-to-dig which allows the operator to pre-set the digging angle of the bucket and then automatically lowers the lift arms and recalls the bucket angle
- Work Tool Positioner which allows the angle of the work tool (bucket, box rake, cold planer, forks, trencher, etc.) to be pre-set and then automatically recalled if the machine is repositioned, increasing productivity

#### **Electronic Throttle**

New electronic dial-type throttle lets you set precise RPM setting. When the dial is in the high-idle position, the foot throttle functions as a decelerator pedal. This gives you greater control, allowing you to quickly adjust the travel speed during precise maneuvers or to regulate engine speed when using hydro-mechanical work tools. A new throttle-smoothing feature monitors the accelerator pedal's movement under the operator's foot when traveling over rough terrain and adjusts to provide a steadier, more even travel speed.





# Performance

Solutions for a wide range of applications.

## High Performance Hydraulic System

Maximum power and reliability are built into the Cat hydraulic system to help you get the job done faster. The hydraulic system features outstanding lift and breakout forces. The continuous demand fan provides improved fuel efficiency and increased horsepower.

## High Flow Hydraulic Systems

High Flow (236D/242D) and High Flow XPS (246D/262D) hydraulic systems are available for applications that demand maximum work tool performance.

## Two Speed Option

Increase your productivity with the optional Two Speed.

## Ride Control

The optional Speed Sensitive Ride Control system delivers a smoother ride on uneven terrain for superior comfort, higher speed operation and better material retention.

# Attachments

Do more jobs with one machine using Cat Work Tools.

## The Right Tool for the Job

Designed and built for optimum performance and durability, Cat Work Tools deliver high productivity in a variety of applications to maximize versatility:

- Augers
- Backhoes
- Blades (angle, dozer)
- Buckets (general purpose, high capacity, dirt, utility, light material, multi purpose, industrial grapple, utility grapple)
- Brooms (angle, pickup, utility)
- Brushcutters
- Cold Planers
- Forks (pallet, industrial grapple, utility grapple, utility)
- Hydraulic Hammers
- Landscape Tillers
- Landscape Rakes
- Material Handling Arm
- Mulchers
- Power Box Rakes
- Sectional Snow Push
- Shear
- Snow Blowers
- Stump Grinders
- Trenchers
- Vibratory Compactors
- Wheel Saws

## Quick Couplers

Work tools can be changed quickly and easily with the Cat Skid Steer Loader's quick coupler system. The standard quick coupler features manual engagement and disengagement of work tools using two high leverage handles. The optional electric quick coupler allows the operator to quickly change tools without leaving the cab.




# Serviceability

Easy maintenance helps keep your machine working.

## Minimize Your Downtime

Convenient service features make maintenance easy, reducing your downtime:

- Unmatched ground level access to all routine service points
- Wide opening rear door for easy access to both sides of the engine
- Electric priming pump with automatic air bleed for the fuel system eliminates the need to pre-fill filters with fuel, reducing the risk of contaminants
- Cat Product Link™ system provides remote reporting of machine location and operating system parameters (optional)

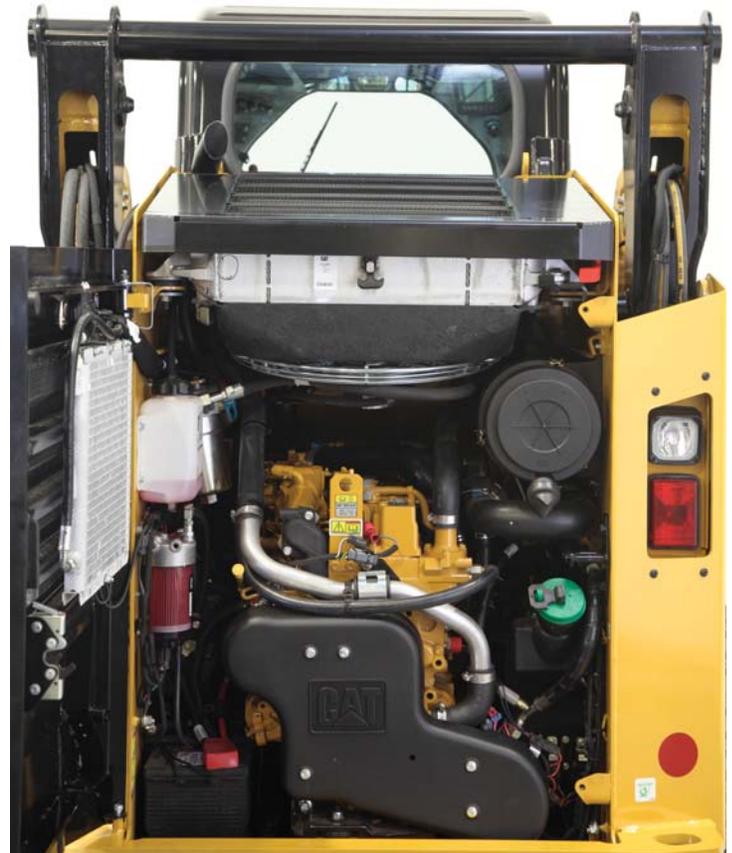

## Customer Support

Unmatched support makes the difference.



## Renowned Dealer Support

From helping you choose the right machine to knowledgeable ongoing support, Cat dealers provide the best in sales and service.

- Preventive maintenance programs and guaranteed maintenance contracts
- Best-in-class parts availability
- Operator training to help boost your profits
- Genuine Cat Remanufactured parts

# 236D/242D/246D/262D Skid Steer Loaders Specifications

## Engine

| Engine Model            | Cat C3.3B DIT (turbo) |                     |
|-------------------------|-----------------------|---------------------|
| Gross Power (SAE J1995) |                       |                     |
| 236D/242D               | 55.4 kW               | 74.3 hp             |
| 246D/262D               | 55.4 kW               | 74.3 hp             |
| Net Power (SAE 1349)    |                       |                     |
| 236D/242D               | 53.8 kW               | 72.1 hp             |
|                         | 54.2 kW†              | 72.7 hp†            |
| 246D/262D               | 53.6 kW               | 71.8 hp             |
|                         | 54.0 kW†              | 72.4 hp†            |
| Net Power (ISO 9249)    |                       |                     |
| 236D/242D               | 54.3 kW               | 72.8 hp             |
|                         | 54.8 kW†              | 73.5 hp†            |
| 246D/262D               | 53.1 kW               | 72.6 hp             |
|                         | 54.6 kW†              | 73.2 hp†            |
| Displacement            | 3.3 L                 | 203 in <sup>3</sup> |
| Stroke                  | 120 mm                | 4.7 in              |
| Bore                    | 94 mm                 | 3.7 in              |

† Tier 4 Interim equivalent engine offered only for Canada, Australia/New Zealand, Macedonia, Ukraine and South Korea.

## Weights\*

| Operating Weight |         |          |
|------------------|---------|----------|
| 236D             | 2975 kg | 6,559 lb |
| 242D             | 3166 kg | 6,980 lb |
| 246D             | 3368 kg | 7,424 lb |
| 262D             | 3634 kg | 8,011 lb |

## Power Train

| Travel Speed (Forward or Reverse) |           |          |
|-----------------------------------|-----------|----------|
| One Speed                         |           |          |
| 236D                              | 11.2 km/h | 7.0 mph  |
| 242D                              | 12.1 km/h | 7.5 mph  |
| 246D/262D                         | 12.5 km/h | 7.7 mph  |
| Two Speed Option                  |           |          |
| 236D                              | 17.1 km/h | 10.6 mph |
| 242D                              | 18.5 km/h | 11.5 mph |
| 246D/262D                         | 17.7 km/h | 11.0 mph |

## Operating Specifications\*

| Rated Operating Capacity                             |         |          |
|--|---------|----------|
| 236D   | 818 kg  | 1,800 lb |
| 242D   | 975 kg  | 2,150 lb |
| 246D   | 975 kg  | 2,150 lb |
| 262D   | 1225 kg | 2,700 lb |
| Rated Operating Capacity with Optional Counterweight |         |          |
| 236D   | 900 kg  | 2,000 lb |
| 242D   | 1066 kg | 2,350 lb |
| 246D   | 1088 kg | 2,400 lb |
| 262D   | 1338 kg | 2,950 lb |
| Tipping Load   |         |          |
| 236D   | 1633 kg | 3,600 lb |
| 242D   | 1950 kg | 4,300 lb |
| 246D   | 1950 kg | 4,300 lb |
| 262D   | 2449 kg | 5,400 lb |
| Breakout Force, Tilt Cylinder                        |         |          |
| 236D   | 2302 kg | 5,074 lb |
| 242D   | 2283 kg | 5,034 lb |
| 246D   | 3336 kg | 7,355 lb |
| 262D   | 3336 kg | 7,355 lb |

# 236D/242D/246D/262D Skid Steer Loaders Specifications

## Hydraulic System – 236D and 242D

| Hydraulic Flow – Standard         |            |            |
|-----------------------------------|------------|------------|
| Loader Hydraulic Pressure         | 23 000 kPa | 3,335 psi  |
| Loader Hydraulic Flow             | 76 L/min   | 20 gal/min |
| Hydraulic Power (calculated)      | 29 kW      | 39 hp      |
| Hydraulic Flow – High Flow        |            |            |
| Maximum Loader Hydraulic Pressure | 23 000 kPa | 3,335 psi  |
| Maximum Loader Hydraulic Flow     | 112 L/min  | 30 gal/min |
| Hydraulic Power (calculated)      | 43 kW      | 58 hp      |

## Hydraulic System – 246D and 262D

| Hydraulic Flow – Standard         |            |            |
|-----------------------------------|------------|------------|
| Loader Hydraulic Pressure         | 23 000 kPa | 3,335 psi  |
| Loader Hydraulic Flow             | 86 L/min   | 23 gal/min |
| Hydraulic Power (calculated)      | 33 kW      | 44 hp      |
| Hydraulic Flow – High Flow XPS    |            |            |
| Maximum Loader Hydraulic Pressure | 28 000 kPa | 4,061 psi  |
| Maximum Loader Hydraulic Flow     | 121 L/min  | 32 gal/min |
| Hydraulic Power (calculated)      | 57 kW      | 76 hp      |

## Cab

|               |                        |
|---------------|------------------------|
| ROPS          | ISO 3471:2008          |
| FOPS          | ISO 3449:2005 Level I  |
| FOPS Level II | ISO 3449:2005 Level II |


## Service Refill Capacities

| Chain Box, each side |        |          |
|----------------------|--------|----------|
| 236D/242D            | 8.8 L  | 2.3 gal  |
| 246D/262D            | 12.7 L | 3.3 gal  |
| Cooling System       | 14 L   | 3.7 gal  |
| Engine Crankcase     | 11 L   | 3.0 gal  |
| Fuel Tank            |        |          |
| 236D/242D            | 105 L  | 27.7 gal |
| 246D/262D            | 94 L   | 24.8 gal |
| Hydraulic System     |        |          |
| 236D/242D            | 50 L   | 13.2 gal |
| 246D/262D            | 52 L   | 13.7 gal |
| Hydraulic Tank       | 39 L   | 10.3 gal |

# 236D/246D Skid Steer Loaders Specifications

## Dimensions\*

All dimensions are approximate.

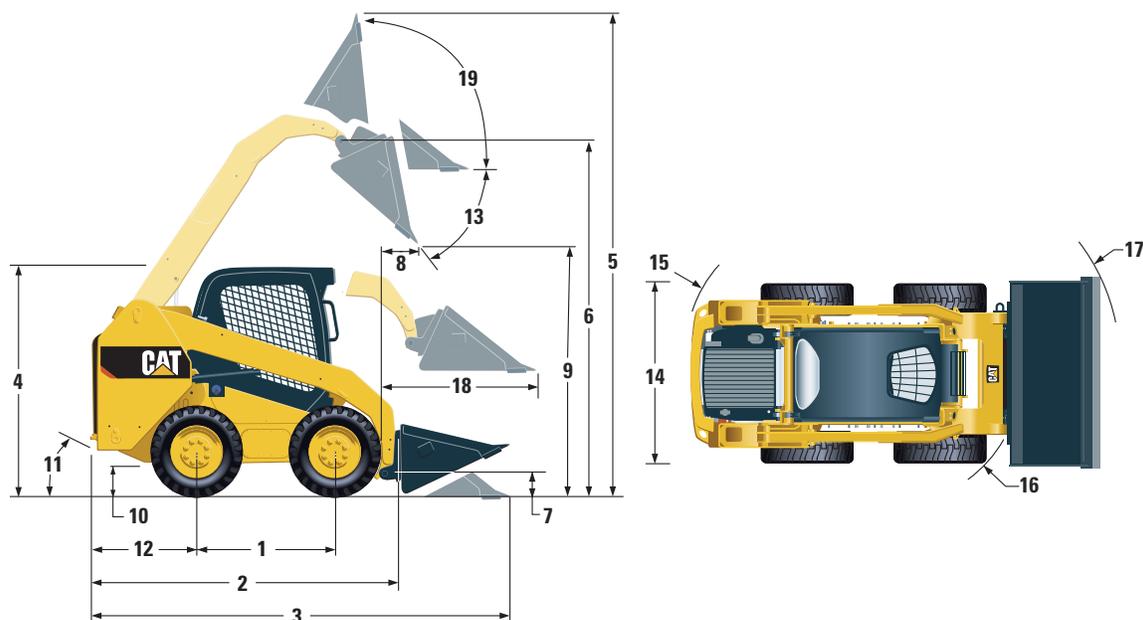


|   | 236D    |          | 246D    |          |
|---|---------|----------|---------|----------|
| 1 Wheelbase                                   | 1105 mm | 43.5 in  | 1249 mm | 49.2 in  |
| 2 Length without Bucket                       | 2767 mm | 108.9 in | 2993 mm | 117.8 in |
| 3 Length with Bucket on Ground                | 3487 mm | 137.3 in | 3708 mm | 146.0 in |
| 4 Height to Top of Cab                        | 2082 mm | 82.0 in  | 2110 mm | 83.1 in  |
| 5 Maximum Overall Height                      | 3977 mm | 156.6 in | 4032 mm | 158.7 in |
| 6 Bucket Pin Height at Maximum Lift           | 3122 mm | 122.9 in | 3154 mm | 124.2 in |
| 7 Bucket Pin Height at Carry Position         | 190 mm  | 7.5 in   | 200 mm  | 7.9 in   |
| 8 Reach at Maximum Lift and Dump              | 408 mm  | 16.0 in  | 600 mm  | 23.6 in  |
| 9 Clearance at Maximum Lift and Dump          | 2359 mm | 92.9 in  | 2465 mm | 97.1 in  |
| 10 Ground Clearance                           | 195 mm  | 7.7 in   | 226 mm  | 8.9 in   |
| 11 Departure Angle                            |         | 26°      |         | 26°      |
| 12 Bumper Overhang behind Rear Axle           | 1021 mm | 40.2 in  | 1083 mm | 42.6 in  |
| 13 Maximum Dump Angle                         |         | 48°      |         | 39°      |
| 14 Vehicle Width over Tires                   | 1676 mm | 66.0 in  | 1676 mm | 66 in    |
| 15 Turning Radius from Center – Machine Rear  | 1639 mm | 64.5 in  | 1806 mm | 71.2 in  |
| 16 Turning Radius from Center – Coupler       | 1314 mm | 51.8 in  | 1401 mm | 55.2 in  |
| 17 Turning Radius from Center – Bucket        | 2107 mm | 83.0 in  | 2181 mm | 85.9 in  |
| 18 Maximum Reach with Arms Parallel to Ground | 1353 mm | 53.3 in  | 1388 mm | 54.6 in  |
| 19 Rack Back Angle at Maximum Height          |         | 91°      |         | 96°      |

\*Operating Weight, Operating Specifications and Dimensions for the 236D and 246D all based on 75 kg (165 lb) operator, all fluids, one speed, OROPS, 1676 mm (66 in) dirt bucket, Cat 10 × 16.5 tires (on the 236D)/Cat 12 × 16.5 tires (on the 246D), standard flow hydraulics, mechanical suspension seat, no optional counterweights and manual quick coupler (unless otherwise noted).

# 242D/262D Skid Steer Loaders Specifications

## Dimensions\*

All dimensions are approximate.

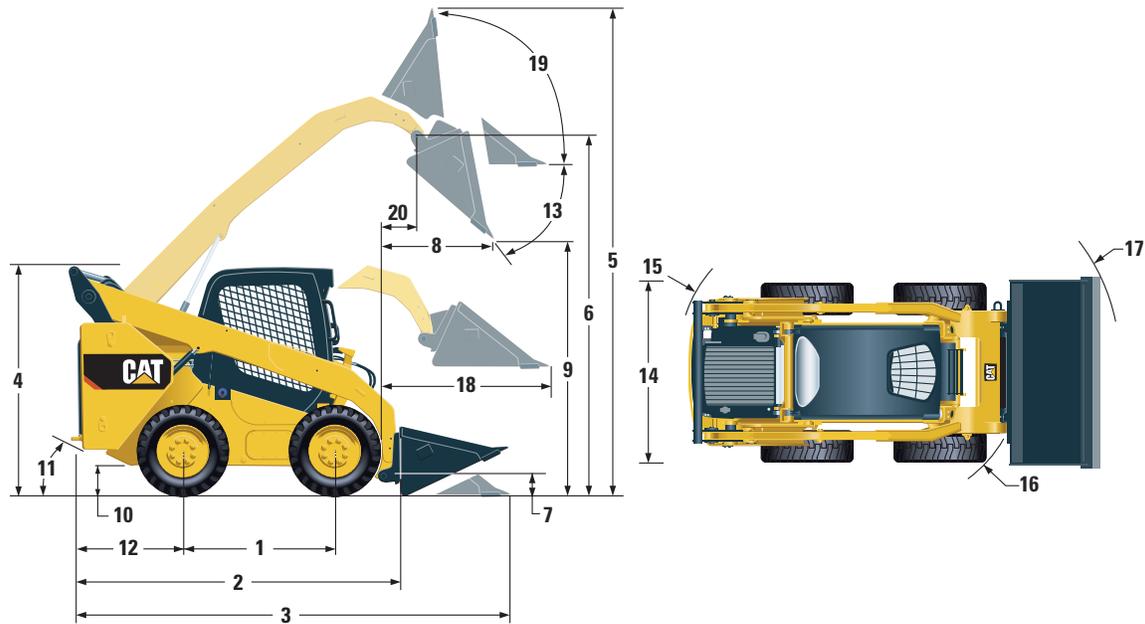

|   | 242D    |          | 262D    |          |
|---|---------|----------|---------|----------|
| 1 Wheelbase                                   | 1105 mm | 43.5 in  | 1249 mm | 49.2 in  |
| 2 Length without Bucket                       | 2767 mm | 108.9 in | 2995 mm | 117.9 in |
| 3 Length with Bucket on Ground                | 3487 mm | 137.3 in | 3714 mm | 146.2 in |
| 4 Height to Top of Cab                        | 2111 mm | 83.1 in  | 2110 mm | 83.1 in  |
| 5 Maximum Overall Height                      | 3917 mm | 154.2 in | 4008 mm | 157.8 in |
| 6 Bucket Pin Height at Maximum Lift           | 3076 mm | 121.1 in | 3172 mm | 124.9 in |
| 7 Bucket Pin Height at Carry Position         | 200 mm  | 7.9 in   | 200 mm  | 7.9 in   |
| 8 Reach at Maximum Lift and Dump              | 552 mm  | 21.7 in  | 786 mm  | 30.9 in  |
| 9 Clearance at Maximum Lift and Dump          | 2285 mm | 90.0 in  | 2380 mm | 93.7 in  |
| 10 Ground Clearance                           | 222 mm  | 8.7 in   | 226 mm  | 8.9 in   |
| 11 Departure Angle                            |         | 27°      |         | 26°      |
| 12 Bumper Overhang behind Rear Axle           | 1021 mm | 40.2 in  | 1083 mm | 42.6 in  |
| 13 Maximum Dump Angle                         |         | 52°      |         | 51°      |
| 14 Vehicle Width over Tires                   | 1676 mm | 66.0 in  | 1676 mm | 66 in    |
| 15 Turning Radius from Center – Machine Rear  | 1639 mm | 64.5 in  | 1805 mm | 71.1 in  |
| 16 Turning Radius from Center – Coupler       | 1314 mm | 51.8 in  | 1401 mm | 55.2 in  |
| 17 Turning Radius from Center – Bucket        | 2107 mm | 83.0 in  | 2181 mm | 85.9 in  |
| 18 Maximum Reach with Arms Parallel to Ground | 1249 mm | 49.2 in  | 1293 mm | 50.9 in  |
| 19 Rack Back Angle at Maximum Height          |         | 87°      |         | 84°      |
| 20 Bucket Pin Reach at Maximum Lift           | 182 mm  | 7.2 in   | 393 mm  | 15.5 in  |

\*Operating Weight, Operating Specifications and Dimensions for the 242D and 262D all based on 75 kg (165 lb) operator, all fluids, one speed, OROPS, 1676 mm (66 in) dirt bucket, Cat 12 × 16.5 tires, standard flow hydraulics, mechanical suspension seat, no optional counterweights and manual quick coupler (unless otherwise noted).

# 236D/242D/246D/262D Standard Equipment

## Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

### ELECTRICAL

- 12 volt Electrical System
- 80 ampere Alternator
- Ignition Key Start/Stop Switch
- Lights: Gauge Backlighting, Two Rear Tail Lights, Two Rear Halogen Working Lights, Two Adjustable Front Halogen Lights, Dome Light
- Backup Alarm
- Heavy Duty Battery, 880 CCA

### OPERATOR ENVIRONMENT

- Gauges: Fuel Level, Hour Meter
- Operator Warning System Indicators: Air Filter Restriction, Alternator Output, Armrest Raised/Operator Out of Seat, Engine Coolant Temperature, Engine Oil Pressure, Glow Plug Activation, Hydraulic Filter Restriction, Hydraulic Oil Temperature, Park Brake Engaged, Engine Emission System
- Adjustable Vinyl Seat
- Fold In Ergonomic Contoured Armrest
- Control Interlock System, when operator leaves seat or armrest raised: Hydraulic System Disables, Hydrostatic Transmission Disables, Parking Brake Engages
- ROPS Cab, Open, Tilt Up
- FOPS, Level I

- Top and Rear Windows
- Floor Mat
- Interior Rearview Mirror
- 12 volt Electric Socket
- Horn
- Hand (Dial) Throttle, Electronic
- Adjustable Joystick Controls
- Anti-theft Security System with six-button Keypad
- Storage Compartment with Netting

### POWER TRAIN

- Cat C3.3B, Turbo Diesel Engine
- Air Cleaner, Dual Element, Radial Seal
- S·O·S<sup>SM</sup> Sampling Valve, Hydraulic Oil
- Filters, Cartridge-type, Hydraulic
- Filters, Cartridge-type, Fuel and Water Separator
- Radiator/Hydraulic Oil Cooler (side-by-side)
- Spring Applied, Hydraulically Released Parking Brakes
- Hydrostatic Transmission
- Four Wheel Chain Drive

### OTHER

- Engine Enclosure, Lockable
- Extended Life Antifreeze, -36° C (-33° F)
- Machine Tie Down Points (6)
- Support, Lift Arm
- Hydraulic Oil Level Sight Gauge
- Radiator Coolant Level Sight Gauge
- Radiator, Expansion Bottle
- Cat ToughGuard™ Hose
- Auxiliary, Hydraulics, Continuous Flow
- Heavy Duty, Flat Faced Quick Disconnects with Integrated Pressure Release
- Split D-Ring to Route Work Tool Hoses Along Side of Left Lift Arm
- Electrical Outlet, Beacon
- Belly Pan Cleanout
- Variable Speed Demand Fan (standard on 246D/262D; optional on 236D/242D)

# 236D/242D/246D/262D Mandatory Equipment

## Mandatory Equipment

Mandatory equipment may vary. Consult your Cat dealer for details.

- Hydraulics, Standard Flow or High Flow (236D/242D)/High Flow XPS (246D/262D)
- Quick Coupler, Manual or Electric
- Seat Belt, 50 mm (2 in) or 75 mm (3 in)
- Power Train: One Speed, One Speed with Ride Control, Two Speed or Two Speed with Ride Control

### COMFORT PACKAGES

- Open ROPS (C0): Static Seat (No Foot Throttle, Headliner, Heater or Door)
- Open ROPS (C1): Foot Throttle, Headliner, Cup Holder, and choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) (No Heater or Door)
- Enclosed ROPS with Heater (C2): Foot Throttle, Headliner, Heater and Defroster, Side Windows, Cup Holder, Radio Ready, choice of Seat (Mechanical Suspension or High Back, Heated, Air Ride Seat) and Door (Glass or Polycarbonate)
- Enclosed ROPS with A/C (C3): C2 + Air Conditioner

### PERFORMANCE PACKAGES FOR THE 236D

- Performance Package H1: Standard Flow Hydraulics (No Self Level)
- Performance Package H4: Standard Flow Hydraulics (No Self Level), Return to Dig/Work Tool Positioner, Electronic Snubbing (Raise and Lower)
- Performance Package H5: High Flow Hydraulics (No Self Level), Return to Dig/Work Tool Positioner, Electronic Snubbing (Raise and Lower)

### PERFORMANCE PACKAGES FOR THE 242D

- Performance Package H1: Standard Flow Hydraulics (No Self Level)
- Performance Package H2: Standard Flow Hydraulics, Single Direction Electronic Self Level (Raise), Electronic Snubbing (Raise and Lower)
- Performance Package H3: High Flow Hydraulics, Single Direction Electronic Self Level (Raise), Electronic Snubbing (Raise and Lower)

### PERFORMANCE PACKAGES FOR THE 246D

- Performance Package H1: Standard Flow Hydraulics (No Self Level)
- Performance Package H3: High Flow XPS, Dual Direction Electronic Self Level (Raise and Lower), Electronic Snubbing (Raise and Lower)
- Performance Package H4: Standard Flow Hydraulics (No Self Level), Return to Dig/Work Tool Positioner, Electronic Snubbing (Raise and Lower)

### PERFORMANCE PACKAGES FOR THE 262D

- Performance Package H1: Standard Flow Hydraulics (No Self Level)
- Performance Package H2: Standard Flow, Dual Direction Electronic Self Level (Raise and Lower), Electronic Snubbing (Raise and Lower)
- Performance Package H3: High Flow XPS, Dual Direction Electronic Self Level (Raise and Lower), Electronic Snubbing (Raise and Lower)

# 236D/242D/246D/262D Optional Equipment

## Optional Equipment

Optional equipment may vary. Consult your Cat dealer for details.

- External Counterweights
- Variable Speed Demand Fan (236D/242D)
- Beacon, Rotating
- Engine Block Heater – 120V
- Oil, Hydraulic, Cold Operation
- Paint, Custom
- Heavy Duty Battery, 1,000 CCA (246D/262D only)
- Product Link, Cellular
- Advanced Display: Full Color, 127 mm (5 in) LCD screen, Advanced Multi-operator Security System, On-screen Adjustments for Implement Response, Hystat Response, and Creep Control; Rearview Camera Ready
- Advanced Display: Rearview Camera Included
- Work Tool Return to Dig and Work Tool Positioner
- Bluetooth Radio with Microphone (AM/FM/Weather Band Receiver with USB and Auxiliary Input Jack)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEHQ7254 (04-2014)

© 2014 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

