

1100 Series 1104D-44TG1 Diesel Engine – ElectropaK

63 kWm (84 hp) gross standby power @ 1800 rpm

The Perkins® 1104D turbocharged ElectropaKs are the latest addition to the 1100 Series ElectropaK range. Perkins has developed this engine in line with our customer's needs by providing the options of either electronic common rail or mechanically controlled fuel systems.

These ultra clean engines are assembled on a new high technology production line. Frequent computerized checks during the production process ensure high build quality is maintained throughout.

Perkins has produced a world-class product for their customers, engineered to give even greater levels of reliability, yet with a lower cost of ownership.



Emissions

Certified against the requirements of U.S. EPA Tier 3 legislation for non-road mobile machinery, powered by constant speed engines (EPA 40 CFR Part 89 Tier 3).

Specification		
Number of cylinders	4 vertical in-line	
Bore and stroke	105 x 127 mm	4.1 x 5.0 in
Displacement	4.41 litres	269 in ³
Aspiration	Turbocharged	
Cycle	4 stroke	
Combustion system	Direct injection	
Compression ratio	18.2:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	8.4 litres	2.2 US gal
Cooling system	Water-cooled	
Total coolant capacity	16.5 litres	4.4 US gal

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN1908/05/15 Produced in England ©2015 Perkins Engines Company Limited

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-44TG1 Diesel Engine – ElectropaK

63 kWm (84 hp) gross standby power @ 1800 rpm

Features and benefits

Powered by your needs

- Hitting the key power nodes required by the market, the 1104D-44TG1 ElectropaK has been developed to provide a clean and cost effective power solution

State of the art design

- The 1104D utilises the latest diesel mechanical controlled fuel system technology. This allows the 1104D-44TG1 to deliver high power density and excellent fuel economy with low exhaust emissions and minimum heat rejection

Worldwide power solution

- The 1104D has been designed to be worldwide fuel tolerant, and 5% biofuel (RME) options are available to meet local market needs

Lower operating costs

- The 1104D maintains Tier 2 fuel economy. This will allow many customers to keep existing fuel tanks, avoiding the need for costly redesign. Service intervals are set at 500 hours as standard
- **Warranties and Service Contracts**
We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally
Discover more: www.perkins.esc
- Low usage warranty package is also available

Long-term power solution

- The 1104D-44TG1 ElectropaK has been designed to fully comply with stringent EPA Tier 3 emissions regulations, providing an emissions compliant power solution for the future

Product support

- Perkins actively pursues product support excellence by ensuring our distribution network invest in their territory – strengthening relationships and providing more value to you, our customer
- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their fingertips covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts and service. We give 100% reassurance that you receive the very best in terms of quality for lowest possible cost .. wherever your Perkins powered machine is operating in the world
- To find your local distributor: www.perkins.com/distributor

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN1908/04/15 Produced in England ©2015 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-44TG1 Diesel Engine – Electropak

63 kWm (84 hp) gross standby power @ 1800 rpm

Technical information

Air inlet

- Mounted air filter and turbocharger

Fuel system

- Rotary type pump
- Fuel filter

Lubrication system

- Wet cast iron sump with filler and dipstick
- Oil filter

Cooling system

- Belt-driven pusher fan and guards
- Mounted radiator and piping
- Water pump

Electrical equipment

- 12 volt starter motor and 12 volt 65 amp alternator with DC output

Flywheel and housing

- High inertia flywheel to SAE J620 size 10/11
- SAE 3 flywheel housing

Starting aids

- Glow plugs

Literature

- User's Handbook

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.


Publication No. PN1908/04/15 Produced in England ©2015 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-44TG1 Diesel Engine – Electropak

63 kWm (84 hp) gross standby power @ 1800 rpm

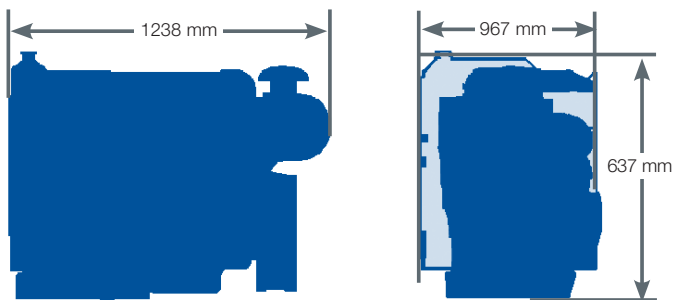

Engine package weights and dimensions		
Length	1238 mm	48.7 in
Width	967 mm	38.0 in
Height	637 mm	25.0 in
Weight (dry)	474 kg	1045 lb

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN1908/04/15 Produced in England ©2015 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

1100 Series 1104D-44TG1 Diesel Engine – Electropak

63 kWm (84 hp) gross standby power @ 1800 rpm

Speed rpm	Type of operation	Typical generator output (Net)		Engine power			
				Gross		Net	
		kVA	kWe	kWm	hp	kWm	hp
1800	Standby power	70.9	56.7	64	86	63	85

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1. Derating may be required for conditions outside these; consult Perkins Engines Company Limited.

Generator powers are typical and are based on typical alternator efficiencies and a power factor of 0.8. Fuel specification: BS 2869 Class 2 or ASTM D975 D2. Lubricating oil: API CH4/ACEA E5.

Rating definitions

Prime power: Power available at variable load in lieu of a main power network. Overload of 10% permitted for 1 hour in every 12 hours operation.

Standby power: Power: available at variable load in the event of a main power network failure. Maximum use 500 hours per year. No overload is permitted.

Percent of prime power	Fuel consumption at 1800 rpm g/kWh	Fuel consumption at 1800 rpm l/hr
Standby power	243	18.7
Prime power	240	16.6
75%	248	12.8
50%	260	9
25%	300	5.2

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN1908/04/15 Produced in England ©2015 Perkins Engines Company Limited



THE HEART OF EVERY GREAT MACHINE