



# Cat<sup>®</sup> TL943D

## TELEHANDLER

### Specifications

#### Engine

Model*	Cat <sup>®</sup> C3.4B	
Gross Power (Basic)	83 kW	111 hp

\*Meets U.S. EPA Tier 4 Final emission standards.

#### Weights

Operating Weight	11 680 kg	25,750 lb
------------------	-----------	-----------

#### Operating Specifications

Rated Load Capacity	4082 kg	9,000 lb
Maximum Lift Height	13.1 m	43 ft
Maximum Forward Reach	9.4 m	31 ft
Frame Leveling	10°	
Top Travel Speed	29.9 km/h	19 mph
Capacity at Maximum Height	3175 kg	7,000 lb
Capacity at Maximum Reach	544 kg	1,200 lb
Turning Radius over Tires	3.7 m	12 ft
Drawbar Pull (Loaded)	96 kN	21,582 lbf

#### Hydraulic System

Variable displacement load sensing axial piston pump		
System Operating Pressure	260 bar	3,770 psi
Auxiliary Hydraulic Pressure	240 bar	3,481 psi
Auxiliary Hydraulic Flow	94 L/min	25 gal/min

- Auxiliary Hydraulic Circuit used for all attachments equipped with cylinders or other hydraulic components.

#### Service Refill Capacities

Fuel Tank	145 L	38 gal
Diesel Exhaust Fluid (DEF) Tank	21.5 L	5.7 gal
Hydraulic System	177 L	47 gal

#### Tires

Standard	370/75-28 Duraforce MT
Optional	13.00 × 24 Foam Duraforce 14 × 24-16 PR Air 14 × 24-12 PR Foam

#### Transmission Speeds

Forward	4 speed
Reverse	3 speed

#### Boom Performance

Boom Up	9.9 Seconds
Boom Down	8.5 Seconds
Tele In	14.6 Seconds
Tele Out	14.5 Seconds

#### Axles

- Trunnion mounted planetary 55 degree steer axles.
- High bias limited slip differential on front axle.

#### Brakes

- Service Brakes are inboard wet disc brakes on front and rear axles.
- Parking Brakes are wet disc, spring applied hydraulic release on front axle.


#### Work Tools

	Includes	Includes
Hydraulic IT Coupler	Auxiliary Electrics	Auxiliary Electrics
Pallet Forks	(2) 1525 mm, 60 mm × 150 mm (2) 1220 mm, 60 mm × 100 mm (2) 1220 mm, 60 mm × 125 mm	(2) 60 in, 2.36 in × 6 in (2) 48 in, 2.36 in × 4 in (2) 48 in, 2.36 in × 5 in
Lumber Forks	(2) 1525 mm, 45 mm × 180 mm (2) 1829 mm, 50 mm × 150 mm	(2) 60 in, 1.75 in × 7 in (2) 72 in, 2 in × 6 in
Cubing Forks	(2) 1220 mm, 50 mm × 50 mm	(2) 48 in, 2 in × 2 in
Carriages:		
Standard Tilt	1270 mm	50 in
Wide Tilt	1829 mm	72 in
Side Shift	1220 mm	48 in
Standard Rotate	1270 mm	50 in
Wide Rotate	1829 mm	72 in
Swing	100°, 1829 mm, 4028 kg Capacity, 2268 kg Swung	100°, 72 in, 9,000 lb Capacity, 5,000 lb Swung
Dual Fork Positioning	1270 mm	50 in




# TL943D Telehandler

## Dimensions (All dimensions are approximate.)

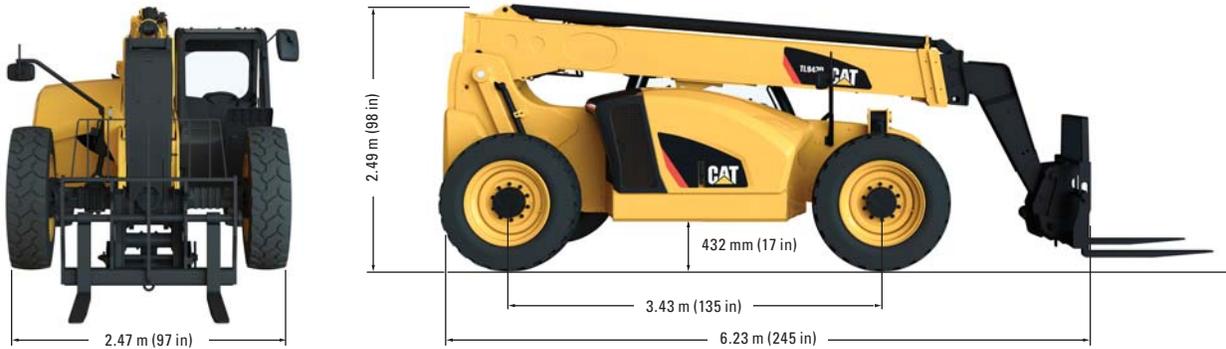

## Load Chart and Dimensions

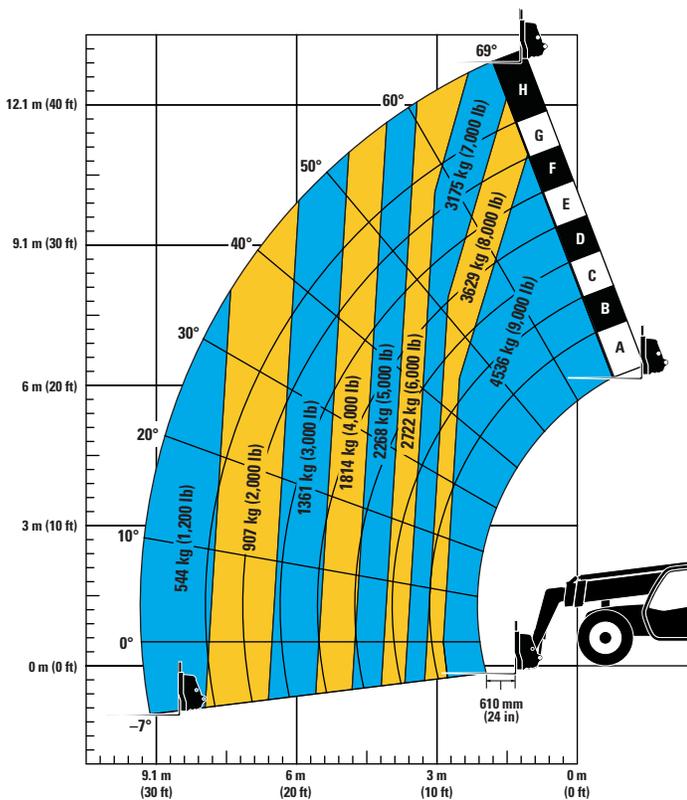

### IMPORTANT

Rated lift capacities shown are with machine equipped with carriage and pallet forks. The machine must be level on a firm surface with undamaged, properly inflated tires. Machine specifications and stability are based on rated lift capacities at specific boom angles and boom lengths. (If specifications are critical, the proposed application should be discussed with your dealer.)

DO NOT exceed rated lift capacity loads, as unstable and dangerous machine conditions will result.

DO NOT tip the machine forward to determine the allowable load.

Use only approved attachments with proper material handler model/attachment load capacity charts displayed in the operator's cab. OSHA requires all rough terrain forklift operators be trained according to OSHA 29 CFR 1910.178 (1).

*Due to continuous product improvements, machine specifications and/or equipment changes may be made without prior notification. This machine meets or exceeds ANSI/ITSDF B56.6-2011 as originally manufactured for intended applications.*

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

© 2015 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEHQ7515-01 (09-2015)  
Replaces AEHQ7515

