

323F L

Hydraulic Excavator






Lift Capacity Specifications

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket

Region: ADSD-N

Long Undercarriage

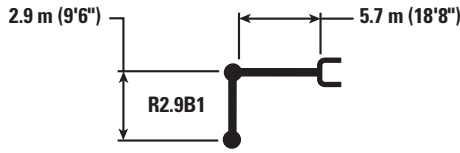

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4550	*4550			*3900 *8,700	*3900 *8,700	6150 240
6000 mm 240 in	kg lb							*4950 *10,900	*4950 *10,900			*3650 *8,000	*3650 *8,000	7290 290
4500 mm 180 in	kg lb							*5450 *11,850	*5450 *11,850	*5150 *11,250	3950 8,450	*3550 *7,850	*3550 *7,850	7990 320
3000 mm 120 in	kg lb					*8000 *17,150	*8000 *17,150	*6250 *13,600	5300 11,450	*5450 *11,900	3850 8,250	*3650 *8,000	3250 7,200	8360 330
1500 mm 60 in	kg lb					*9650 *20,850	7600 16,350	*7100 *15,400	5100 10,950	5750 12,400	3750 8,050	*3850 *8,500	3150 6,950	8450 340
0 mm 0 in	kg lb			*6200 *14,300	*6200 *14,300	*10 600 *22,900	7300 15,750	*7700 *16,700	4950 10,600	5650 12,200	3650 7,850	*4250 *9,400	3200 7,050	8260 330
-1500 mm -60 in	kg lb	*6650 *14,850	*6650 *14,850	*10 750 *24,400	*10 750 *24,400	*10 700 *23,150	7250 15,550	7750 16,700	4850 10,450	5650 12,150	3650 7,800	*5000 *11,050	3450 7,600	7780 310
-3000 mm -120 in	kg lb	*11 400 *25,600	*11 400 *25,600	*14 150 *30,700	14 050 30,050	*10 000 *21,600	7300 15,700	*7450 *15,950	4900 10,500			*6100 *13,400	4050 8,950	6950 280
-4500 mm -180 in	kg lb			*11 300 *24,200	*11 300 *24,200	*8150 *17,300	7500 16,150					*6150 *13,500	5550 12,500	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.









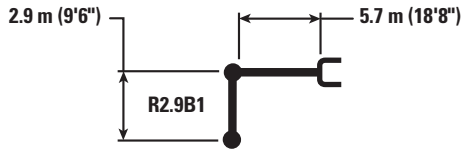




323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket – Heavy Lift On

Region: ADSD-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4950	*4950			*4300	*4300	6150 240
6000 mm 240 in	kg lb							*5450	*5450			*3950	*3950	7290 290
4500 mm 180 in	kg lb							*6000	5550	*5650	3950	*3900	3550	7990 320
3000 mm 120 in	kg lb					*8800	8050	*6900	5300	5900	3850	*4000	3250	8360 330
1500 mm 60 in	kg lb					*10 650	7600	*7850	5100	5750	3750	*4200	3150	8450 340
0 mm 0 in	kg lb			*6600	*6600	*11 650	7300	7850	4950	5650	3650	*4650	3200	8260 330
-1500 mm -60 in	kg lb	*7050	*7050	*11 400	*11 400	*11 800	7250	7750	4850	5650	3650	5350	3450	7780 310
-3000 mm -120 in	kg lb	*12 100	*12 100	*15 600	14 050	*11 050	7300	7800	4900			6350	4050	6950 280
-4500 mm -180 in	kg lb			*12 500	*12 500	*9000	7500					*6800	5550	5600 220
				*26,750	*26,750	*19,100	16,150					*14,950	12,500	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










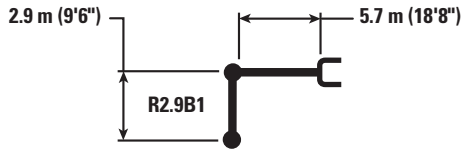




323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket

Region: ADSD-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4550	*4550			*3900	*3900	6150
6000 mm 240 in	kg lb							*4950	*4950			*3650	*3650	7290
4500 mm 180 in	kg lb							*10,900	*10,900			*8,000	*8,000	290
4500 mm 180 in	kg lb							*5450	*5450	*5150	4050	*3550	*3550	7990
3000 mm 120 in	kg lb					*8000	*8000	*11,850	*11,850	*11,250	8,650	*7,850	*7,850	320
3000 mm 120 in	kg lb					*17,150	*17,150	*6250	5450	*5450	3950	*3650	3350	8360
1500 mm 60 in	kg lb					*13,600	*13,600	*8000	7800	*11,900	8,500	*8,000	7,400	330
1500 mm 60 in	kg lb					*9650	7800	*15,400	*11,250	*5900	3850	*3850	3250	8450
1500 mm 60 in	kg lb					*20,850	16,750	*15,400	11,250	12,750	8,250	*8,500	7,150	340
0 mm 0 in	kg lb					*6200	*6200	*7700	5050	5850	3750	*4250	3300	8260
0 mm 0 in	kg lb			*14,300	*14,300	*22,900	16,200	*16,700	10,900	12,550	8,100	*9,400	7,250	330
-1500 mm -60 in	kg lb	*6650	*6650	*10,750	*10,750	*10,700	7450	*7900	5000	5800	3750	*5000	3550	7780
-1500 mm -60 in	kg lb	*14,850	*14,850	*24,400	*24,400	*23,150	16,000	*17,100	10,750	12,500	8,050	*11,050	7,850	310
-3000 mm -120 in	kg lb	*11,400	*11,400	*14,150	*14,150	*10,000	7500	*7450	5000			*6100	4150	6950
-3000 mm -120 in	kg lb	*25,600	*25,600	*30,700	*30,700	*21,600	16,100	*15,950	10,800			*13,400	9,200	280
-4500 mm -180 in	kg lb			*11,300	*11,300	*8150	7700					*6150	5700	5600
-4500 mm -180 in	kg lb			*24,200	*24,200	*17,300	16,550					*13,500	12,800	220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










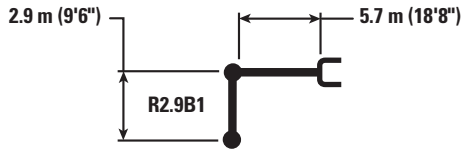




323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket – Heavy Lift On

Region: ADSD-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4950	*4950			*4300	*4300	6150 240
6000 mm 240 in	kg lb							*5450	*5450			*3950	*3950	7290 290
4500 mm 180 in	kg lb							*6000	5700	*5650	4050	*3900	3650	7990 320
3000 mm 120 in	kg lb					*8800	8250	*6900	5450	*6050	3950	*4000	3350	8360 330
1500 mm 60 in	kg lb					*10 650	7800	*7850	5250	5950	3850	*4200	3250	8450 340
0 mm 0 in	kg lb			*6600	*6600	*11 650	7500	8050	5050	5850	3750	*4650	3300	8260 330
-1500 mm -60 in	kg lb	*7050	*7050	*11 400	*11 400	*11 800	7450	8000	5000	5800	3750	*5500	3550	7780 310
-3000 mm -120 in	kg lb	*12 100	*12 100	*15 600	14 400	*11 050	7500	8000	5000			6500	4150	6950 280
-4500 mm -180 in	kg lb			*12 500	*12 500	*9000	7700					*6800	5700	5600 220
				*26,750	*26,750	*19,100	16,550					*14,950	12,800	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










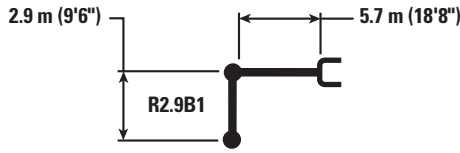




323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket

Region: ADSD-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4550	*4550			*3900	*3900	6150
6000 mm 240 in	kg lb							*4900	*4900			*3650	*3650	7290
4500 mm 180 in	kg lb							*10,750	*10,750			*8,000	*8,000	290
3000 mm 120 in	kg lb							*5400	*5400	*5050	3950	*3550	3550	7990
1500 mm 60 in	kg lb							*11,700	*11,700	*11,100	8,400	*7,850	*7,850	320
0 mm 0 in	kg lb							*16,500	*16,500	*11,750	11,400	*11,750	*8,200	8,200
-1500 mm -60 in	kg lb	*6650	*6650	*10,750	*10,750	*10,550	7200	7750	4800	5650	3600	*5000	3450	7780
-3000 mm -120 in	kg lb	*11,400	*11,400	*14,000	*14,000	*9850	7250	*7300	4850			*6000	4050	6950
-4500 mm -180 in	kg lb			*11,150	*11,150	*8000	7450					*6050	5550	5600
				*23,850	*23,850	*17,050	16,100					*13,300	12,500	220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










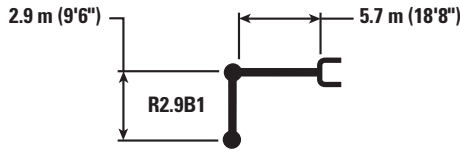




323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket – Heavy Lift On

Region: ADSD-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4950	*4950			*4300	*4300	6150 240
6000 mm 240 in	kg lb							*5400 *11,850	*5400 *11,850			*3950 *8,750	*3950 *8,750	7290 290
4500 mm 180 in	kg lb							*5950 *12,900	5550 11,900	*5600 *12,250	3950 8,400	*3900 *8,550	3550 7,850	7990 320
3000 mm 120 in	kg lb					*8650 *18,650	8050 17,350	*6800 *14,800	5300 11,400	5900 12,650	3850 8,200	*4000 *8,750	3250 7,150	8360 330
1500 mm 60 in	kg lb					*10 500 *22,650	7550 16,250	*7750 *16,750	5050 10,900	5750 12,350	3700 8,000	*4200 *9,250	3150 6,900	8450 340
0 mm 0 in	kg lb			*6600 *15,150	*6600 *15,150	*11 500 *24,900	7250 15,650	7800 16,800	4900 10,550	5650 12,150	3600 7,800	*4650 *10,250	3200 7,000	8260 330
-1500 mm -60 in	kg lb	*7050 *15,750	*7050 *15,750	*11 400 *25,850	*11 400 *25,850	*11 650 *25,200	7200 15,450	7750 16,650	4800 10,350	5650 12,100	3600 7,750	5350 11,800	3450 7,550	7780 310
-3000 mm -120 in	kg lb	*12 100 *27,100	*12 100 *27,100	*15 450 *33,450	14 000 29,950	*10 900 *23,550	7250 15,600	7800 16,750	4850 10,450			6350 14,050	4050 8,950	6950 280
-4500 mm -180 in	kg lb			*12 350 *26,400	*12 350 *26,400	*8850 *18,900	7450 16,100					*6700 *14,750	5550 12,500	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Region: ADS-D-N

Long Undercarriage

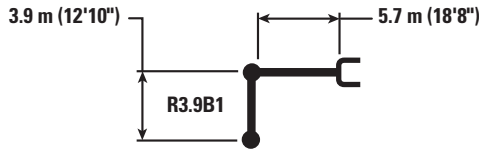

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in		mm in		
7500 mm 300 in	kg lb													*2700 *6,000	*2700 *6,000	7320 290
6000 mm 240 in	kg lb									*4200 *8,750	*4200 *8,750			*2550 *5,600	*2550 *5,600	8300 330
4500 mm 180 in	kg lb									*4800 *10,500	4750 10,150			*2500 *5,500	*2500 *5,500	8920 350
3000 mm 120 in	kg lb					*7150 *15,450	*7150 *15,450	*5900 *12,850	*5900 *12,850	*5300 *11,500	4600 9,850	*3500 *6,500	3500 *6,500	*2550 *5,550	*2550 *5,550	9250 370
1500 mm 60 in	kg lb			*9250 *22,000	*9250 *22,000	*9300 *20,000	9150 19,700	*7000 *15,150	6100 13,100	*5850 *12,750	4450 9,550	*4050 *7,750	3400 7,300	*2650 *5,850	*2650 *5,850	9330 370
0 mm 0 in	kg lb			*7600 *17,400	*7600 *17,400	*10 800 *23,400	8700 18,750	*7900 *17,100	5850 12,600	*6350 *13,800	4300 9,250	*3800 *6,600	3350 *6,600	*2900 *6,400	*2900 *6,400	9160 360
-1500 mm -60 in	kg lb	*5700 *12,700	*5700 *12,700	*9800 *22,250	*9800 *22,250	*11 500 *24,850	8500 18,300	*8400 *18,200	5700 12,300	6500 14,050	4250 9,100			*3300 *7,300	*3300 *7,300	8730 350
-3000 mm -120 in	kg lb	*8900 *19,900	*8900 *19,900	*13 600 *30,900	*13 600 *30,900	*11 350 *24,500	8500 18,250	*8350 *18,050	5650 12,200	*6450 *13,850	4200 9,100			*4050 *8,950	3900 8,600	8000 320
-4500 mm -180 in	kg lb	*12 900 *29,050	*12 900 *29,050	*14 700 *31,650	*14 700 *31,650	*10 200 *21,950	8600 18,500	*7500 *15,950	5750 12,400					*5650 *12,650	4850 10,800	6870 270
-6000 mm	kg					*7250	*7250							*6400	*6400	4910



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.








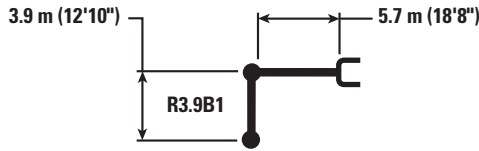






323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Region: ADS-D-N

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		9000 mm/360 in				mm in
																
7500 mm 300 in	kg lb													*3000 *6,600	*3000 *6,600	7320 290
6000 mm 240 in	kg lb									*4600 *9,600	*4600 *9,600			*2800 *6,150	*2800 *6,150	8300 330
4500 mm 180 in	kg lb									*5300 *11,650	4750 10,150			*2750 *6,050	*2750 *6,050	8920 350
3000 mm 120 in	kg lb					*7900 *17,000	*7900 *17,000	*6550 *14,200	6400 13,700	*5850 *12,750	4600 9,850	*3850 *7,150	3500 *7,150	*2800 *6,150	*2800 *6,150	9250 370
1500 mm 60 in	kg lb			*9800 *23,300	*9800 *23,300	*10 250 *22,050	9150 19,700	*7750 *16,750	6100 13,100	*6500 *14,100	4450 9,550	*4450 *8,500	3400 7,300	*2950 *6,450	*2950 *6,450	9330 370
0 mm 0 in	kg lb			*8050 *18,450	*8050 *18,450	*11 950 *25,800	8700 18,750	*8700 *18,900	5850 12,600	6600 14,200	4300 9,250	*4150 *7,250	3350 7,200	*3200 *7,050	*3200 *7,050	9160 360
-1500 mm -60 in	kg lb	*6050 *13,500	*6050 *13,500	*10 400 *23,550	*10 400 *23,550	*12 700 *27,450	8500 18,300	9000 19,350	5700 12,300	6500 14,050	4250 9,100			*3650 *8,000	3450 7,650	8730 350
-3000 mm -120 in	kg lb	*9400 *21,050	*9400 *21,050	*14 400 *32,750	*14 400 *32,750	*12 500 *27,050	8500 18,250	8950 19,300	5650 12,200	6500 14,050	4200 9,100			*4450 *9,850	3900 8,600	8000 320
-4500 mm -180 in	kg lb	*13 650 *30,750	*13 650 *30,750	*16 250 *34,950	*16 250 *34,950	*11 300 *24,250	8600 18,500	*8300 *17,650	5750 12,400					*6150 *13,850	4850 10,800	6870 270
-6000 mm	kg					*8050	*8050							*7100	*7100	4910



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Region: ADSD-N

Long Undercarriage

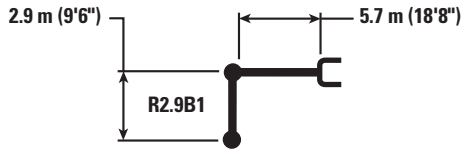

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4550	*4550			*3900 *8,700	*3900 *8,700	6150 240
6000 mm 240 in	kg lb							*5450 *11,950	*5450 *11,950			*3650 *8,000	*3650 *8,000	7290 290
4500 mm 180 in	kg lb							*6000 *13,050	*6000 *13,050	*5650 *11,400	4700 10,150	*3550 *7,850	*3550 *7,850	7990 320
3000 mm 120 in	kg lb					*8750 *18,850	*8750 *18,850	*6900 *14,950	6350 13,650	*6000 *13,100	4600 9,950	*3650 *8,000	*3650 *8,000	8360 330
1500 mm 60 in	kg lb					*10 600 *22,900	9100 19,550	*7850 *16,950	6100 13,150	*6500 *14,050	4500 9,700	*3850 *8,500	3850 8,400	8450 340
0 mm 0 in	kg lb			*6200 *14,300	*6200 *14,300	*11 650 *25,150	8800 18,950	*8500 *18,400	5950 12,800	6700 14,450	4400 9,500	*4250 *9,400	3900 8,550	8260 330
-1500 mm -60 in	kg lb	*6650 *14,850	*6650 *14,850	*10 750 *24,400	*10 750 *24,400	*11 750 *25,400	8700 18,750	*8700 *18,800	5850 12,650	6700 14,400	4400 9,450	*5000 *11,050	4200 9,250	7780 310
-3000 mm -120 in	kg lb	*11 400 *25,600	*11 400 *25,600	*15 550 *33,700	*15 550 *33,700	*11 000 *23,750	8750 18,850	*8150 *17,550	5900 12,700			*6500 *14,450	4900 10,850	6950 280
-4500 mm -180 in	kg lb			*12 450 *26,600	*12 450 *26,600	*8950 *19,050	*8950 *19,050					*6750 *14,850	6650 *14,850	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Region: ADSD-N

Long Undercarriage

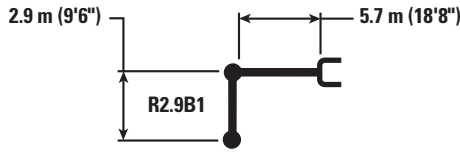

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4950	*4950			*4300 *9,500	*4300 *9,500	6150 240
6000 mm 240 in	kg lb							*6000 *13,150	*6000 *13,150			*3950 *8,750	*3950 *8,750	7290 290
4500 mm 180 in	kg lb							*6600 *14,350	6550 14,150	*6200 *12,450	4700 10,150	*3900 *8,550	*3900 *8,550	7990 320
3000 mm 120 in	kg lb					*9650 *20,750	9550 20,600	*7600 *16,450	6350 13,650	*6650 *14,450	4600 9,950	*4000 *8,750	3950 8,700	8360 330
1500 mm 60 in	kg lb					*11 700 *25,200	9100 19,550	*8600 *18,650	6100 13,150	6800 14,650	4500 9,700	*4200 *9,250	3850 8,400	8450 340
0 mm 0 in	kg lb			*6600 *15,150	*6600 *15,150	*12 800 *27,700	8800 18,950	9250 19,900	5950 12,800	6700 14,450	4400 9,500	*4650 *10,250	3900 8,550	8260 330
-1500 mm -60 in	kg lb	*7050 *15,750	*7050 *15,750	*11 400 *25,850	*11 400 *25,850	*12 950 *28,000	8700 18,750	9150 19,700	5850 12,650	6700 14,400	4400 9,450	*5500 *12,100	4200 9,250	7780 310
-3000 mm -120 in	kg lb	*12 100 *27,100	*12 100 *27,100	*17 150 *37,150	16 800 36,000	*12 100 *26,200	8750 18,850	*9000 *19,400	5900 12,700			*7100 *15,800	4900 10,850	6950 280
-4500 mm -180 in	kg lb			*13 700 *29,400	*13 700 *29,400	*9900 *21,050	8950 19,300					*7500 *16,450	6650 14,950	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Region: ADSD-N

Long Undercarriage

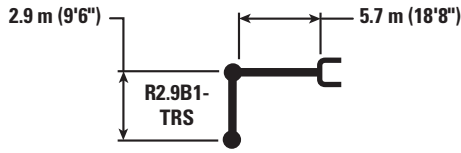

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
7500 mm 300 in	kg lb							*4450	*4450			*3850	*3850	6150
6000 mm 240 in	kg lb							*5300	*5300			*3550	*3550	7290
4500 mm 180 in	kg lb							*5800	*5800	*5450	4550	*3500	*3500	7990
3000 mm 120 in	kg lb					*8500	*8500	*6700	6150	*5850	4450	*3550	*3550	8360
1500 mm 60 in	kg lb					*10 300	8800	*7600	5900	*6250	4350	*3800	3650	8450
0 mm 0 in	kg lb			*6150	*6150	*11 300	8500	*8250	5750	6550	4250	*4200	3750	8260
-1500 mm -60 in	kg lb	*6600	*6600	*10 700	*10 700	*11 450	8450	*8450	5650	6500	4200	*4950	4050	7780
-3000 mm -120 in	kg lb	*11 350	*11 350	*15 150	*15 150	*10 700	8500	*7950	5700			*6400	4700	6950
-4500 mm -180 in	kg lb			*12 100	*12 100	*8700	*8700					*6550	6450	5600
				*25,850	*25,850	*18,450	*18,450					*14,400	*14,400	220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

HL Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Region: ADSD-N

Long Undercarriage

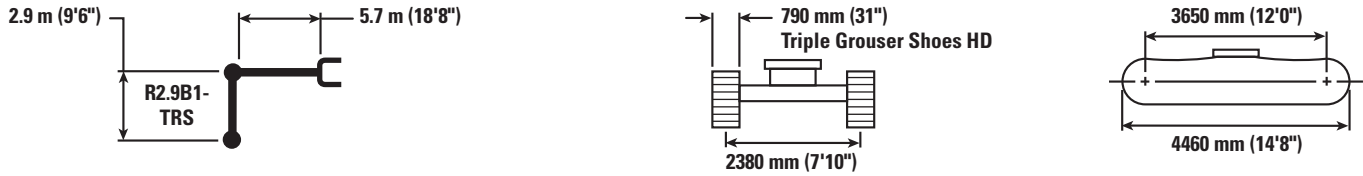

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4900	*4900			*4200 *9,350	*4200 *9,350	6150 240
6000 mm 240 in	kg lb							*5850 *12,800	*5850 *12,800			*3900 *8,600	*3900 *8,600	7290 290
4500 mm 180 in	kg lb							*6400 *13,950	*6400 13,850	*6050 *12,300	4550 9,800	*3850 *8,400	*3850 *8,400	7990 320
3000 mm 120 in	kg lb					*9400 *20,200	9350 20,200	*7400 *16,000	6150 13,300	*6450 *14,050	4450 9,600	*3900 *8,600	3800 8,350	8360 330
1500 mm 60 in	kg lb					*11 400 *24,550	8800 19,000	*8400 *18,150	5900 12,750	6650 14,300	4350 9,350	*4150 *9,100	3650 8,050	8450 340
0 mm 0 in	kg lb			*6550 *15,000	*6550 *15,000	*12 500 *27,000	8500 18,350	9050 19,450	5750 12,350	6550 14,050	4250 9,150	*4600 *10,100	3750 8,200	8260 330
-1500 mm -60 in	kg lb	*7000 *15,600	*7000 *15,600	*11 350 *25,750	*11 350 *25,750	*12 600 *27,300	8450 18,150	8950 19,250	5650 12,150	6500 14,000	4200 9,100	*5400 *11,900	4050 8,850	7780 310
-3000 mm -120 in	kg lb	*12 000 *26,950	*12 000 *26,950	*16 750 *36,250	16 350 35,050	*11 800 *25,550	8500 18,300	*8750 *18,850	5700 12,250			*7000 *15,600	4700 10,450	6950 280
-4500 mm -180 in	kg lb			*13 350 *28,650	*13 350 *28,650	*9600 *20,450	8700 18,800					*7250 *15,950	6450 14,550	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: ADSD-N

Long Undercarriage

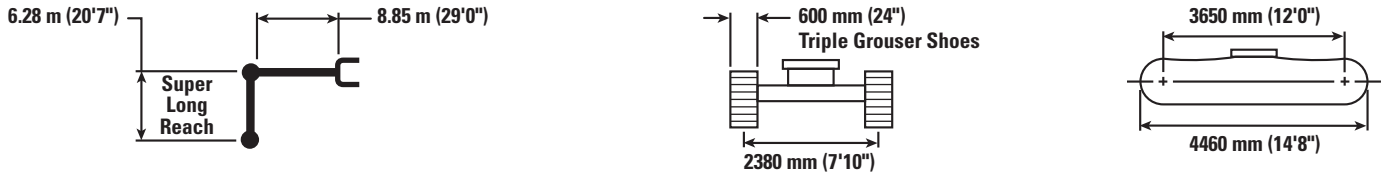

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
12 000 mm 480 in	kg lb											*1250 *2,800	*1250 *2,800	10 350 400
10 500 mm 420 in	kg lb											*1200 *2,600	*1200 *2,600	11 660 460
9000 mm 360 in	kg lb											*1150 *2,450	*1150 *2,450	12 660 500
7500 mm 300 in	kg lb											*1100 *2,400	*1100 *2,400	13 410 530
6000 mm 240 in	kg lb											*1100 *2,400	*1100 *2,400	13 970 550
4500 mm 180 in	kg lb											*1100 *2,400	*1100 *2,400	14 340 570
3000 mm 120 in	kg lb			*4700 *11,850	*4700 *11,850	*5950 *12,700	*5950 *12,700	*4350 *9,400	*4350 *9,400	*3550 *7,650	*3550 *7,650	*1150 *2,500	*1150 *2,500	14 550 580
1500 mm 60 in	kg lb					*6750 *15,750	6700 14,450	*5150 *11,050	4600 9,950	*4000 *8,700	3450 7,350	*1200 *2,600	1150 2,500	14 600 580
0 mm 0 in	kg lb			*2000 *4,550	*2000 *4,550	*4650 *10,700	*4650 *10,700	*5750 *12,400	4150 8,950	*4450 *9,550	3100 6,700	*1250 *2,750	1150 2,450	14 490 570
-1500 mm -60 in	kg lb	*2050 *4,550	*2050 *4,550	*2700 *6,050	*2700 *6,050	*4650 *10,500	*4650 *10,500	*6100 *13,250	3850 8,300	*4700 *10,200	2900 6,250	*1350 *2,950	1150 2,500	14 230 560
-3000 mm -120 in	kg lb	*2850 *6,350	*2850 *6,350	*3500 *7,850	*3500 *7,850	*5200 *11,750	*5200 *11,750	*6250 *13,550	3700 8,000	4850 10,350	2750 5,950	*1500 *3,300	1200 2,600	13 790 550
-4500 mm -180 in	kg lb	*3650 *8,150	*3650 *8,150	*4400 *9,900	*4400 *9,900	*6050 *13,700	5600 12,000	*6250 *13,450	3700 7,900	4750 10,250	2700 5,800	*1700 *3,750	1250 2,800	13 170 520
-6000 mm -240 in	kg lb	*4550 *10,100	*4550 *10,100	*5400 *12,150	*5400 *12,150	*7200 *16,350	5700 12,250	*6000 *12,900	3700 8,000	*4750 *10,250	2700 5,850	*2000 *4,450	1400 3,150	12 340 490
-7500 mm -300 in	kg lb	*5500 *12,250	*5500 *12,250	*6550 *14,800	*6550 *14,800	*7100 *15,250	5900 12,700	*5500 *11,850	3850 8,250	*4450 *9,500	2800 6,050	*2500 *5,650	1650 3,700	11 240 440
-9000 mm -360 in	kg lb			*7950 *16,950	*7950 *16,950	*5950 *12,700	*5950 *12,700	*4700 *10,050	4050 8,700	*3800 *8,050	2950 6,400	*2600 *5,700	2100 4,750	9800 380



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)












323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

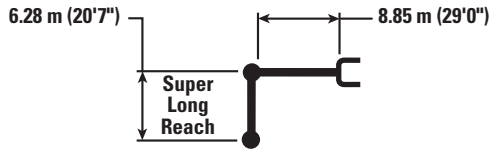Region: ADSD-N

Long Undercarriage



		9000 mm/360 in		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in				mm in
												
12 000 mm 480 in	kg lb									*1250 *2,800	*1250 *2,800	10 350 400
10 500 mm 420 in	kg lb			*2150 *4,700	*2150 *4,700					*1200 *2,600	*1200 *2,600	11 660 460
9000 mm 360 in	kg lb			*2150 *4,700	*2150 *4,700	*2000 *3,650	*2000 *3,650			*1150 *2,450	*1150 *2,450	12 660 500
7500 mm 300 in	kg lb			*2200 *4,850	*2200 *4,850	*2150 *4,750	2000 4,250			*1100 *2,400	*1100 *2,400	13 410 530
6000 mm 240 in	kg lb			*2350 *5,100	*2350 *5,100	*2250 *4,900	1950 4,150	*1850 *3,250	1500 3,150	*1100 *2,400	*1100 *2,400	13 970 550
4500 mm 180 in	kg lb	*2750 *5,950	*2750 *5,950	*2500 *5,450	2400 5,100	*2350 *5,100	1850 3,950	*2250 *4,600	1450 3,100	*1100 *2,400	*1100 *2,400	14 340 570
3000 mm 120 in	kg lb	*3050 *6,600	2850 6,150	*2700 *5,900	2250 4,800	*2500 *5,400	1750 3,750	*2300 5,000	1400 2,950	*1150 *2,500	*1150 *2,500	14 550 580
1500 mm 60 in	kg lb	*3350 *7,250	2650 5,650	*2900 *6,300	2100 4,450	*2600 *5,700	1650 3,550	2300 4,850	1350 2,850	*1200 *2,600	1150 2,500	14 600 580
0 mm 0 in	kg lb	*3650 *7,850	2450 5,200	*3100 *6,750	1950 4,150	2650 5,700	1600 3,350	2200 4,750	1300 2,750	*1250 *2,750	1150 2,450	14 490 570
-1500 mm -60 in	kg lb	*3850 8,300	2300 4,900	3100 6,700	1850 3,900	2600 5,550	1500 3,200	2150 4,650	1250 2,650	*1350 *2,950	1150 2,500	14 230 560
-3000 mm -120 in	kg lb	3750 8,050	2150 4,650	3050 6,550	1750 3,750	2550 5,400	1450 3,100	2150 *3,650	1200 2,600	*1500 *3,300	1200 2,600	13 790 550
-4500 mm -180 in	kg lb	3700 7,950	2100 4,550	3000 6,450	1700 3,700	2500 5,400	1450 3,050			*1700 *3,750	1250 2,800	13 170 520
-6000 mm -240 in	kg lb	3700 7,950	2150 4,550	3000 6,500	1750 3,700	2550 *5,150	1450 3,150			*2000 *4,450	1400 3,150	12 340 490
-7500 mm -300 in	kg lb	*3650 *7,750	2200 4,700	*2950 *6,250	1800 3,900					*2500 *5,650	1650 3,700	11 240 440
-9000 mm -360 in	kg lb	*3050 *6,300	2350 5,050							*2600 *5,700	2100 4,750	9800 380



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.










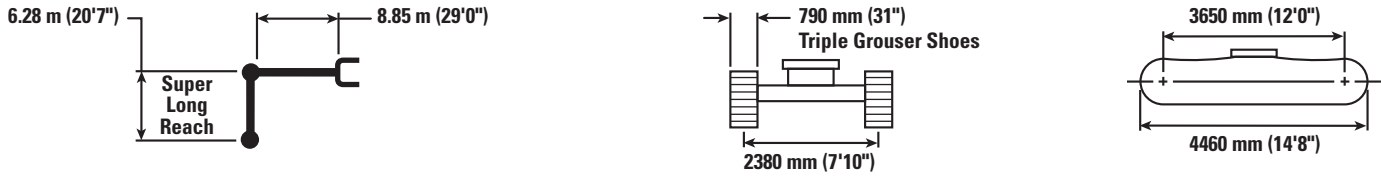




323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: ADSD-N

Long Undercarriage



	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in		
															
12 000 mm 480 in	kg												*1250	*1250	10 350
	lb												*2,800	*2,800	400
10 500 mm 420 in	kg												*1200	*1200	11 660
	lb												*2,600	*2,600	460
9000 mm 360 in	kg												*1150	*1150	12 660
	lb												*2,450	*2,450	500
7500 mm 300 in	kg												*1100	*1100	13 410
	lb												*2,400	*2,400	530
6000 mm 240 in	kg												*1100	*1100	13 970
	lb												*2,400	*2,400	550
4500 mm 180 in	kg												*1100	*1100	14 340
	lb												*2,400	*2,400	570
3000 mm 120 in	kg			*4700	*4700	*5950	*5950	*4350	*4350	*3550	*3550	*1150	*1150	14 550	
	lb			*11,850	*11,850	*12,700	*12,700	*9,400	*9,400	*7,650	*7,650	*2,500	*2,500	580	
1500 mm 60 in	kg					*6750	*6750	*5150	4750	*4000	3550	*1200	*1200	14 600	
	lb					*15,750	14,850	*11,050	10,250	*8,700	7,600	*2,600	*2,600	580	
0 mm 0 in	kg			*2000	*2000	*4650	*4650	*5750	4300	*4450	3200	*1250	1200	14 490	
	lb			*4,550	*4,550	*10,700	*10,700	*12,400	9,250	*9,550	6,950	*2,750	2,550	570	
-1500 mm -60 in	kg	*2050	*2050	*2700	*2700	*4650	*4650	*6100	4000	*4700	3000	*1350	1200	14 230	
	lb	*4,550	*4,550	*6,050	*6,050	*10,500	*10,500	*13,250	8,600	*10,200	6,450	*2,950	2,600	560	
-3000 mm -120 in	kg	*2850	*2850	*3500	*3500	*5200	*5200	*6250	3850	*4900	2850	*1500	1250	13 790	
	lb	*6,350	*6,350	*7,850	*7,850	*11,750	*11,750	*13,550	8,300	*10,550	6,150	*3,300	2,700	550	
-4500 mm -180 in	kg	*3650	*3650	*4400	*4400	*6050	5800	*6250	3800	*4900	2800	*1700	1350	13 170	
	lb	*8,150	*8,150	*9,900	*9,900	*13,700	12,400	*13,450	8,200	10,600	6,050	*3,750	2,900	520	
-6000 mm -240 in	kg	*4550	*4550	*5400	*5400	*7200	5900	*6000	3850	*4750	2850	*2000	1500	12 340	
	lb	*10,100	*10,100	*12,150	*12,150	*16,350	12,700	*12,900	8,300	*10,250	6,100	*4,450	3,250	490	
-7500 mm -300 in	kg	*5500	*5500	*6550	*6550	*7100	6100	*5500	3950	*4450	2900	*2500	1750	11 240	
	lb	*12,250	*12,250	*14,800	*14,800	*15,250	13,150	*11,850	8,550	*9,500	6,250	*5,650	3,850	440	
-9000 mm -360 in	kg			*7950	*7950	*5950	*5950	*4700	4150	*3800	3050	*2600	2200	9800	
	lb			*16,950	*16,950	*12,700	*12,700	*10,050	9,000	*8,050	6,600	*5,700	4,950	380	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)













323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

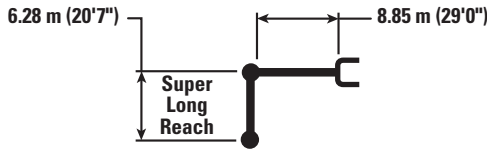Region: ADSD-N

Long Undercarriage



		9000 mm/360 in		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in				mm in
												
12 000 mm 480 in	kg lb									*1250 *2,800	*1250 *2,800	10 350 400
10 500 mm 420 in	kg lb			*2150 *4,700	*2150 *4,700					*1200 *2,600	*1200 *2,600	11 660 460
9000 mm 360 in	kg lb			*2150 *4,700	*2150 *4,700	*2000 *3,650	*2000 *3,650			*1150 *2,450	*1150 *2,450	12 660 500
7500 mm 300 in	kg lb			*2200 *4,850	*2200 *4,850	*2150 *4,750	2050 4,400			*1100 *2,400	*1100 *2,400	13 410 530
6000 mm 240 in	kg lb			*2350 *5,100	*2350 *5,100	*2250 *4,900	2000 4,250	*1850 *3,250	1550 *3,250	*1100 *2,400	*1100 *2,400	13 970 550
4500 mm 180 in	kg lb	*2750 *5,950	*2750 *5,950	*2500 *5,450	2450 5,250	*2350 *5,100	1900 4,100	*2250 *4,600	1500 3,200	*1100 *2,400	*1100 *2,400	14 340 570
3000 mm 120 in	kg lb	*3050 *6,600	2950 6,350	*2700 *5,900	2300 4,950	*2500 *5,400	1850 3,900	*2300 *5,050	1450 3,100	*1150 *2,500	*1150 *2,500	14 550 580
1500 mm 60 in	kg lb	*3350 *7,250	2700 5,850	*2900 *6,300	2150 4,600	*2600 *5,700	1750 3,700	2350 5,050	1400 2,950	*1200 *2,600	*1200 *2,600	14 600 580
0 mm 0 in	kg lb	*3650 *7,850	2500 5,400	*3100 *6,750	2000 4,300	2750 5,900	1650 3,500	2300 4,900	1350 2,850	*1250 *2,750	*1200 2,550	14 490 570
-1500 mm -60 in	kg lb	*3850 *8,300	2350 5,050	3250 6,900	1900 4,050	2650 5,700	1550 3,300	2250 4,800	1300 2,750	*1350 *2,950	1200 2,600	14 230 560
-3000 mm -120 in	kg lb	3900 8,350	2250 4,850	3150 6,750	1850 3,900	2600 5,600	1500 3,200	2250 *3,650	1250 2,700	*1500 *3,300	1250 2,700	13 790 550
-4500 mm -180 in	kg lb	3850 8,250	2200 4,750	3100 6,700	1800 3,850	2600 5,600	1500 3,200			*1700 *3,750	1350 2,900	13 170 520
-6000 mm -240 in	kg lb	3850 8,250	2200 4,750	3100 6,700	1800 3,850	2650 *5,150	1550 3,300			*2000 *4,450	1500 3,250	12 340 490
-7500 mm -300 in	kg lb	*3650 *7,750	2250 4,900	*2950 *6,250	1850 4,050					*2500 *5,650	1750 3,850	11 240 440
-9000 mm -360 in	kg lb	*3050 *6,300	2400 5,250							*2600 *5,700	2200 4,950	9800 380



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket

Region: EU

Long Undercarriage

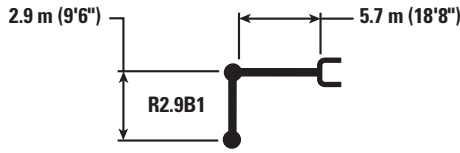

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4550	*4550			*3900 *8,700	*3900 *8,700	6150 240
6000 mm 240 in	kg lb							*4900 *10,750	*4900 *10,750			*3650 *8,000	*3650 *8,000	7290 290
4500 mm 180 in	kg lb							*5400 *11,700	*5400 *11,700	*5050 *11,100	3950 8,400	*3550 *7,850	3550 *7,850	7990 320
3000 mm 120 in	kg lb					*7850 *16,900	*7850 *16,900	*6200 *13,400	5300 11,400	*5400 *11,750	3850 8,200	*3650 *8,000	3250 7,150	8360 330
1500 mm 60 in	kg lb					*9500 *20,500	7550 16,250	*7000 *15,200	5050 10,900	5750 12,350	3700 8,000	*3850 *8,500	3150 6,900	8450 340
0 mm 0 in	kg lb			*6250 *14,300	*6250 *14,300	*10 450 *22,550	7250 15,650	*7600 *16,500	4900 10,550	5650 12,150	3600 7,800	*4250 *9,400	3200 7,000	8260 330
-1500 mm -60 in	kg lb	*6650 *14,850	*6650 *14,850	*10 750 *24,400	*10 750 *24,400	*10 550 *22,800	7200 15,450	7750 16,650	4800 10,350	5650 12,100	3600 7,750	*5000 *11,050	3450 7,550	7780 310
-3000 mm -120 in	kg lb	*11 400 *25,600	*11 400 *25,600	*14 000 *30,250	*14 000 *29,950	*9850 *21,300	7250 15,600	*7300 *15,750	4850 10,450			*6000 *13,200	4050 8,950	6950 280
-4500 mm -180 in	kg lb			*11 150 *23,850	*11 150 *23,850	*8000 *17,050	7450 16,100					*6050 *13,300	5550 12,500	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.











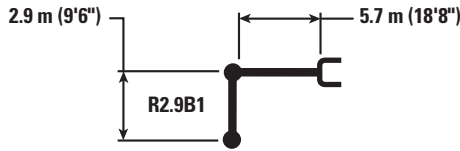



323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket – Heavy Lift On

Region: EU

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
7500 mm 300 in	kg lb							*4950	*4950			*4300	*4300	6150
6000 mm 240 in	kg lb							*5400	*5400			*3950	*3950	7290
								*11,850	*11,850			*8,750	*8,750	290
4500 mm 180 in	kg lb							*5950	5550	*5600	3950	*3900	3550	7990
								*12,900	11,900	*12,250	8,400	*8,550	7,850	320
3000 mm 120 in	kg lb					*8650	8050	*6800	5300	5900	3850	*4000	3250	8360
						*18,650	17,350	*14,800	11,400	12,650	8,200	*8,750	7,150	330
1500 mm 60 in	kg lb					*10 500	7550	*7750	5050	5750	3700	*4200	3150	8450
						*22,650	16,250	*16,750	10,900	12,350	8,000	*9,250	6,900	340
0 mm 0 in	kg lb			*6600	*6600	*11 500	7250	7800	4900	5650	3600	*4650	3200	8260
				*15,150	*15,150	*24,900	15,650	16,800	10,550	12,150	7,800	*10,250	7,000	330
-1500 mm -60 in	kg lb	*7050	*7050	*11 400	*11 400	*11 650	7200	7750	4800	5650	3600	5350	3450	7780
		*15,750	*15,750	*25,850	*25,850	*25,200	15,450	16,650	10,350	12,100	7,750	11,800	7,550	310
-3000 mm -120 in	kg lb	*12 100	*12 100	*15 450	14 000	*10 900	7250	7800	4850			6350	4050	6950
		*27,100	*27,100	*33,400	29,950	*23,550	15,600	16,750	10,450			14,050	8,950	280
-4500 mm -180 in	kg lb			*12 350	*12 350	*8850	7450					*6700	5550	5600
				*26,400	*26,400	*18,900	16,100					*14,750	12,500	220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










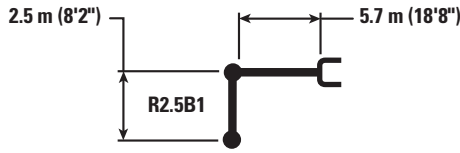

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket

Region: EU

Long Undercarriage



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*4750 *10,500	*4750 *10,500	5600 220
6000 mm 240 in	kg lb					*5300 *11,600	*5300 *11,600			*4350 *9,550	*4350 *9,550	6830 270
4500 mm 180 in	kg lb			*6650 *14,350	*6650 *14,350	*5700 *12,450	5450 11,750	*4800 3850		*4250 *9,350	3800 8,450	7570 300
3000 mm 120 in	kg lb			*8400 *18,050	7900 17,050	*6450 *14,000	5250 11,250	*5600 *12,250	3800 8,150	*4350 *9,550	3450 7,600	7960 320
1500 mm 60 in	kg lb			*9900 *21,350	7450 16,050	*7250 *15,650	5000 10,800	5750 12,300	3700 7,950	*4650 *10,200	3350 7,350	8050 320
0 mm 0 in	kg lb			*10 550 *22,850	7250 15,550	*7700 *16,700	4850 10,500	5650 12,150	3600 7,800	*5200 *11,400	3400 7,500	7860 310
-1500 mm -60 in	kg lb	*11 300 *25,750	*11 300 *25,750	*10 400 *22,600	7200 15,500	*7750 *16,650	4850 10,400			5800 12,850	3700 8,200	7350 290
-3000 mm -120 in	kg lb	*13 100 *28,350	*13 100 *28,350	*9500 *20,500	7300 15,700	*7000 *15,000	4900 10,600			*6250 *13,800	4500 9,900	6470 260
-4500 mm -180 in	kg lb			*7050 *14,850	*7050 *14,850					*6150 *13,400	*6150 *13,400	4980 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.








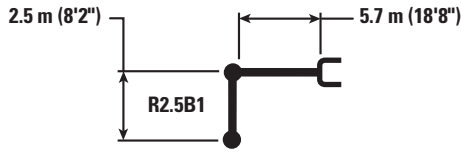



323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 4.1 mt (9,040 lb) – without Bucket – Heavy Lift On

Region: EU

Long Undercarriage



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*5150 *11,450	*5150 *11,450	5600 220
6000 mm 240 in	kg lb					*5850 *12,800	5600 12,050			*4750 *10,450	4550 10,150	6830 270
4500 mm 180 in	kg lb			*7350 *15,800	*7350 *15,800	*6300 *13,700	5450 11,750	*5200	3850	*4650 *10,200	3800 8,450	7570 300
3000 mm 120 in	kg lb			*9250 *19,900	7900 17,050	*7150 *15,500	5250 11,250	5850 12,550	3800 8,150	*4750 *10,450	3450 7,600	7960 320
1500 mm 60 in	kg lb			*10 900 *23,550	7450 16,050	7950 17,100	5000 10,800	5750 12,300	3700 7,950	*5050 *11,100	3350 7,350	8050 320
0 mm 0 in	kg lb			*11 650 *25,200	7250 15,550	7800 16,750	4850 10,500	5650 12,150	3600 7,800	5300 11,650	3400 7,500	7860 310
-1500 mm -60 in	kg lb	*12 000 *27,250	*12 000 *27,250	*11 500 *24,950	7200 15,500	7750 16,650	4850 10,400			5800 12,850	3700 8,200	7350 290
-3000 mm -120 in	kg lb	*14 450 *31,300	14 100 30,250	*10 500 *22,650	7300 15,700	*7750 *16,600	4900 10,600			*6950 *15,300	4500 9,900	6470 260
-4500 mm -180 in	kg lb			*7850 *16,450	7600 16,400					*6800 *14,900	6600 *14,900	4980 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Regions: EU, ANZ

Long Undercarriage

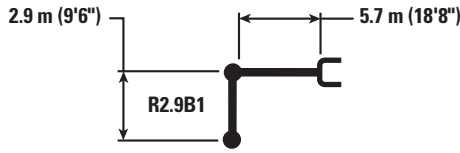

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4550	*4550			*3900 *8,700	*3900 *8,700	6150 240
6000 mm 240 in	kg lb							*4900 *10,750	*4900 *10,750			*3650 *8,000	*3650 *8,000	7290 290
4500 mm 180 in	kg lb							*5400 *11,700	*5400 *11,700	*5050 *11,100	4550 9,750	*3550 *7,850	*3550 *7,850	7990 320
3000 mm 120 in	kg lb					*7850 *16,900	*7850 *16,900	*6200 *13,400	6100 13,150	*5400 *11,750	4450 9,550	*3650 *8,000	*3650 *8,000	8360 330
1500 mm 60 in	kg lb					*9500 *20,500	8700 18,750	*7000 *15,150	5850 12,600	*5800 *12,600	4300 9,300	*3850 *8,500	3650 8,050	8450 340
0 mm 0 in	kg lb			*6250 *14,300	*6250 *14,300	*10 450 *22,550	8450 18,150	*7600 *16,450	5700 12,250	*6100 *13,200	4250 9,100	*4250 *9,400	3750 8,200	8260 330
-1500 mm -60 in	kg lb	*6650 *14,850	*6650 *14,850	*10 750 *24,400	*10 750 *24,400	*10 550 *22,800	8350 17,950	*7800 *16,850	5600 12,100	*6050 *13,050	4200 9,050	*5000 *11,050	4000 8,850	7780 310
-3000 mm -120 in	kg lb	*11 400 *25,600	*11 400 *25,600	*13 950 *30,250	*13 950 *30,250	*9850 *21,300	8400 18,100	*7300 *15,750	5650 12,200			*6000 *13,200	4700 10,400	6950 280
-4500 mm -180 in	kg lb			*11 150 *23,850	*11 150 *23,850	*8000 *17,050	*8000 *17,050					*6050 *13,300	*6050 *13,300	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Regions: EU, ANZ

Long Undercarriage

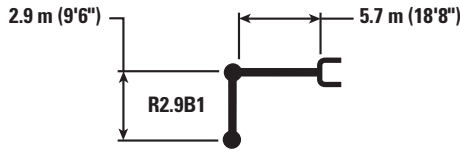

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
7500 mm 300 in	kg lb							*4950	*4950			*4300	*4300	6150 240
6000 mm 240 in	kg lb							*5400	*5400			*3950	*3950	7290 290
4500 mm 180 in	kg lb							*5950	*5950	*5600	4550	*3900	*3900	7990 320
3000 mm 120 in	kg lb					*8650	*8650	*6800	6100	*5950	4450	*4000	3800	8360 330
1500 mm 60 in	kg lb					*10 500	8700	*7750	5850	*6400	4300	*4200	3650	8450 340
0 mm 0 in	kg lb			*6600	*6600	*11 500	8450	*8400	5700	6450	4250	*4650	3750	8260 330
-1500 mm -60 in	kg lb	*7050	*7050	*11 400	*11 400	*11 650	8350	*8600	5600	6400	4200	*5500	4000	7780 310
-3000 mm -120 in	kg lb	*12 100	*12 100	*15 450	*15 450	*10 900	8400	*8100	5650			*6650	4700	6950 280
-4500 mm -180 in	kg lb			*12 300	*12 300	*8850	8650					*6700	6400	5600 220



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










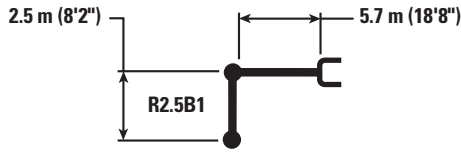

323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Regions: EU, ANZ

Long Undercarriage



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*4750 *10,500	*4750 *10,500	5600 220
6000 mm 240 in	kg lb					*5300 *11,600	*5300 *11,600			*4350 *9,550	*4350 *9,550	6830 270
4500 mm 180 in	kg lb			*6650 *14,350	*6650 *14,350	*5700 *12,450	*5700 *12,450	*4800 4450	4450	*4250 *9,350	*4250 *9,350	7570 300
3000 mm 120 in	kg lb			*8400 *18,000	*8400 *18,000	*6450 *14,000	6050 13,000	*5600 *12,250	4400 9,450	*4350 *9,550	4000 8,850	7960 320
1500 mm 60 in	kg lb			*9900 *21,300	8600 18,550	*7250 *15,650	5800 12,500	*5950 *12,900	4300 9,250	*4650 *10,200	3900 8,550	8050 320
0 mm 0 in	kg lb			*10 550 *22,850	8400 18,050	*7700 *16,700	5650 12,200	*6150 *13,300	4250 9,100	*5200 *11,400	4000 8,750	7860 310
-1500 mm -60 in	kg lb	*11 300 *25,750	*11 300 *25,750	*10 400 *22,550	8350 18,000	*7750 *16,750	5600 12,100			*6100 *13,400	4350 9,550	7350 290
-3000 mm -120 in	kg lb	*13 050 *28,300	*13 050 *28,300	*9500 *20,500	8450 18,250	*7000 *15,000	5700 12,300			*6250 *13,800	5200 11,550	6470 260
-4500 mm -180 in	kg lb			*7050 *14,800	*7050 *14,800					*6150 *13,400	*6150 *13,400	4980 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












323F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Regions: EU, ANZ

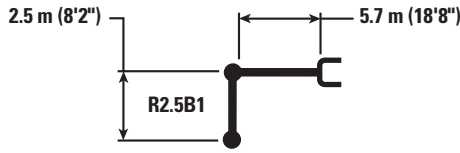Long Undercarriage



		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
												
7500 mm 300 in	kg lb									*5150 *11,450	*5150 *11,450	5600 220
6000 mm 240 in	kg lb					*5850 *12,800	*5850 *12,800			*4750 *10,450	*4750 *10,450	6830 270
4500 mm 180 in	kg lb			*7350 *15,800	*7350 *15,800	*6300 *13,700	6250 13,500	*5200 4450		*4650 *10,200	4400 9,750	7570 300
3000 mm 120 in	kg lb			*9250 *19,850	9050 19,550	*7150 *15,450	6050 13,000	*6200 *13,550	4400 9,450	*4750 *10,450	4000 8,850	7960 320
1500 mm 60 in	kg lb			*10 900 *23,500	8600 18,550	*8000 *17,300	5800 12,500	6500 14,000	4300 9,250	*5050 *11,100	3900 8,550	8050 320
0 mm 0 in	kg lb			*11 650 *25,200	8400 18,050	*8550 *18,450	5650 12,200	6400 13,850	4250 9,100	*5650 *12,450	4000 8,750	7860 310
-1500 mm -60 in	kg lb	*12 000 *27,250	*12 000 *27,250	*11 500 *24,900	8350 18,000	*8550 *18,500	5600 12,100			6600 14,550	4350 9,550	7350 290
-3000 mm -120 in	kg lb	*14 450 *31,300	*14 450 *31,300	*10 500 *22,650	8450 18,250	*7750 *16,600	5700 12,300			*6950 *15,250	5200 11,550	6470 260
-4500 mm -180 in	kg lb			*7850 *16,450	*7850 *16,450					*6800 *14,900	*6800 *14,900	4980 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.









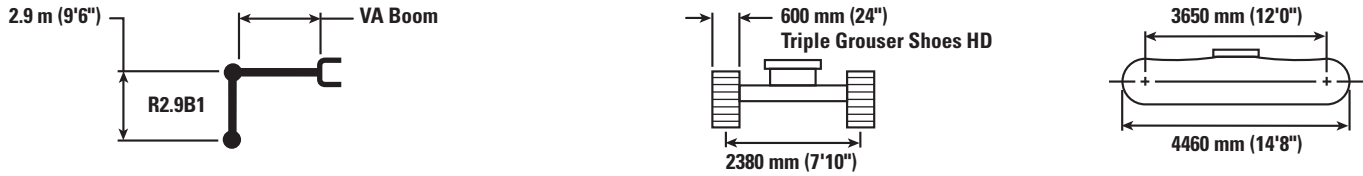




323F L Hydraulic Excavator Lift Charts

Variable Angle Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Region: EU

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
9000 mm 360 in	kg lb					*4950 *11,350	*4950 *11,350					*5050 *11,350	*5050 *11,350	4880 190
7500 mm 300 in	kg lb					*6850 *14,950	*6850 *14,950	*4250 *9,500	*4250 *9,500			*4250 *9,450	*4250 *9,450	6620 260
6000 mm 240 in	kg lb					*6850 *14,850	*6850 *14,850	*4750 *8,900	*4750 *8,900	*4050 *8,900	*4050 *8,900	*4000 *8,800	*4000 *8,800	7690 300
4500 mm 180 in	kg lb			*10 600 *23,100	*10 600 *23,100	*6650 *14,350	*6650 *14,350	*4750 *10,100	*4750 *10,100	*4100 *8,800	*4100 *8,800	*3900 *8,600	3700 8,150	8350 330
3000 mm 120 in	kg lb	*18,450	*18,450	*10 000 *21,850	*10 000 *21,850	*6400 *14,050	*6400 *14,050	*4900 *10,700	*4900 *10,700	*4300 *9,600	4250 9,150	*3950 *8,700	3400 7,450	8710 350
1500 mm 60 in	kg lb			*6250 *14,100	*6250 *14,100	*7250 *15,600	*7250 *15,600	*5550 *12,050	*5550 *12,050	*4850 *10,150	4100 8,800	*4150 *9,100	3250 7,200	8790 350
0 mm 0 in	kg lb	*6950 *14,950	*6950 *14,950	*5700 *12,250	*5700 *12,250	*9400 *20,200	7950 17,100	*6450 *13,950	5350 11,550	*5450 *12,150	4000 8,600	*4500 *9,900	3300 7,300	8610 340
-1500 mm -60 in	kg lb	*8550 *19,050	*8550 *19,050	*8800 *19,950	*8800 *19,950	*10 250 *22,250	7850 16,950	*7850 *17,050	5300 11,400	*5950 *12,750	3950 8,500	*4950 *10,900	3550 7,850	8160 320
-3000 mm -120 in	kg lb	*13 550 *30,250	*13 550 *30,250	*11 700 *25,350	*11 700 *25,350	*8100 *17,450	8050 17,150	*6300 *13,450	5350 11,500			*4350 *9,800	4150 9,200	7340 290
-4500 mm -180 in	kg lb	*21 150 *47,500	*21 150 *47,500	*12 000 *26,150	*12 000 *26,150	*7650 *16,750	*7650 *16,750					*6350 *14,400	*6350 *14,400	5350 210



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

323F L Hydraulic Excavator Lift Charts

Variable Angle Boom – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Region: EU

Long Undercarriage

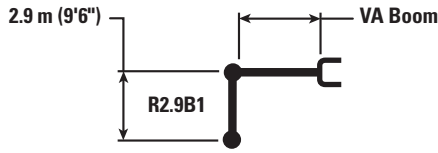

		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in		mm in		
9000 mm 360 in	kg lb					*5400 *12,300	*5400 *12,300					*5450 *12,300	*5450 *12,300	4880 190
7500 mm 300 in	kg lb					*7400 *16,250	*7400 *16,250	*4600 *10,350	*4600 *10,350			*4650 *10,300	*4650 *10,300	6620 260
6000 mm 240 in	kg lb					*7500 *16,250	*7500 *16,250	*5200 *9,650	*5200 *9,650	*4400 *9,550	*4400 *9,550	*4350 *9,550	4300 9,500	7690 300
4500 mm 180 in	kg lb			*11 600 *25,250	*11 600 *25,250	*7300 *15,750	*7300 *15,750	*5200 *11,150	*5200 *11,150	*4450 *9,550	4400 9,450	*4250 *9,350	3700 8,150	8350 330
3000 mm 120 in	kg lb	*19,500	*19,500	*11 000 *24,000	*11 000 *24,000	*7050 *15,500	*7050 *15,500	*5200 *11,350	*5200 *11,350	*4700 *10,400	4250 9,150	*4300 *9,450	3400 7,450	8710 350
1500 mm 60 in	kg lb			*6600 *14,900	*6600 *14,900	*7650 *16,550	*7650 *16,550	*5900 *12,750	5600 12,050	*5250 *11,050	4100 8,800	*4500 *9,900	3250 7,200	8790 350
0 mm 0 in	kg lb	*7350 *15,800	*7350 *15,800	*6000 *12,950	*6000 *12,950	*9950 *21,350	7950 17,100	*6850 *14,800	5350 11,550	*5900 *13,200	4000 8,600	*4900 *10,750	3300 7,300	8610 340
-1500 mm -60 in	kg lb	*9050 *20,150	*9050 *20,150	*9300 *21,100	*9300 *21,100	*11 200 *24,350	7850 16,950	*8300 *18,250	5300 11,400	6200 13,400	3950 8,500	*5450 *12,000	3550 7,850	8160 320
-3000 mm -120 in	kg lb	*14 300 *32,000	*14 300 *32,000	*12 800 *27,750	*12 800 *27,750	*8850 *19,100	8000 17,150	*6900 *14,750	5350 11,500			*4800 *10,800	4150 9,200	7340 290
-4500 mm -180 in	kg lb	*22 350 *50,250	*22 350 *50,250	*13 100 *28,550	*13 100 *28,550	*8350 *18,350	8250 17,850					*6950 *15,750	6500 14,900	5350 210



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.









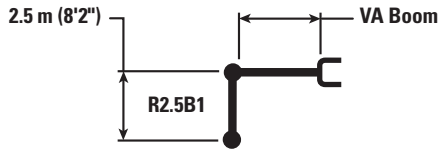




323F L Hydraulic Excavator Lift Charts

Variable Angle Boom Lift Capacities – Counterweight: 5.35 mt (11,700 lb) – without Bucket

Region: EU

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
9000 mm 360 in	kg lb											*6200 *14,100	*6200 *14,100	4110 150
7500 mm 300 in	kg lb					*6850 *14,900	*6850 *14,900	*5200 *11,200	*5200 *11,200			*5050 *11,200	*5050 *11,200	6080 240
6000 mm 240 in	kg lb					*6800 *14,600	*6800 *14,600	*4750 *10,450	*4750 *10,450			*4650 *10,300	4650 *10,300	7230 290
4500 mm 180 in	kg lb			*10 400 *22,600	*10 400 *22,600	*6650 *14,350	*6650 *14,350	*4650 *10,800	*4650 *10,800	*4700 *10,450	4350 9,300	*4550 *10,050	3950 8,750	7930 310
3000 mm 120 in	kg lb			*9650 *21,850	*9650 *21,850	*6450 *13,900	*6450 *13,900	*5200 *11,300	*5200 *11,300	*4900 *11,250	4200 9,050	*4650 *10,200	3600 7,900	8300 330
1500 mm 60 in	kg lb			*7050 *14,400	*7050 *14,400	*7800 *16,750	*7800 *16,750	*5850 *12,700	5500 11,900	*5650 *12,300	4050 8,750	*4850 *10,700	3500 7,650	8390 330
0 mm 0 in	kg lb	*9650 *20,900	*9650 *20,900	*6350 *14,100	*6350 *14,100	*10 150 *21,700	7900 17,000	*6800 *14,700	5350 11,500	6250 13,450	4000 8,550	*5350 *11,700	3550 7,800	8210 330
-1500 mm -60 in	kg lb	*10 700 *23,800	*10 700 *23,800	*9700 *21,650	*9700 *21,650	*9650 *20,950	7900 17,000	*7550 *16,300	5300 11,400	*5500 *11,600	4000 8,600	*5100 *11,150	3850 8,450	7720 310
-3000 mm -120 in	kg lb	*16 600 *37,150	*16 600 *37,150	*11 900 *25,850	*11 900 *25,850	*7550 *16,300	*7550 *16,300	*5650 *11,900	5400 11,600			*4900 *10,650	4650 10,300	6770 270
-4500 mm -180 in	kg lb	*23 000 *50,700	*23 000 *50,700	*12 250 *26,400	*12 250 *26,400							*8600 *20,350	*8600 *20,350	4140 160



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.









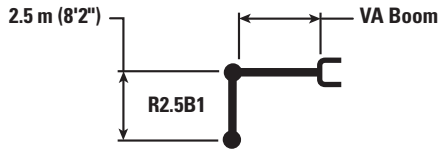




323F L Hydraulic Excavator Lift Charts

Variable Angle Boom – Counterweight: 5.35 mt (11,700 lb) – without Bucket – Heavy Lift On

Region: EU

Long Undercarriage



		1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in
														
9000 mm 360 in	kg lb											*6700 *15,350	*6700 *15,350	4110 150
7500 mm 300 in	kg lb					*7500 *16,300	*7500 *16,300	*5600 *5600				*5500 *12,200	*5500 *12,200	6080 240
6000 mm 240 in	kg lb					*7500 *16,000	*7500 *16,000	*5200 *11,350	*5200 *11,350			*5050 *11,200	4650 10,400	7230 290
4500 mm 180 in	kg lb			*11 400 *24,800	*11 400 *24,800	*7300 *15,750	*7300 *15,750	*5050 *11,750	*5050 *11,750	*5100 *11,350	4350 9,300	*4950 *10,900	3950 8,750	7930 310
3000 mm 120 in	kg lb			*10 200 *24,050	*10 200 *24,050	*7100 *15,300	*7100 *15,300	*5500 *11,950	*5500 *11,950	*5350 *12,200	4200 9,050	*5050 *11,050	3600 7,900	8300 330
1500 mm 60 in	kg lb			*7450 *15,250	*7450 *15,250	*8250 *17,700	8150 17,550	*6200 *13,450	5500 11,900	*6100 *13,350	4050 8,750	*5300 *11,600	3500 7,650	8390 330
0 mm 0 in	kg lb	*10 200 *22,100	*10 200 *22,100	*6700 *14,900	*6700 *14,900	*10 700 *22,950	7900 17,000	*7200 *15,600	5350 11,500	6250 13,450	4000 8,550	5550 12,150	3550 7,800	8210 330
-1500 mm -60 in	kg lb	*11 300 *25,150	*11 300 *25,150	*10 250 *22,850	*10 250 *22,850	*10 550 *22,950	7900 17,000	*8300 *17,850	5300 11,400	*6050 *12,700	4000 8,600	*5600 *12,250	3850 8,450	7720 310
-3000 mm -120 in	kg lb	*17 550 *39,250	*17 550 *39,250	*13 050 *28,250	*13 050 *28,250	*8300 *17,850	8050 17,300	*6200 *13,100	5400 11,600			*5350 *11,700	4650 10,300	6770 270
-4500 mm -180 in	kg lb	*24 300	*24 300	*13 350 *28,750	*13 350 *28,750							*9350 *22,200	*9350 *22,200	4140 160



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

VA cylinder is flexible.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.















323F L Hydraulic Excavator Lift Charts

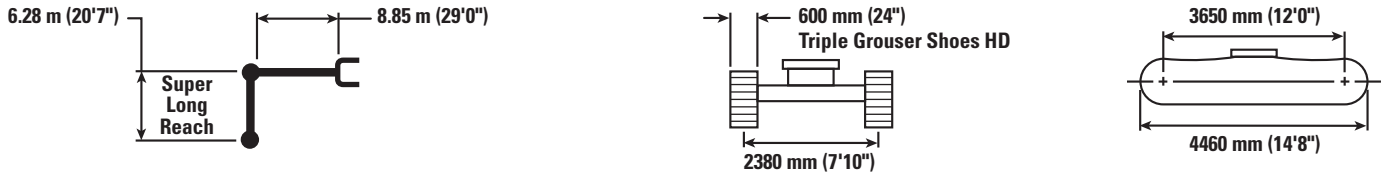Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: ANZ

Long Undercarriage



	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in		
															
12 000 mm 480 in	kg												*1250	*1250	10 350
	lb												*2,800	*2,800	400
10 500 mm 420 in	kg												*1200	*1200	11 660
	lb												*2,600	*2,600	460
9000 mm 360 in	kg												*1150	*1150	12 660
	lb												*2,450	*2,450	500
7500 mm 300 in	kg												*1100	*1100	13 410
	lb												*2,400	*2,400	530
6000 mm 240 in	kg												*1100	*1100	13 970
	lb												*2,400	*2,400	550
4500 mm 180 in	kg												*1100	*1100	14 340
	lb												*2,400	*2,400	570
3000 mm 120 in	kg			*4700	*4700	*5950	*5950	*4350	*4350	*3550	*3550	*1150	*1150	14 550	
	lb			*11,850	*11,850	*12,700	*12,700	*9,400	*9,400	*7,650	*7,650	*2,500	*2,500	580	
1500 mm 60 in	kg					*6750	*6750	*5150	4700	*4000	3500	*1200	1200	14 600	
	lb					*15,750	14,700	*11,050	10,150	*8,700	7,500	*2,600	2,550	580	
0 mm 0 in	kg			*2000	*2000	*4650	*4650	*5750	4250	*4450	3200	*1250	1150	14 490	
	lb			*4,550	*4,550	*10,700	*10,700	*12,400	9,100	*9,550	6,850	*2,750	2,550	570	
-1500 mm -60 in	kg	*2050	*2050	*2700	*2700	*4650	*4650	*6100	3950	*4700	2950	*1350	1150	14 230	
	lb	*4,550	*4,550	*6,050	*6,050	*10,500	*10,500	*13,250	8,500	*10,200	6,350	*2,950	2,550	560	
-3000 mm -120 in	kg	*2850	*2850	*3500	*3500	*5200	*5200	*6250	3800	*4900	2850	*1500	1200	13 790	
	lb	*6,350	*6,350	*7,850	*7,850	*11,750	*11,750	*13,550	8,150	*10,550	6,050	*3,300	2,650	550	
-4500 mm -180 in	kg	*3650	*3650	*4400	*4400	*6050	5700	*6250	3750	4850	2750	*1700	1300	13 170	
	lb	*8,150	*8,150	*9,900	*9,900	*13,700	12,250	*13,450	8,100	10,450	5,950	*3,750	2,850	520	
-6000 mm -240 in	kg	*4550	*4550	*5400	*5400	*7200	5800	*6000	3800	*4750	2800	*2000	1450	12 340	
	lb	*10,100	*10,100	*12,150	*12,150	*16,350	12,500	*12,900	8,200	*10,250	6,000	*4,450	3,200	490	
-7500 mm -300 in	kg	*5500	*5500	*6550	*6550	*7100	6000	*5500	3900	*4450	2850	*2500	1700	11 240	
	lb	*12,250	*12,250	*14,800	*14,800	*15,250	12,950	*11,850	8,450	*9,500	6,150	*5,650	3,800	440	
-9000 mm -360 in	kg			*7950	*7950	*5950	*5950	*4700	4100	*3800	3000	*2600	2150	9800	
	lb			*16,950	*16,950	*12,700	*12,700	*10,050	8,900	*8,050	6,500	*5,700	4,850	380	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)












323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: ANZ

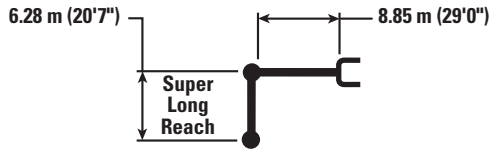Long Undercarriage



		9000 mm/360 in		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in				
												mm in
12 000 mm 480 in	kg lb									*1250 *2,800	*1250 *2,800	10 350 400
10 500 mm 420 in	kg lb			*2150 *4,700	*2150 *4,700					*1200 *2,600	*1200 *2,600	11 660 460
9000 mm 360 in	kg lb			*2150 *4,700	*2150 *4,700	*2000 *3,650	*2000 *3,650			*1150 *2,450	*1150 *2,450	12 660 500
7500 mm 300 in	kg lb			*2200 *4,850	*2200 *4,850	*2150 *4,750	2050 4,350			*1100 *2,400	*1100 *2,400	13 410 530
6000 mm 240 in	kg lb			*2350 *5,100	*2350 *5,100	*2250 *4,900	2000 4,200	*1850 *3,250	1550 *3,250	*1100 *2,400	*1100 *2,400	13 970 550
4500 mm 180 in	kg lb	*2750 *5,950	*2750 *5,950	*2500 *5,450	2450 5,200	*2350 *5,100	1900 4,050	*2250 *4,600	1500 3,150	*1100 *2,400	*1100 *2,400	14 340 570
3000 mm 120 in	kg lb	*3050 *6,600	2900 6,250	*2700 *5,900	2300 4,850	*2500 *5,400	1800 3,850	*2300 *5,050	1450 3,050	*1150 *2,500	*1150 *2,500	14 550 580
1500 mm 60 in	kg lb	*3350 *7,250	2700 5,750	*2900 *6,300	2100 4,550	*2600 *5,700	1700 3,650	2300 4,950	1400 2,900	*1200 *2,600	1200 2,550	14 600 580
0 mm 0 in	kg lb	*3650 *7,850	2500 5,350	*3100 *6,750	2000 4,250	2700 5,800	1600 3,450	2250 4,850	1300 2,800	*1250 *2,750	1150 2,550	14 490 570
-1500 mm -60 in	kg lb	*3850 *8,300	2350 5,000	3200 6,850	1900 4,000	2650 5,650	1550 3,250	2200 4,750	1250 2,700	*1350 *2,950	1150 2,550	14 230 560
-3000 mm -120 in	kg lb	3850 8,250	2200 4,750	3100 6,650	1800 3,850	2600 5,550	1500 3,150	2200 *3,650	1250 2,700	*1500 *3,300	1200 2,650	13 790 550
-4500 mm -180 in	kg lb	3800 8,100	2150 4,650	3050 6,600	1750 3,800	2550 5,500	1450 3,150			*1700 *3,750	1300 2,850	13 170 520
-6000 mm -240 in	kg lb	3800 8,150	2200 4,650	3100 6,600	1750 3,800	2600 *5,150	1500 3,250			*2000 *4,450	1450 3,200	12 340 490
-7500 mm -300 in	kg lb	*3650 *7,750	2250 4,800	*2950 *6,250	1850 4,000					*2500 *5,650	1700 3,800	11 240 440
-9000 mm -360 in	kg lb	*3050 *6,300	2400 5,150							*2600 *5,700	2150 4,850	9800 380



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.















323F L Hydraulic Excavator Lift Charts

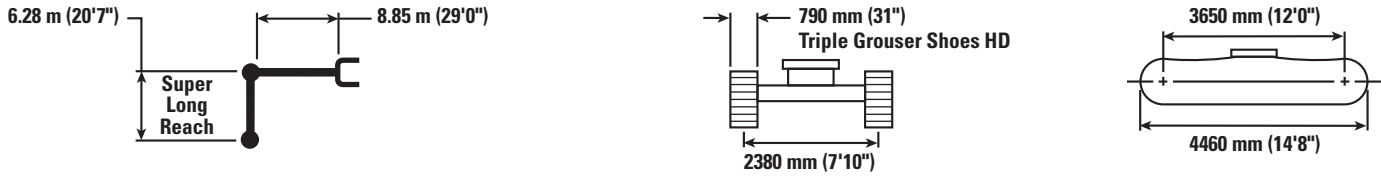Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: EU

Long Undercarriage



	1500 mm/60 in		3000 mm/120 in		4500 mm/180 in		6000 mm/240 in		7500 mm/300 in				mm in		
															
12 000 mm 480 in	kg												*1250	*1250	10 350
	lb												*2,800	*2,800	400
10 500 mm 420 in	kg												*1200	*1200	11 660
	lb												*2,600	*2,600	460
9000 mm 360 in	kg												*1150	*1150	12 660
	lb												*2,450	*2,450	500
7500 mm 300 in	kg												*1100	*1100	13 410
	lb												*2,400	*2,400	530
6000 mm 240 in	kg												*1100	*1100	13 970
	lb												*2,400	*2,400	550
4500 mm 180 in	kg												*1100	*1100	14 340
	lb												*2,400	*2,400	570
3000 mm 120 in	kg			*4700	*4700	*5950	*5950	*4350	*4350	*3550	*3550	*1150	*1150	14 550	
	lb			*11,850	*11,850	*12,700	*12,700	*9,400	*9,400	*7,650	*7,650	*2,500	*2,500	580	
1500 mm 60 in	kg					*6750	*6750	*5150	4850	*4000	3600	*1200	*1200	14 600	
	lb					*15,750	15,150	*11,050	10,450	*8,700	7,750	*2,600	*2,600	580	
0 mm 0 in	kg			*2000	*2000	*4650	*4650	*5750	4350	*4450	3300	*1250	1200	14 490	
	lb			*4,550	*4,550	*10,700	*10,700	*12,400	9,400	*9,550	7,050	*2,750	2,650	570	
-1500 mm -60 in	kg	*2050	*2050	*2700	*2700	*4650	*4650	*6100	4100	*4700	3050	*1350	1200	14 230	
	lb	*4,550	*4,550	*6,050	*6,050	*10,500	*10,500	*13,250	8,800	*10,200	6,600	*2,950	2,650	560	
-3000 mm -120 in	kg	*2850	*2850	*3500	*3500	*5200	*5200	*6250	3950	*4900	2950	*1500	1250	13 790	
	lb	*6,350	*6,350	*7,850	*7,850	*11,750	*11,750	*13,550	8,450	*10,550	6,300	*3,300	2,800	550	
-4500 mm -180 in	kg	*3650	*3650	*4400	*4400	*6050	5900	*6250	3900	*4900	2900	*1700	1350	13 170	
	lb	*8,150	*8,150	*9,900	*9,900	*13,700	12,700	*13,450	8,400	*10,600	6,200	*3,750	3,000	520	
-6000 mm -240 in	kg	*4550	*4550	*5400	*5400	*7200	6050	*6000	3950	*4750	2900	*2000	1500	12 340	
	lb	*10,100	*10,100	*12,150	*12,150	*16,350	12,950	*12,900	8,500	*10,250	6,200	*4,450	3,350	490	
-7500 mm -300 in	kg	*5500	*5500	*6550	*6550	*7100	6250	*5500	4050	*4450	2950	*2500	1800	11 240	
	lb	*12,250	*12,250	*14,800	*14,800	*15,250	13,400	*11,850	8,750	*9,500	6,400	*5,650	3,950	440	
-9000 mm -360 in	kg			*7950	*7950	*5950	*5950	*4700	4250	*3800	3100	*2600	2250	9800	
	lb			*16,950	*16,950	*12,700	*12,700	*10,050	9,200	*8,050	6,750	*5,700	5,050	380	



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)












323F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 4.7 mt (10,360 lb) – without Bucket

Region: EU

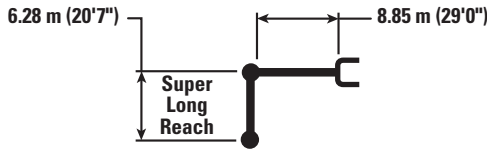Long Undercarriage



		9000 mm/360 in		10 500 mm/420 in		12 000 mm/480 in		13 500 mm/540 in				
												mm in
12 000 mm 480 in	kg lb									*1250 *2,800	*1250 *2,800	10 350 400
10 500 mm 420 in	kg lb			*2150 *4,700	*2150 *4,700					*1200 *2,600	*1200 *2,600	11 660 460
9000 mm 360 in	kg lb			*2150 *4,700	*2150 *4,700	*2000 *3,650	*2000 *3,650			*1150 *2,450	*1150 *2,450	12 660 500
7500 mm 300 in	kg lb			*2200 *4,850	*2200 *4,850	*2150 *4,750	2100 4,450			*1100 *2,400	*1100 *2,400	13 410 530
6000 mm 240 in	kg lb			*2350 *5,100	*2350 *5,100	*2250 *4,900	2050 4,350	*1850 *3,250	1600 *3,250	*1100 *2,400	*1100 *2,400	13 970 550
4500 mm 180 in	kg lb	*2750 *5,950	*2750 *5,950	*2500 *5,450	2500 5,350	*2350 *5,100	1950 4,200	*2250 *4,600	1550 3,300	*1100 *2,400	*1100 *2,400	14 340 570
3000 mm 120 in	kg lb	*3050 *6,600	3000 6,450	*2700 *5,900	2350 5,000	*2500 *5,400	1850 3,950	*2300 *5,050	1500 3,150	*1150 *2,500	*1150 *2,500	14 550 580
1500 mm 60 in	kg lb	*3350 *7,250	2800 5,950	*2900 *6,300	2200 4,700	*2600 *5,700	1750 3,750	2400 5,150	1450 3,050	*1200 *2,600	*1200 *2,600	14 600 580
0 mm 0 in	kg lb	*3650 *7,850	2550 5,500	*3100 *6,750	2050 4,400	*2750 *5,950	1650 3,550	2350 5,000	1350 2,900	*1250 *2,750	1200 2,650	14 490 570
-1500 mm -60 in	kg lb	*3850 *8,300	2400 5,150	*3250 *7,050	1950 4,150	2750 5,850	1600 3,400	2300 4,950	1350 2,850	*1350 *2,950	1200 2,650	14 230 560
-3000 mm -120 in	kg lb	3950 8,500	2300 4,950	3200 6,900	1850 4,000	2700 5,750	1550 3,300	2300 *3,650	1300 2,800	*1500 *3,300	1250 2,800	13 790 550
-4500 mm -180 in	kg lb	3900 8,400	2250 4,850	3200 6,850	1850 3,950	2650 5,700	1550 3,300			*1700 *3,750	1350 3,000	13 170 520
-6000 mm -240 in	kg lb	*3900 *8,400	2250 4,850	3200 6,850	1850 3,950	2700 *5,150	1550 3,350			*2000 *4,450	1500 3,350	12 340 490
-7500 mm -300 in	kg lb	*3650 *7,750	2350 5,000	*2950 *6,250	1900 4,150					*2500 *5,650	1800 3,950	11 240 440
-9000 mm -360 in	kg lb	*3050 *6,300	2450 5,350							*2600 *5,700	2250 5,050	9800 380



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

For more complete information on Cat® products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEXQ1731 (02-2016)

© 2016 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

