

330F L

Hydraulic Excavator






Lift Capacity Specifications










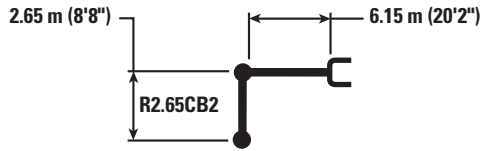

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Regions: EU, ANZ

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*17,450	*17,450			*6750	*6750	6670 260
6.0 m 20.0 ft	kg lb					*8150	*8150	*7700	5900	*6350	5650	7700 300
4.5 m 15.0 ft	kg lb			*11 200	*11 200	*9150	8150	*8150	5800	*6250	4950	8340 330
3.0 m 10.0 ft	kg lb			*14 100	11 750	*10 450	7800	8700	5650	*6400	4600	8670 340
1.5 m 5.0 ft	kg lb			*15 600	11 150	*11 650	7450	8550	5500	*6800	4450	8720 350
0 m 0 ft	kg lb			*16 600	10 900	11 700	7300	8400	5400	7050	4550	8510 340
-1.5 m -5.0 ft	kg lb	*9750	*9750	*16 350	10 900	11 650	7200	8400	5350	7650	4950	8020 320
-3.0 m -10.0 ft	kg lb	*18 350	*18 350	*14 900	11 000	*11 300	7300			*8900	5800	7180 290
-4.5 m -15.0 ft	kg lb	*15 700	*15 700	*11 900	11 300					*8650	7850	5830 230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












330F L Hydraulic Excavator Lift Charts

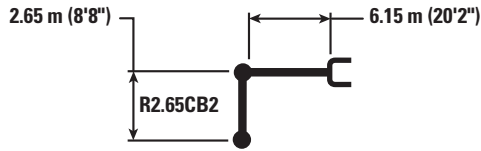Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Regions: EU, ANZ

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*19,200	18,250			*7350	7150	6670
6.0 m 20.0 ft	kg lb					*8950	8400	*8400	5900	*6900	5650	7700
						*19,500	18,100	*15,750	12,650	*15,250	12,600	300
4.5 m 15.0 ft	kg lb			*12 300	*12 300	*10 050	8150	8900	5800	*6850	4950	8340
				*26,400	*26,400	*21,750	17,500	19,100	12,500	*15,050	10,900	330
3.0 m 10.0 ft	kg lb			*15 500	11 750	*11 500	7800	8700	5650	7000	4600	8670
				*33,350	25,300	*24,900	16,750	18,750	12,200	*15,400	10,100	340
1.5 m 5.0 ft	kg lb			*16 550	11 150	11 950	7450	8550	5500	6850	4450	8720
				*38,500	24,000	25,650	16,100	18,350	11,850	15,050	9,800	350
0 m 0 ft	kg lb			*17 550	10 900	11 700	7300	8400	5400	7050	4550	8510
				*40,150	23,500	25,150	15,700	18,100	11,600	15,500	10,050	340
-1.5 m -5.0 ft	kg lb	*10 350	*10 350	*18 000	10 900	11 650	7200	8400	5350	7650	4950	8020
		*23,650	*23,650	*39,100	23,450	25,000	15,550	18,050	11,550	16,850	10,900	320
-3.0 m -10.0 ft	kg lb	*19 400	*19 400	*16 450	11 000	11 700	7300			9050	5800	7180
		*44,200	*44,200	*35,600	23,700	25,200	15,700			20,050	12,800	290
-4.5 m -15.0 ft	kg lb	*17 350	*17 350	*13 150	11 300					*9600	7850	5830
				*28,050	24,350					*21,050	17,650	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with $\pm 5\%$ for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










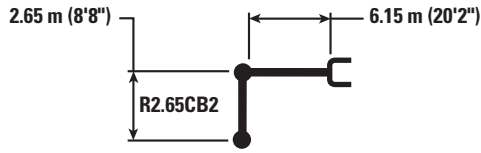

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: EU

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*17,450	*17,450			*6750	*6750	6670 260
6.0 m 20.0 ft	kg lb					*8150	*8150	*7700	5950	*6350	5700	7700 300
4.5 m 15.0 ft	kg lb			*11 200	*11 200	*9150	8200	*8150	5900	*6250	5000	8340 330
3.0 m 10.0 ft	kg lb			*14 100	11 850	*10 450	7850	*8750	5700	*6400	4650	8670 340
1.5 m 5.0 ft	kg lb			*15 600	11 250	*11 650	7550	8600	5550	*6800	4500	8720 350
0 m 0 ft	kg lb			*16 600	11 050	11 850	7350	8500	5450	7100	4600	8510 340
-1.5 m -5.0 ft	kg lb	*9750	*9750	*16 350	11 000	11 750	7300	8450	5400	7750	5000	8020 320
-3.0 m -10.0 ft	kg lb	*18 350	*18 350	*14 900	11 150	*11 300	7350			*8900	5850	7180 290
-4.5 m -15.0 ft	kg lb	*15 700	*15 700	*11 900	11 400					*8650	7950	5830 230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












330F L Hydraulic Excavator Lift Charts

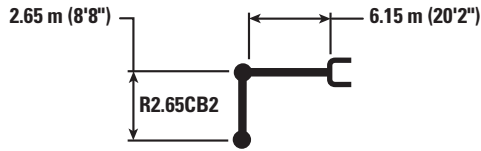Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: EU

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*19,200	18,400			*7350	7200	6670
6.0 m 20.0 ft	kg lb					*8950	8500	*8400	5950	*6900	5700	7700
						*19,500	18,250	*15,750	12,800	*15,250	12,700	300
4.5 m 15.0 ft	kg lb			*12 300	*12 300	*10 050	8200	9000	5900	*6850	5000	8340
				*26,400	*26,400	*21,750	17,700	19,300	12,650	*15,050	11,000	330
3.0 m 10.0 ft	kg lb			*15 500	11 850	*11 500	7850	8800	5700	*7000	4650	8670
				*33,350	25,550	*24,900	16,950	18,900	12,300	*15,400	10,200	340
1.5 m 5.0 ft	kg lb			*16 550	11 250	12 050	7550	8600	5550	6900	4500	8720
				*38,500	24,250	25,900	16,250	18,550	11,950	15,250	9,900	350
0 m 0 ft	kg lb			*17 550	11 050	11 850	7350	8500	5450	7100	4600	8510
				*40,150	23,750	25,450	15,850	18,300	11,750	15,650	10,150	340
-1.5 m -5.0 ft	kg lb	*10 350	*10 350	*18 000	11 000	11 750	7300	8450	5400	7750	5000	8020
		*23,650	*23,650	*39,100	23,700	25,300	15,700	18,250	11,700	17,050	11,000	320
-3.0 m -10.0 ft	kg lb	*19 400	*19 400	*16 450	11 150	11 850	7350			9150	5850	7180
		*44,200	*44,200	*35,600	23,950	25,450	15,850			20,250	12,950	290
-4.5 m -15.0 ft	kg lb	*17 350	*17 350	*13 150	11 400					*9600	7950	5830
				*28,050	24,600					*21,050	17,850	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.










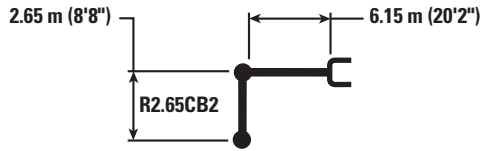

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Regions: EU, ANZ

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m	kg									*6750	*6750	6670
25.0 ft	lb					*17,450	*17,450			*14,950	*14,950	260
6.0 m	kg					*8150	*8150	*7700	6100	*6350	5800	7700
20.0 ft	lb					*17,750	*17,750	*14,450	13,000	*14,000	12,950	300
4.5 m	kg			*11 200	*11 200	*9150	8350	*8150	6000	*6250	5100	8340
15.0 ft	lb			*24,050	*24,050	*19,800	18,000	*17,800	12,850	*13,800	11,250	330
3.0 m	kg			*14 100	12 050	*10 450	8000	*8750	5850	*6400	4700	8670
10.0 ft	lb			*30,300	26,000	*22,600	17,250	*19,050	12,550	*14,100	10,400	340
1.5 m	kg			*15 600	11 450	*11 650	7700	8800	5650	*6800	4600	8720
5.0 ft	lb			*35,000	24,700	*25,150	16,550	18,900	12,200	*14,950	10,100	350
0 m	kg			*16 600	11 250	12 050	7500	8650	5550	7250	4700	8510
0 ft	lb			*36,450	24,200	25,950	16,150	18,650	11,950	15,950	10,350	340
-1.5 m	kg	*9750	*9750	*16 350	11 250	12 000	7450	8650	5550	7900	5100	8020
-5.0 ft	lb	*22,300	*22,300	*35,450	24,150	25,800	16,000	18,600	11,900	17,400	11,200	320
-3.0 m	kg	*18 350	*18 350	*14 900	11 350	*11 300	7500			*8900	5950	7180
-10.0 ft	lb	*41,800	*41,800	*32,250	24,400	*24,400	16,150			*19,600	13,200	290
-4.5 m	kg	*15 700	*15 700	*11 900	11 650					*8650	8100	5830
-15.0 ft	lb			*25,350	25,050					*19,000	18,150	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












330F L Hydraulic Excavator Lift Charts

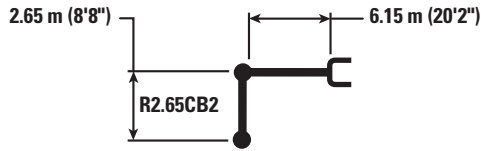Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Regions: EU, ANZ

Long Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*19,200	18,700			*7350	7350	6670
6.0 m 20.0 ft	kg lb					*8950	8650	*8400	6100	*6900	5800	7700
						*19,500	18,550	*15,750	13,000	*15,250	12,950	300
4.5 m 15.0 ft	kg lb			*12 300	*12 300	*10 050	8350	*9000	6000	*6850	5100	8340
				*26,400	*26,400	*21,750	18,000	*19,650	12,850	*15,050	11,250	330
3.0 m 10.0 ft	kg lb			*15 500	12 050	*11 500	8000	8950	5850	*7000	4700	8670
				*33,350	26,000	*24,900	17,250	19,300	12,550	*15,400	10,400	340
1.5 m 5.0 ft	kg lb			*16 550	11 450	12 300	7700	8800	5650	7050	4600	8720
				*38,500	24,700	26,450	16,550	18,900	12,200	15,550	10,100	350
0 m 0 ft	kg lb			*17 550	11 250	12 050	7500	8650	5550	7250	4700	8510
				*40,150	24,200	25,950	16,150	18,650	11,950	15,950	10,350	340
-1.5 m -5.0 ft	kg lb	*10 350	*10 350	*18 000	11 250	12 000	7450	8650	5550	7900	5100	8020
		*23,650	*23,650	*39,100	24,150	25,800	16,000	18,600	11,900	17,400	11,200	320
-3.0 m -10.0 ft	kg lb	*19 400	*19 400	*16 450	11 350	12 050	7500			9300	5950	7180
		*44,200	*44,200	*35,600	24,400	25,950	16,150			20,650	13,200	290
-4.5 m -15.0 ft	kg lb	*17 350	*17 350	*13 150	11 650					*9600	8100	5830
				*28,050	25,050					*21,050	18,150	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Regions: ADSD-N, EU, ANZ, JAPAN

Long Undercarriage

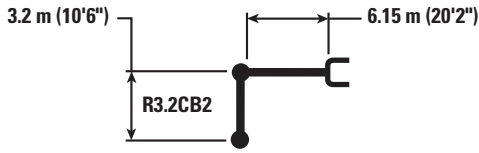

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5150 *11,400	*5150 *11,400	7280 290
6.0 m 20.0 ft	kg lb									*7150 *15,300	5950 12,800			*4900 *10,800	*4900 *10,800	8230 330
4.5 m 15.0 ft	kg lb							*8400 *18,150	8200 17,600	*7600 *16,500	5850 12,550			*4850 *10,700	4500 9,950	8830 350
3.0 m 10.0 ft	kg lb					*12 900 *27,700	11 900 25,600	*9750 *21,100	7800 16,800	*8250 *17,950	5650 12,150	*5950 4300		*5000 *11,000	4200 9,200	9140 360
1.5 m 5.0 ft	kg lb					*15 350 *33,100	11 150 24,050	*11 100 *24,000	7450 16,050	8500 18,250	5450 11,750	6500 *12,550	4200 9,000	*5300 *11,650	4100 8,950	9190 370
0 m 0 ft	kg lb					*16 500 *35,700	10 800 23,250	11 650 25,000	7200 15,500	8350 17,900	5300 11,400			*5850 *12,800	4150 9,100	8990 360
-1.5 m -5.0 ft	kg lb	*6350 *14,200	*6350 *14,200	*10 050 *22,750	*10 050 *22,750	*16 500 *35,750	10 700 23,050	11 500 24,700	7100 15,250	8250 17,750	5250 11,300			*6750 *14,850	4450 9,750	8530 340
-3.0 m -10.0 ft	kg lb	*11 450 *25,700	*11 450 *25,700	*16 200 *36,800	*16 200 *36,800	*15 500 *33,500	10 800 23,200	11 550 24,800	7100 15,300	8300 17,900	5300 11,400			7950 17,600	5100 11,250	7740 310
-4.5 m -15.0 ft	kg lb			*17 900 *38,550	*17 900 *38,550	*13 150 *28,200	11 000 23,700	*9750 *20,600	7300 15,750					*8550 *18,750	6550 14,650	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Regions: ADSD-N, EU, ANZ, JAPAN

Long Undercarriage

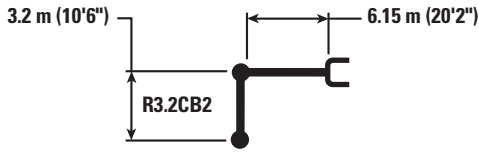

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5600 *12,450	*5600 *12,450	7280 290
6.0 m 20.0 ft	kg lb									*7900 *16,700	5950 12,800			*5350 *11,800	5100 11,350	8230 330
4.5 m 15.0 ft	kg lb							*9200 *20,000	8200 17,600	*8350 *18,250	5850 12,550			*5350 *11,700	4500 9,950	8830 350
3.0 m 10.0 ft	kg lb					*14 200 *30,500	11 900 25,600	*10 750 *23,250	7800 16,800	8700 18,700	5650 12,150	*6500 4300		*5450 *12,000	4200 9,200	9140 360
1.5 m 5.0 ft	kg lb					*16 900 *36,500	11 150 24,050	11 900 25,600	7450 16,050	8500 18,250	5450 11,750	6500 *13,700	4200 9,000	*5800 *12,750	4100 8,950	9190 370
0 m 0 ft	kg lb					*18 200 *39,400	10 800 23,250	11 650 25,000	7200 15,500	8350 17,900	5300 11,400			*6400 *14,050	4150 9,100	8990 360
-1.5 m -5.0 ft	kg lb	*6750 *15,100	*6750 *15,100	*10 600 *24,100	*10 600 *24,100	*18 200 *39,400	10 700 23,050	11 500 24,700	7100 15,250	8250 17,750	5250 11,300			6900 15,200	4450 9,750	8530 340
-3.0 m -10.0 ft	kg lb	*12 150 *27,200	*12 150 *27,200	*17 150 *38,950	*17 150 *38,950	*17 050 *36,950	10 800 23,200	11 550 24,800	7100 15,300	8300 17,900	5300 11,400			7950 17,600	5100 11,250	7740 310
-4.5 m -15.0 ft	kg lb			*19 800 *42,600	*19 800 *42,600	*14 550 *31,200	11 000 23,700	*10 750 *22,800	7300 15,750					*9450 *20,800	6550 14,650	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: EU

Long Undercarriage

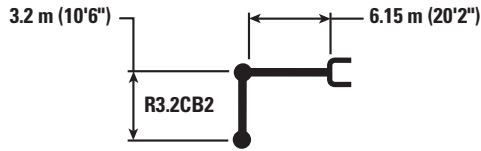

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5150 *11,400	*5150 *11,400	7280 290
6.0 m 20.0 ft	kg lb									*7150 *15,300	6000 12,900			*4900 *10,800	*4900 *10,800	8230 330
4.5 m 15.0 ft	kg lb							*8400 *18,150	8250 17,800	*7600 *16,500	5900 12,650			*4850 *10,700	4550 10,050	8830 350
3.0 m 10.0 ft	kg lb					*12 900 *27,700	12 000 25,850	*9750 *21,100	7900 16,950	*8250 *17,950	5700 12,250	*5950 4350		*5000 *11,000	4250 9,300	9140 360
1.5 m 5.0 ft	kg lb					*15 350 *33,100	11 300 24,300	*11 100 *24,000	7500 16,200	8600 18,450	5500 11,850	6550 *12,550	4250 9,100	*5300 *11,650	4100 9,050	9190 370
0 m 0 ft	kg lb					*16 500 *35,700	10 900 23,500	11 750 25,250	7250 15,650	8400 18,100	5350 11,550			*5850 *12,800	4200 9,200	8990 360
-1.5 m -5.0 ft	kg lb	*6350 *14,200	*6350 *14,200	*10 050 *22,750	*10 050 *22,750	*16 500 *35,750	10 800 23,250	11 650 25,000	7150 15,400	8350 17,950	5300 11,400			*6750 *14,850	4500 9,900	8530 340
-3.0 m -10.0 ft	kg lb	*11 450 *25,700	*11 450 *25,700	*16 200 *36,800	*16 200 *36,800	*15 500 *33,500	10 900 23,450	*11 650 25,050	7200 15,450	8400 18,100	5350 11,550			8050 17,800	5150 11,350	7740 310
-4.5 m -15.0 ft	kg lb			*17 900 *38,550	*17 900 *38,550	*13 150 *28,200	11 150 23,950	*9750 *20,600	7350 15,900					*8550 *18,750	6600 14,800	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: EU

Long Undercarriage

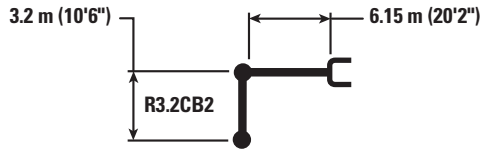

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5600 *12,450	*5600 *12,450	7280 290
6.0 m 20.0 ft	kg lb									*7900 *16,700	6000 12,900			*5350 *11,800	5150 11,450	8230 330
4.5 m 15.0 ft	kg lb							*9200 *20,000	8250 17,800	*8350 *18,250	5900 12,650			*5350 *11,700	4550 10,050	8830 350
3.0 m 10.0 ft	kg lb					*14 200 *30,500	12 000 25,850	*10 750 *23,250	7900 16,950	8800 18,900	5700 12,250	*6500 4350		*5450 *12,000	4250 9,300	9140 360
1.5 m 5.0 ft	kg lb					*16 900 *36,500	11 300 24,300	12 050 25,900	7500 16,200	8600 18,450	5500 11,850	6550 *13,700	4250 9,100	*5800 *12,750	4100 9,050	9190 370
0 m 0 ft	kg lb					*18 200 *39,400	10 900 23,500	11 750 25,250	7250 15,650	8400 18,100	5350 11,550			*6400 *14,050	4200 9,200	8990 360
-1.5 m -5.0 ft	kg lb	*6750 *15,100	*6750 *15,100	*10 600 *24,100	*10 600 *24,100	*18 200 *39,400	10 800 23,250	11 650 25,000	7150 15,400	8350 17,950	5300 11,400			7000 15,400	4500 9,900	8530 340
-3.0 m -10.0 ft	kg lb	*12 150 *27,200	*12 150 *27,200	*17 150 *38,950	*17 150 *38,950	*17 050 *36,950	10 900 23,450	11 650 25,050	7200 15,450	8400 18,100	5350 11,550			8050 17,800	5150 11,350	7740 310
-4.5 m -15.0 ft	kg lb			*19 800 *42,600	*19 800 *42,600	*14 550 *31,200	11 150 23,950	*10 750 *22,800	7350 15,900					*9450 *20,800	6600 14,800	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Regions: ADSD-N, EU, ANZ, JAPAN

Long Undercarriage

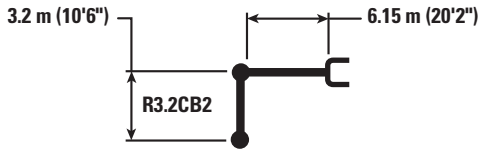

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5150 *11,400	*5150 *11,400	7280 290
6.0 m 20.0 ft	kg lb									*7150 *15,300	6100 13,150			*4900 *10,800	*4900 *10,800	8230 330
4.5 m 15.0 ft	kg lb							*8400 *18,150	*8400 18,100	*7600 *16,500	6000 12,900			*4850 *10,700	4650 10,250	8830 350
3.0 m 10.0 ft	kg lb					*12 900 *27,700	12 200 26,300	*9750 *21,100	8000 17,250	*8250 *17,950	5800 12,500	*5950 4400		*5000 *11,000	4300 9,500	9140 360
1.5 m 5.0 ft	kg lb					*15 350 *33,100	11 500 24,750	*11 100 *24,000	7650 16,500	8750 18,800	5600 12,100	6700 *12,550	4350 9,300	*5300 *11,650	4200 9,250	9190 370
0 m 0 ft	kg lb					*16 500 *35,700	11 150 23,950	*11 950 25,750	7400 15,950	8600 18,450	5450 11,750			*5850 *12,800	4300 9,400	8990 360
-1.5 m -5.0 ft	kg lb	*6350 *14,200	*6350 *14,200	*10 050 *22,750	*10 050 *22,750	*16 500 *35,750	11 050 23,700	11 850 25,500	7300 15,700	8500 18,300	5400 11,650			*6750 *14,850	4600 10,100	8530 340
-3.0 m -10.0 ft	kg lb	*11 450 *25,700	*11 450 *25,700	*16 200 *36,800	*16 200 *36,800	*15 500 *33,500	11 100 23,900	*11 650 *25,150	7300 15,750	8550 18,450	5450 11,750			8200 18,200	5250 11,600	7740 310
-4.5 m -15.0 ft	kg lb			*17 900 *38,550	*17 900 *38,550	*13 150 *28,200	11 350 24,400	*9750 *20,600	7500 16,200					*8550 *18,750	6750 15,100	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Regions: ADSD-N, EU, ANZ, JAPAN

Long Undercarriage

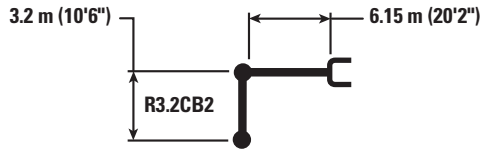

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5600 *12,450	*5600 *12,450	7280 290
6.0 m 20.0 ft	kg lb									*7900 *16,700	6100 13,150			*5350 *11,800	5250 11,650	8230 330
4.5 m 15.0 ft	kg lb							*9200 *20,000	8400 18,100	*8350 *18,250	6000 12,900			*5350 *11,700	4650 10,250	8830 350
3.0 m 10.0 ft	kg lb					*14 200 *30,500	12 200 26,300	*10 750 *23,250	8000 17,250	8950 19,250	5800 12,500	*6500 4400		*5450 *12,000	4300 9,500	9140 360
1.5 m 5.0 ft	kg lb					*16 900 *36,500	11 500 24,750	*12 250 *26,400	7650 16,500	8750 18,800	5600 12,100	6700 *13,700	4350 9,300	*5800 *12,750	4200 9,250	9190 370
0 m 0 ft	kg lb					*18 200 *39,400	11 150 23,950	12 000 *25,750	7400 15,950	8600 18,450	5450 11,750			*6400 *14,050	4300 9,400	8990 360
-1.5 m -5.0 ft	kg lb	*6750 *15,100	*6750 *15,100	*10 600 *24,100	*10 600 *24,100	*18 200 *39,400	11 050 23,700	11 850 *25,500	7300 15,700	8500 18,300	5400 11,650			7150 15,700	4600 10,100	8530 340
-3.0 m -10.0 ft	kg lb	*12 150 *27,200	*12 150 *27,200	*17 150 *38,950	*17 150 *38,950	*17 050 *36,950	11 100 23,900	11 900 *25,550	7300 15,750	8550 18,450	5450 11,750			8200 18,200	5250 11,600	7740 310
-4.5 m -15.0 ft	kg lb			*19 800 *42,600	*19 800 *42,600	*14 550 *31,200	11 350 24,400	*10 750 *22,800	7500 16,200					*9450 *20,800	6750 15,100	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

HD Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Regions: JAPAN, S. KOREA

Long Undercarriage

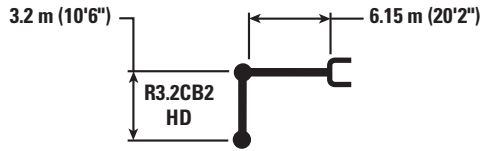

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5050 *11,250	*5050 *11,250	7280 290
6.0 m 20.0 ft	kg lb									*6950 *15,150	5800 12,450			*4850 *10,650	*4850 *10,650	8230 330
4.5 m 15.0 ft	kg lb							*8150 *17,700	8050 17,300	*7350 *16,050	5650 12,150			*4800 *10,550	4350 9,550	8830 350
3.0 m 10.0 ft	kg lb					*12 550 *27,000	11 650 25,050	*9500 *20,550	7600 16,350	*8050 *17,450	5450 11,700	*5900 4100		*4900 *10,800	4000 8,800	9140 360
1.5 m 5.0 ft	kg lb					*14 950 *32,300	10 800 23,300	*10 800 *23,300	7200 15,500	8300 17,800	5250 11,250	6300 *12,350	4000 8,600	*5200 *11,450	3900 8,550	9190 370
0 m 0 ft	kg lb					*16 100 *34,800	10 450 22,450	11 350 24,400	6900 14,900	8100 17,450	5100 10,950			*5750 *12,650	3950 8,700	8990 360
-1.5 m -5.0 ft	kg lb	*6300 *14,050	*6300 *14,050	*9950 *22,600	*9950 *22,600	*16 050 *34,800	10 350 22,200	11 250 24,100	6800 14,650	8050 17,300	5000 10,800			*6650 *14,650	4250 9,350	8530 340
-3.0 m -10.0 ft	kg lb	*11 400 *25,550	*11 400 *25,550	*16 150 *36,650	*16 150 *36,650	*15 050 *32,600	10 400 22,400	11 250 24,200	6850 14,700	8100 17,450	5050 10,950			7750 17,200	4900 10,800	7740 310
-4.5 m -15.0 ft	kg lb			*17 400 *37,450	*17 400 *37,450	*12 800 *27,400	10 700 23,000	*9450 *19,950	7050 15,200					*8250 *18,150	6300 14,150	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

HD Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: S. KOREA

Long Undercarriage

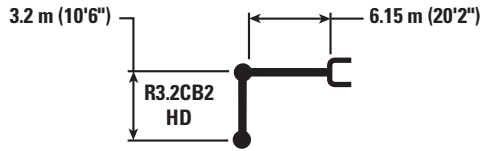

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5550 *12,300	*5550 *12,300	7280 290
6.0 m 20.0 ft	kg lb									*7700 *16,550	5800 12,450			*5300 *11,650	4950 11,000	8230 330
4.5 m 15.0 ft	kg lb							*9000 *19,500	8050 17,300	*8150 *17,750	5650 12,150			*5250 *11,550	4350 9,550	8830 350
3.0 m 10.0 ft	kg lb					*13 850 *29,800	11 650 25,050	*10 500 *22,700	7600 16,350	8500 18,300	5450 11,700	6400 4100		*5400 *11,850	4000 8,800	9140 360
1.5 m 5.0 ft	kg lb					*16 550 *35,650	10 800 23,300	11 700 25,100	7200 15,500	8300 17,800	5250 11,250	6300 *13,550	4000 8,600	*5700 *12,550	3900 8,550	9190 370
0 m 0 ft	kg lb					*17 800 *38,450	10 450 22,450	11 350 24,400	6900 14,900	8100 17,450	5100 10,950			6250 13,750	3950 8,700	8990 360
-1.5 m -5.0 ft	kg lb	*6650 *14,950	*6650 *14,950	*10 550 *23,950	*10 550 *23,950	*17 750 *38,500	10 350 22,200	11 250 24,100	6800 14,650	8050 17,300	5000 10,800			6700 14,800	4250 9,350	8530 340
-3.0 m -10.0 ft	kg lb	*12 050 *27,050	*12 050 *27,050	*17 100 *38,850	*17 100 *38,850	*16 650 *36,050	10 400 22,400	11 250 24,200	6850 14,700	8100 17,450	5050 10,950			7750 17,200	4900 10,800	7740 310
-4.5 m -15.0 ft	kg lb			*19 300 *41,500	*19 300 *41,500	*14 150 *30,350	10 700 23,000	*10 450 *22,150	7050 15,200					*9150 *20,150	6300 14,150	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

HD Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: JAPAN

Long Undercarriage

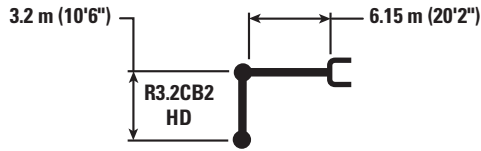

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5050 *11,250	*5050 *11,250	7280 290
6.0 m 20.0 ft	kg lb									*6950 *15,150	5950 12,800			*4850 *10,650	*4850 *10,650	8230 330
4.5 m 15.0 ft	kg lb							*8150 *17,700	*8150 *17,700	*7350 *16,050	5850 12,500			*4800 *10,550	4450 9,850	8830 350
3.0 m 10.0 ft	kg lb					*12 550 *27,000	11 950 25,750	*9500 *20,550	7800 16,850	*8050 *17,450	5600 12,100	*5900 4250		*4900 *10,800	4150 9,100	9140 360
1.5 m 5.0 ft	kg lb					*14 950 *32,300	11 150 24,000	*10 800 *23,300	7400 15,950	8550 18,400	5400 11,650	6500 *12,350	4150 8,900	*5200 *11,450	4000 8,850	9190 370
0 m 0 ft	kg lb					*16 100 *34,800	10 750 23,100	*11 650 *25,200	7150 15,350	8400 18,000	5250 11,300			*5750 *12,650	4100 9,000	8990 360
-1.5 m -5.0 ft	kg lb	*6300 *14,050	*6300 *14,050	*9950 *22,600	*9950 *22,600	*16 050 *34,800	10 650 22,900	11 600 24,900	7000 15,100	8300 17,850	5200 11,150			*6650 *14,650	4400 9,650	8530 340
-3.0 m -10.0 ft	kg lb	*11 400 *25,550	*11 400 *25,550	*16 150 *36,650	*16 150 *36,650	*15 050 *32,600	10 750 23,100	*11 300 *24,400	7050 15,150	8350 18,000	5250 11,300			8000 17,750	5050 11,150	7740 310
-4.5 m -15.0 ft	kg lb			*17 400 *37,450	*17 400 *37,450	*12 800 *27,400	11 000 23,700	*9450 *19,950	7250 15,650					*8250 *18,150	6500 14,600	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

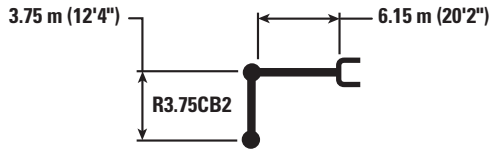

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb									*5450 *10,900	*5450 *10,900			*4350 *9,550	*4350 *9,550	7890 310
6.0 m 20.0 ft	kg lb									*6450 *14,200	6000 12,850			*4150 *9,150	*4150 *9,150	8780 350
4.5 m 15.0 ft	kg lb							*16,400	*16,400	*6950 *15,200	5850 12,500	*5450 *10,800	4350 9,300	*4150 *9,050	4050 9,000	9340 370
3.0 m 10.0 ft	kg lb					*11 600 *24,950	*11 600 *24,950	*9000 *19,500	7850 16,850	*7700 *16,800	5600 12,050	6550 *13,800	4250 9,100	*4250 *9,300	3800 8,350	9640 380
1.5 m 5.0 ft	kg lb					*14 350 *30,950	11 200 24,150	*10 450 *22,600	7400 15,950	8450 18,150	5400 11,600	6400 13,800	4150 8,850	*4500 *9,850	3700 8,100	9690 390
0 m 0 ft	kg lb			*6150 *14,000	*6150 *14,000	*16 000 *34,600	10 750 23,100	*11 550 24,850	7100 15,300	8250 17,700	5200 11,200	6300 13,550	4050 8,700	*4900 *10,750	3750 8,250	9500 380
-1.5 m -5.0 ft	kg lb	*6000 *13,400	*6000 *13,400	*9650 *21,900	*9650 *21,900	*16 400 *35,550	10 550 22,650	11 400 24,450	6950 14,950	8150 17,500	5100 11,000	*6100 4000		*5600 *12,350	3950 8,750	9060 360
-3.0 m -10.0 ft	kg lb	*10 050 *22,500	*10 050 *22,500	*14 450 *32,800	*14 450 *32,800	*15 800 *34,250	10 550 22,650	11 350 24,400	6950 14,900	8100 17,500	5100 11,000			*6850 *15,150	4450 9,900	8320 330
-4.5 m -15.0 ft	kg lb	*14 950	*14 950	*19 750 *42,600	*19 750 *42,600	*14 050 *30,250	10 700 23,050	*10 500 *22,500	7050 15,200					*8100 *17,900	5550 12,350	7200 280
-6.0 m -20.0 ft	kg lb					*10 200 *21,300	*10 200 *21,300							*7950 *19,200	*7950 *19,200	5460 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: ADS-D-N

Long Undercarriage

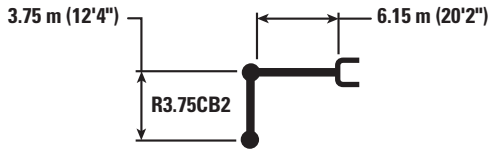

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb									*5950 *11,950	*5950 *11,950			*4750 *10,500	*4750 *10,500	7890 310
6.0 m 20.0 ft	kg lb									*7150 *15,550	6000 12,850			*4550 *10,050	*4550 *10,050	8780 350
4.5 m 15.0 ft	kg lb							*18,100	17,750	*7700 *16,800	5850 12,500	*6000 *11,850	4350 9,300	*4550 *9,950	4050 9,000	9340 370
3.0 m 10.0 ft	kg lb					*12 800 *27,500	12 050 26,000	*9950 *21,500	7850 16,850	*8550 *18,550	5600 12,050	6550 14,050	4250 9,100	*4650 *10,200	3800 8,350	9640 380
1.5 m 5.0 ft	kg lb					*15 850 *34,150	11 200 24,150	*11 550 *25,000	7400 15,950	8450 18,150	5400 11,600	6400 13,800	4150 8,850	*4900 *10,800	3700 8,100	9690 390
0 m 0 ft	kg lb			*6500 *14,900	*6500 *14,900	*17 650 *38,150	10 750 23,100	11 550 24,850	7100 15,300	8250 17,700	5200 11,200	6300 13,550	4050 8,700	*5350 *11,800	3750 8,250	9500 380
-1.5 m -5.0 ft	kg lb	*6400 *14,250	*6400 *14,250	*10 250 *23,200	*10 250 *23,200	*18 100 *39,250	10 550 22,650	11 400 24,450	6950 14,950	8150 17,500	5100 11,000	6300 13,550	4000	*6150 *13,550	3950 8,750	9060 360
-3.0 m -10.0 ft	kg lb	*10 650 *23,850	*10 650 *23,850	*15 300 *34,750	*15 300 *34,750	*17 450 *37,800	10 550 22,650	11 350 24,400	6950 14,900	8100 17,500	5100 11,000			7050 15,550	4450 9,900	8320 330
-4.5 m -15.0 ft	kg lb	*15 850 *34,150	*15 850 *34,150	*21 850 *47,050	21 500 46,000	*15 550 *33,450	10 700 23,050	11 500 24,700	7050 15,200					8750 19,600	5550 12,350	7200 280
-6.0 m -20.0 ft	kg lb					*11 350 *23,650	11 150 *23,650							*8850 *21,350	8450 21,200	5460 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

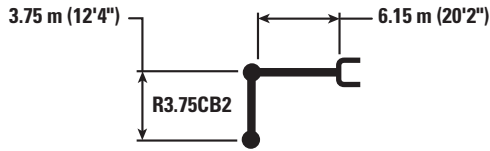

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb									*5450 *10,900	*5450 *10,900			*4350 *9,550	*4350 *9,550	7890 310
6.0 m 20.0 ft	kg lb									*6450 *14,200	6150 13,200			*4150 *9,150	*4150 *9,150	8780 350
4.5 m 15.0 ft	kg lb							*16,400 *16,400		*6950 *15,200	6000 12,850	*5450 *10,800	4450 9,550	*4150 *9,050	*4150 *9,050	9340 370
3.0 m 10.0 ft	kg lb					*11 600 *24,950	*11 600 *24,950	*9000 *19,500	8050 17,300	*7700 *16,800	5800 12,400	*6750 *13,800	4350 9,400	*4250 *9,300	3900 8,600	9640 380
1.5 m 5.0 ft	kg lb					*14 350 *30,950	11 550 24,850	*10 450 *22,600	7650 16,450	*8500 *18,500	5550 11,950	6600 14,200	4250 9,150	*4500 *9,850	3800 8,400	9690 390
0 m 0 ft	kg lb			*6150 *14,000	*6150 *14,000	*16 000 *34,600	11 050 23,750	*11 550 *24,950	7350 15,800	8500 18,300	5400 11,550	6500 14,000	4150 8,950	*4900 *10,750	3850 8,500	9500 380
-1.5 m -5.0 ft	kg lb	*6000 *13,400	*6000 *13,400	*9650 *21,900	*9650 *21,900	*16 400 *35,550	10 850 23,350	11 750 25,200	7150 15,450	8400 18,050	5300 11,350	*6100 4150		*5600 *12,350	4100 9,050	9060 360
-3.0 m -10.0 ft	kg lb	*10 050 *22,500	*10 050 *22,500	*14 450 *32,800	*14 450 *32,800	*15 800 *34,250	10 850 23,350	11 700 25,150	7150 15,400	8400 18,050	5250 11,350			*6850 *15,150	4600 10,200	8320 330
-4.5 m -15.0 ft	kg lb	*14 950 *33,000	*14 950 *33,000	*19 750 *42,600	*19 750 *42,600	*14 050 *30,250	11 050 23,750	*10 500 *22,500	7250 15,650					*8100 *17,900	5700 12,750	7200 280
-6.0 m -20.0 ft	kg lb					*10 200 *21,300	*10 200 *21,300							*7950 *19,200	*7950 *19,200	5460 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: ADSD-N

Long Undercarriage

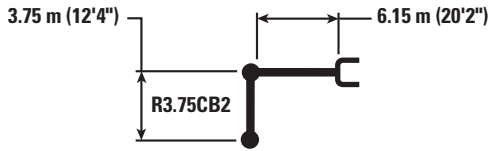

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb									*5950 *11,950	*5950 *11,950			*4750 *10,500	*4750 *10,500	7890 310
6.0 m 20.0 ft	kg lb									*7150 *15,550	6150 13,200			*4550 *10,050	*4550 *10,050	8780 350
4.5 m 15.0 ft	kg lb							*18,100 *18,100		*7700 *16,800	6000 12,850	*6000 *11,850	4450 9,550	*4550 *9,950	4200 9,250	9340 370
3.0 m 10.0 ft	kg lb					*12 800 *27,500	12 400 26,700	*9950 *21,500	8050 17,300	*8550 *18,550	5800 12,400	6750 14,450	4350 9,400	*4650 *10,200	3900 8,600	9640 380
1.5 m 5.0 ft	kg lb					*15 850 *34,150	11 550 24,850	*11 550 *25,000	7650 16,450	8700 18,700	5550 11,950	6600 14,200	4250 9,150	*4900 *10,800	3800 8,400	9690 390
0 m 0 ft	kg lb			*6500 *14,900	*6500 *14,900	*17 650 *38,150	11 050 23,750	11 900 25,600	7350 15,800	8500 18,300	5400 11,550	6500 14,000	4150 8,950	*5350 *11,800	3850 8,500	9500 380
-1.5 m -5.0 ft	kg lb	*6400 *14,250	*6400 *14,250	*10 250 *23,200	*10 250 *23,200	*18 100 *39,250	10 850 23,350	11 750 25,200	7150 15,450	8400 18,050	5300 11,350	6500 14,000	4150 8,950	*6150 *13,550	4100 9,050	9060 360
-3.0 m -10.0 ft	kg lb	*10 650 *23,850	*10 650 *23,850	*15 300 *34,750	*15 300 *34,750	*17 450 *37,800	10 850 23,350	11 700 25,150	7150 15,400	8400 18,050	5250 11,350			7250 16,050	4600 10,200	8320 330
-4.5 m -15.0 ft	kg lb	*15 850 *34,750	*15 850 *34,750	*21 850 *47,050	*21 850 *47,050	*15 550 *33,450	11 050 23,750	*11 650 *24,900	7250 15,650					*9000 *19,850	5700 12,750	7200 280
-6.0 m -20.0 ft	kg lb					*11 350 *23,650	*11 350 *23,650							*8850 *21,350	8700 *21,350	5460 200



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 6.75 mt (7.4 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

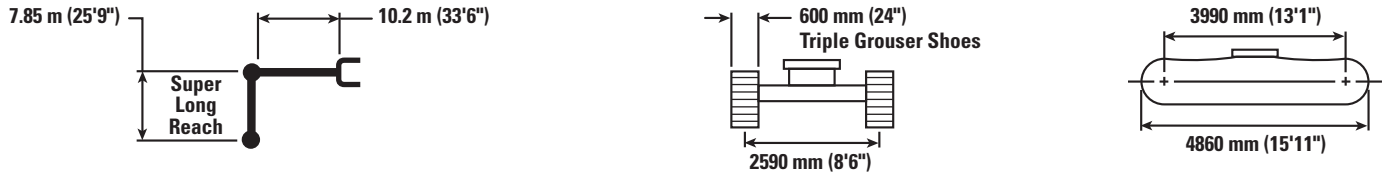

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12.0 m 40.0 ft	kg lb													*1350 *2,950	*1350 *2,950	14 030 550
10.5 m 35.0 ft	kg lb													*1300 *2,800	*1300 *2,800	15 000 590
9.0 m 30.0 ft	kg lb													*1250 *2,750	*1250 *2,750	15 770 620
7.5 m 25.0 ft	kg lb													*1250 *2,750	*1250 *2,750	16 370 650
6.0 m 20.0 ft	kg lb													*1250 *2,750	*1250 *2,750	16 810 660
4.5 m 15.0 ft	kg lb													*1300 *2,800	*1300 *2,800	17 110 680
3.0 m 10.0 ft	kg lb			*4150	*4150							*4150 *9,000	*4150 *9,000	*1350 *2,900	*1350 *2,900	17 270 680
1.5 m 5.0 ft	kg lb			*1550 *3,550	*1550 *3,550	*5200 *12,200	*5200 *12,200	*7400 *15,900	7350 *15,900	*5700 *12,350	5500 11,850	*4750 *10,300	4300 9,200	*1400 *3,000	*1400 *3,000	17 300 680
0 m 0 ft	kg lb			*1650 *3,750	*1650 *3,750	*3600 *8,250	*3600 *8,250	*8250 *18,450	6600 14,300	*6500 *14,100	5000 10,800	*5300 *11,500	3950 8,500	*1450 *3,150	*1450 *3,150	17 190 680
-1.5 m -5.0 ft	kg lb	*1650 *3,600	*1650 *3,600	*2150 *4,800	*2150 *4,800	*3550 *8,000	*3550 *8,000	*6500 *14,950	6150 13,250	*7150 *15,450	4650 10,000	*5800 *12,550	3700 7,950	*1550 *3,400	*1450 *3,150	16 960 670
-3.0 m -10.0 ft	kg lb	*2250 *4,950	*2250 *4,950	*2750 *6,100	*2750 *6,100	*3900 *8,750	*3900 *8,750	*6250 *14,250	5900 12,650	7500 16,150	4400 9,500	5850 12,600	3500 7,500	*1650 *3,650	*1450 *3,200	16 580 660
-4.5 m -15.0 ft	kg lb	*2850 *6,300	*2850 *6,300	*3350 *7,500	*3350 *7,500	*4450 *10,000	*4450 *10,000	*6550 *14,950	5750 12,400	7350 15,800	4300 9,200	5700 12,300	3400 7,250	*1850 *4,050	*1550 *3,350	16 050 630
-6.0 m -20.0 ft	kg lb	*3450 *7,700	*3450 *7,700	*4050 *9,050	*4050 *9,050	*5150 *11,650	*5150 *11,650	*7250 *16,500	5750 12,350	7300 15,700	4250 9,100	5650 12,150	3300 7,150	*2050 *4,600	*1650 *3,600	15 360 610
-7.5 m -25.0 ft	kg lb	*4150 *9,250	*4150 *9,250	*4800 *10,800	*4800 *10,800	*6000 *13,600	*6000 *13,600	*8250 *18,800	5800 12,500	7300 15,750	4250 9,150	5650 12,200	3350 7,150	*2400 *5,350	*1800 *4,000	14 480 570
-9.0 m -30.0 ft	kg lb	*4850 *10,900	*4850 *10,900	*5650 *12,750	*5650 *12,750	*7050 *15,950	*7050 *15,950	*9550 *20,550	5950 12,800	7400 15,950	4350 9,350	5700 12,350	3400 7,300	*2950 *6,600	*2050 *4,550	13 370 530
-10.5 m -35.0 ft	kg lb	*5650 *12,700	*5650 *12,700	*6650 *15,000	*6650 *15,000	*8350 *19,000	*8350 *19,000	*8800 *18,900	6150 13,300	*7150 *15,300	4500 9,700	5850 12,650	3500 7,550	*3900 *8,900	*2450 *5,550	11 970 470
-12.0 m -40.0 ft	kg lb			*7800 *17,700	*7800 *17,700	*9750 *20,650	*9750 *20,650	*7650 *16,250	6450 14,000	*6250 *13,150	4750 10,250	*5100 *10,650	3700 8,100	*4300 *9,550	*3200 *7,350	10 150 390
-13.5 m -45.0 ft	kg lb													*4850	*4850	7110



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.


(continued on next page)

330F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 6.75 mt (7.4 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

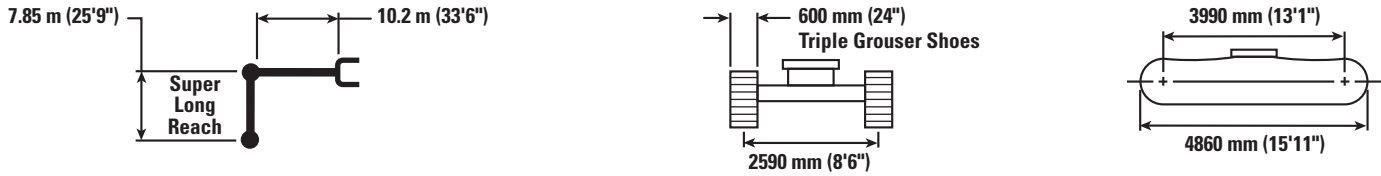

Reach		10.5 m/35.0 ft		12.0 m/40.0 ft		13.5 m/45.0 ft		15.0 m/50.0 ft		16.5 m/55.0 ft		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
12.0 m 40.0 ft	kg lb					*3,350	*3,350					*1350 *2,950	*1350 *2,950	14 030 550
10.5 m 35.0 ft	kg lb											*1300 *2,800	*1300 *2,800	15 000 590
9.0 m 30.0 ft	kg lb							*2050 *3,950	*2050 *3,950			*1250 *2,750	*1250 *2,750	15 770 620
7.5 m 25.0 ft	kg lb					*2650 *5,800	*2650 *5,800	*2550 *5,150	2250 4,750			*1250 *2,750	*1250 *2,750	16 370 650
6.0 m 20.0 ft	kg lb					*2800 *6,100	2700 5,700	*2750 *6,050	2200 4,600	*1700 *2,850	*1700 *2,850	*1250 *2,750	*1250 *2,750	16 810 660
4.5 m 15.0 ft	kg lb			*3100 *6,750	*3100 6,750	*3000 *6,500	2550 5,500	*2900 *6,300	2100 4,450	*2100 *3,850	1700 3,650	*1300 *2,800	*1300 *2,800	17 110 680
3.0 m 10.0 ft	kg lb	*3700 *8,050	3700 7,900	*3400 *7,400	3000 6,400	*3200 *6,950	2450 5,200	*3050 *6,600	2000 4,300	*2350 *4,500	1650 3,550	*1350 *2,900	*1350 *2,900	17 270 680
1.5 m 5.0 ft	kg lb	*4150 *9,150	3450 7,350	*3700 *8,050	2800 6,000	*3400 *7,400	2300 4,950	3100 6,700	1950 4,100	*2550 *4,800	1600 3,400	*1400 *3,000	*1400 *3,000	17 300 680
0 m 0 ft	kg lb	*4550 *9,850	3200 6,850	*4000 *8,700	2650 5,650	3550 7,650	2200 4,700	3050 6,500	1850 3,950	*2550 *4,800	1550 3,300	*1450 *3,150	*1450 *3,150	17 190 680
-1.5 m -5.0 ft	kg lb	*4900 10,550	3000 6,450	4100 8,750	2500 5,350	3450 7,400	2100 4,500	2950 6,350	1750 3,800	*2400 *4,150	1500 3,200	*1550 *3,400	1450 3,150	16 960 670
-3.0 m -10.0 ft	kg lb	4750 10,200	2850 6,150	3950 8,500	2400 5,100	3350 7,200	2000 4,300	2900 6,200	1700 3,650	*1850	1500	*1650 *3,650	1450 3,200	16 580 660
-4.5 m -15.0 ft	kg lb	4650 10,000	2750 5,950	3900 8,350	2300 4,950	3300 7,100	1950 4,200	2850 6,150	1700 3,600			*1850 *4,050	1550 3,350	16 050 630
-6.0 m -20.0 ft	kg lb	4600 9,850	2700 5,800	3850 8,250	2250 4,850	3300 7,050	1950 4,150	2850 *4,950	1700 3,600			*2050 *4,600	1650 3,600	15 360 610
-7.5 m -25.0 ft	kg lb	4600 9,850	2700 5,850	3850 8,250	2250 4,900	3300 7,100	1950 4,200					*2400 *5,350	1800 4,000	14 480 570
-9.0 m -30.0 ft	kg lb	4650 10,000	2750 5,950	3900 8,400	2350 5,000							*2950 *6,600	2050 4,550	13 370 530
-10.5 m -35.0 ft	kg lb	4750 10,300	2850 6,200									*3900 *8,900	2450 5,550	11 970 470
-12.0 m -40.0 ft	kg lb											*4300 *9,550	3200 7,350	10 150 390
-13.5 m -45.0 ft	kg lb											*4850	*4850	7110



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.


Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 6.75 mt (7.4 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

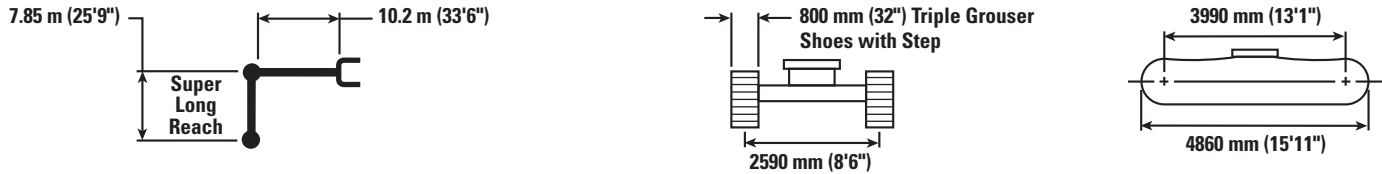

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12.0 m 40.0 ft	kg lb													*1350 *2,950	*1350 *2,950	14 030 550
10.5 m 35.0 ft	kg lb													*1300 *2,800	*1300 *2,800	15 000 590
9.0 m 30.0 ft	kg lb													*1250 *2,750	*1250 *2,750	15 770 620
7.5 m 25.0 ft	kg lb													*1250 *2,750	*1250 *2,750	16 370 650
6.0 m 20.0 ft	kg lb													*1250 *2,750	*1250 *2,750	16 810 660
4.5 m 15.0 ft	kg lb													*1300 *2,800	*1300 *2,800	17 110 680
3.0 m 10.0 ft	kg lb			*4150	*4150							*4150 *9,000	*4150 *9,000	*1350 *2,900	*1350 *2,900	17 270 680
1.5 m 5.0 ft	kg lb			*1550 *3,550	*1550 *3,550	*5200 *12,200	*5200 *12,200	*7400 *15,900	*7400 *15,900	*5700 *12,350	5650 12,200	*4750 *10,300	4400 9,500	*1400 *3,000	*1400 *3,000	17 300 680
0 m 0 ft	kg lb			*1650 *3,750	*1650 *3,750	*3600 *8,250	*3600 *8,250	*8250 *18,450	*8250 *18,450	*6500 *14,100	6850 14,750	*5300 *11,500	4100 8,800	*1450 *3,150	*1450 *3,150	17 190 680
-1.5 m -5.0 ft	kg lb	*1650 *3,600	*1650 *3,600	*2150 *4,800	*2150 *4,800	*3550 *8,000	*3550 *8,000	*6500 *14,950	6350 13,700	*7150 *15,450	4800 10,350	*5800 *12,550	3800 8,200	*1550 *3,400	1500 3,300	16 960 670
-3.0 m -10.0 ft	kg lb	*2250 *4,950	*2250 *4,950	*2750 *6,100	*2750 *6,100	*3900 *8,750	*3900 *8,750	*6250 *14,250	6100 13,150	*7600 *16,450	4600 9,850	6050 13,000	3650 7,800	*1650 *3,650	1550 3,350	16 580 660
-4.5 m -15.0 ft	kg lb	*2850 *6,300	*2850 *6,300	*3350 *7,500	*3350 *7,500	*4450 *10,000	*4450 *10,000	*6550 *14,950	6000 12,850	7600 16,400	4450 9,550	5900 12,750	3500 7,550	*1850 *4,050	1600 3,500	16 050 630
-6.0 m -20.0 ft	kg lb	*3450 *7,700	*3450 *7,700	*4050 *9,050	*4050 *9,050	*5150 *11,650	*5150 *11,650	*7250 *16,500	5950 12,850	7550 16,250	4400 9,450	5850 12,600	3450 7,450	*2050 *4,600	1700 3,750	15 360 610
-7.5 m -25.0 ft	kg lb	*4150 *9,250	*4150 *9,250	*4800 *10,800	*4800 *10,800	*6000 *13,600	*6000 *13,600	*8250 *18,800	6050 13,000	7600 16,300	4400 9,500	5850 12,600	3450 7,450	*2400 *5,350	1900 4,150	14 480 570
-9.0 m -30.0 ft	kg lb	*4850 *10,900	*4850 *10,900	*5650 *12,750	*5650 *12,750	*7050 *15,950	*7050 *15,950	*9550 *20,550	6150 13,300	*7650 *16,500	4500 9,700	5900 12,750	3500 7,550	*2950 *6,600	2150 4,750	13 370 530
-10.5 m -35.0 ft	kg lb	*5650 *12,700	*5650 *12,700	*6650 *15,000	*6650 *15,000	*8350 *19,000	*8350 *19,000	*8800 *18,900	6350 13,750	*7150 *15,300	4650 10,050	*5900 *12,650	3650 7,850	*3900 *8,900	2550 5,750	11 970 470
-12.0 m -40.0 ft	kg lb			*7800 *17,700	*7800 *17,700	*9750 *20,650	*9750 *20,650	*7650 *16,250	6700 14,500	*6250 *13,150	4900 10,600	*5100 *10,650	3850 8,350	*4300 *9,550	3300 7,600	10 150 390
-13.5 m -45.0 ft	kg lb													*4850	*4850	7110



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.




(continued on next page)

330F L Hydraulic Excavator Lift Charts

Super Long Reach Boom Lift Capacities – Counterweight: 6.75 mt (7.4 t) – without Bucket: Heavy Lift Off

Region: ADSD-N

Long Undercarriage

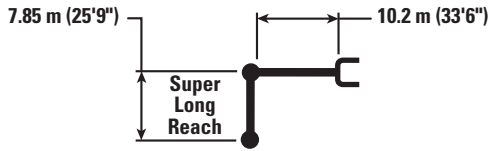

Reach		10.5 m/35.0 ft		12.0 m/40.0 ft		13.5 m/45.0 ft		15.0 m/50.0 ft		16.5 m/55.0 ft		mm in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm in
12.0 m 40.0 ft	kg lb					*3,350	*3,350					*1350 *2,950	*1350 *2,950	14 030 550
10.5 m 35.0 ft	kg lb											*1300 *2,800	*1300 *2,800	15 000 590
9.0 m 30.0 ft	kg lb							*2050 *3,950	*2050 *3,950			*1250 *2,750	*1250 *2,750	15 770 620
7.5 m 25.0 ft	kg lb					*2650 *5,800	*2650 *5,800	*2550 *5,150	2300 4,900			*1250 *2,750	*1250 *2,750	16 370 650
6.0 m 20.0 ft	kg lb					*2800 *6,100	2750 5,900	*2750 *6,050	2250 4,800	*1700 *2,850	*1700 *2,850	*1250 *2,750	*1250 *2,750	16 810 660
4.5 m 15.0 ft	kg lb			*3100 *6,750	*3100 *6,750	*3000 *6,500	2650 5,650	*2900 *6,300	2150 4,650	*2100 *3,850	1800 3,800	*1300 *2,800	*1300 *2,800	17 110 680
3.0 m 10.0 ft	kg lb	*3700 *8,050	*3700 *8,050	*3400 *7,400	3050 6,600	*3200 *6,950	2500 5,400	*3050 *6,600	2100 4,450	*2350 *4,500	1750 3,650	*1350 *2,900	*1350 *2,900	17 270 680
1.5 m 5.0 ft	kg lb	*4150 *9,150	3550 7,600	*3700 *8,050	2900 6,200	*3400 *7,400	2400 5,150	*3200 6,900	2000 4,250	*2550 *4,800	1700 3,550	*1400 *3,000	*1400 *3,000	17 300 680
0 m 0 ft	kg lb	*4550 *9,850	3300 7,100	*4000 *8,700	2750 5,850	*3650 7,900	2300 4,850	3150 6,750	1900 4,100	*2550 *4,800	1600 3,450	*1450 *3,150	*1450 *3,150	17 190 680
-1.5 m -5.0 ft	kg lb	*4900 *10,600	3100 6,700	4200 9,050	2600 5,550	3550 7,650	2200 4,650	3050 6,550	1850 3,950	*2400 *4,150	1600 3,350	*1550 *3,400	1500 3,300	16 960 670
-3.0 m -10.0 ft	kg lb	4900 10,550	2950 6,400	4100 8,800	2500 5,300	3500 7,500	2100 4,500	3000 6,450	1800 3,850	*1850	1550	*1650 *3,650	1550 3,350	16 580 660
-4.5 m -15.0 ft	kg lb	4800 10,350	2850 6,150	4000 8,650	2400 5,150	3450 7,350	2050 4,350	3000 6,400	1750 3,750			*1850 *4,050	1600 3,500	16 050 630
-6.0 m -20.0 ft	kg lb	4750 10,250	2800 6,050	4000 8,550	2350 5,050	3400 7,350	2000 4,300	3000 *4,950	1750 3,800			*2050 *4,600	1700 3,750	15 360 610
-7.5 m -25.0 ft	kg lb	4750 10,250	2800 6,050	4000 8,600	2350 5,100	3450 7,400	2050 4,400					*2400 *5,350	1900 4,150	14 480 570
-9.0 m -30.0 ft	kg lb	4800 10,350	2850 6,200	4050 8,750	2400 5,250							*2950 *6,600	2150 4,750	13 370 530
-10.5 m -35.0 ft	kg lb	4950 *10,550	3000 6,450									*3900 *8,900	2550 5,750	11 970 470
-12.0 m -40.0 ft	kg lb											*4300 *9,550	3300 7,600	10 150 390
-13.5 m -45.0 ft	kg lb											*4850	*4850	7110



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: EU

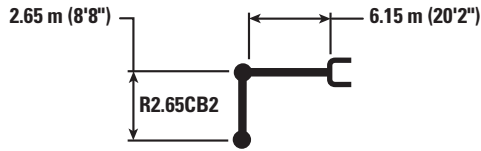Long Narrow Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*17,450	16,900			*6750	6600	6670
6.0 m 20.0 ft	kg lb					*8150	7800	*7700	5500	*6350	5250	7700
						*17,750	16,750	*14,450	11,750	*14,000	11,650	300
4.5 m 15.0 ft	kg lb			*11 200	*11 200	*9150	7500	*8150	5400	*6250	4550	8340
				*24,050	*24,050	*19,800	16,200	*17,800	11,600	*13,800	10,100	330
3.0 m 10.0 ft	kg lb			*14 100	10 700	*10 450	7150	8650	5250	*6400	4250	8670
				*30,300	23,100	*22,600	15,450	18,650	11,250	*14,100	9,300	340
1.5 m 5.0 ft	kg lb			*15 600	10 150	*11 650	6850	8500	5100	*6800	4100	8720
				*35,000	21,850	*25,150	14,800	18,250	10,950	*14,950	9,050	350
0 m 0 ft	kg lb			*16 600	9950	11 650	6700	8350	4950	7000	4200	8510
				*36,450	21,350	25,050	14,400	18,000	10,700	15,400	9,250	340
-1.5 m -5.0 ft	kg lb	*9750	*9750	*16 350	9900	11 600	6600	8350	4950	7600	4550	8020
		*22,300	*22,300	*35,450	21,300	24,900	14,250	17,950	10,650	16,800	10,000	320
-3.0 m -10.0 ft	kg lb	*18 350	*18 350	*14 900	10 050	*11 300	6700			*8900	5300	7180
		*41,800	*41,800	*32,250	21,550	*24,400	14,400			*19,600	11,800	290
-4.5 m -15.0 ft	kg lb	*15 700	*15 700	*11 900	10 300					*8650	7200	5830
				*25,350	22,200					*19,000	16,200	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.












330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: EU

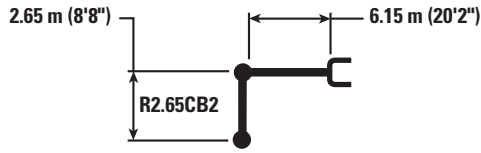Long Narrow Undercarriage



		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft				mm in
												
7.5 m 25.0 ft	kg lb					*19,200	16,900			*7350	6600	6670
6.0 m 20.0 ft	kg lb					*8950	7800	*8400	5500	*6900	5250	7700
						*19,500	16,750	*15,750	11,750	*15,250	11,650	300
4.5 m 15.0 ft	kg lb			*12 300	11 500	*10 050	7500	8850	5400	*6850	4550	8340
				*26,400	24,800	*21,750	16,200	19,000	11,600	*15,050	10,100	330
3.0 m 10.0 ft	kg lb			*15 500	10 700	*11 500	7150	8650	5250	6950	4250	8670
				*33,350	23,100	*24,900	15,450	18,650	11,250	15,350	9,300	340
1.5 m 5.0 ft	kg lb			*16 550	10 150	11 900	6850	8500	5100	6800	4100	8720
				*38,500	21,850	25,550	14,800	18,250	10,950	15,000	9,050	350
0 m 0 ft	kg lb			*17 550	9950	11 650	6700	8350	4950	7000	4200	8510
				*40,150	21,350	25,050	14,400	18,000	10,700	15,400	9,250	340
-1.5 m -5.0 ft	kg lb	*10 350	*10 350	*18 000	9900	11 600	6600	8350	4950	7600	4550	8020
		*23,650	*23,650	*39,100	21,300	24,900	14,250	17,950	10,650	16,800	10,000	320
-3.0 m -10.0 ft	kg lb	*19 400	*19 400	*16 450	10 050	11 650	6700			9000	5300	7180
		*44,200	41,850	*35,600	21,550	25,050	14,400			19,950	11,800	290
-4.5 m -15.0 ft	kg lb	*17 350	*17 350	*13 150	10 300					*9600	7200	5830
				*28,050	22,200					*21,050	16,200	230



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift Off

Region: EU

Long Narrow Undercarriage

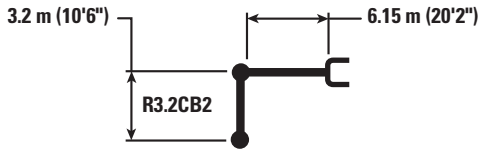

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5150 *11,400	*5150 *11,400	7280 290
6.0 m 20.0 ft	kg lb									*7150 *15,300	5500 11,850			*4900 *10,800	4700 10,500	8230 330
4.5 m 15.0 ft	kg lb							*8400 *18,150	7550 16,300	*7600 *16,500	5400 11,600			*4850 *10,700	4150 9,200	8830 350
3.0 m 10.0 ft	kg lb					*12 900 *27,700	10 850 23,400	*9750 *21,100	7200 15,500	*8250 *17,950	5200 11,200	*5950 3950		*5000 *11,000	3850 8,500	9140 360
1.5 m 5.0 ft	kg lb					*15 350 *33,100	10 150 21,900	*11 100 *24,000	6850 14,700	8450 18,150	5000 10,800	6450 *12,550	3850 8,300	*5300 *11,650	3750 8,250	9190 370
0 m 0 ft	kg lb					*16 500 *35,700	9800 21,100	11 600 24,900	6600 14,200	8300 17,850	4900 10,500			*5850 *12,800	3800 8,400	8990 360
-1.5 m -5.0 ft	kg lb	*6350 *14,200	*6350 *14,200	*10 050 *22,750	*10 050 *22,750	*16 500 *35,750	9700 20,900	11 450 24,600	6500 13,950	8200 17,650	4800 10,350			*6750 *14,850	4100 9,000	8530 340
-3.0 m -10.0 ft	kg lb	*11 450 *25,700	*11 450 *25,700	*16 200 *36,800	*16 200 *36,800	*15 500 *33,500	9800 21,050	11 500 24,650	6500 14,000	8250 17,800	4850 10,500			7900 17,550	4700 10,350	7740 310
-4.5 m -15.0 ft	kg lb			*17 900 *38,550	*17 900 *38,550	*13 150 *28,200	10 000 21,550	*9750 *20,600	6700 14,450					*8550 *18,750	6000 13,450	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.




Always refer to the appropriate Operation and Maintenance Manual for specific product information.

330F L Hydraulic Excavator Lift Charts

Reach Boom Lift Capacities – Counterweight: 5.8 mt (6.3 t) – without Bucket: Heavy Lift On

Region: EU

Long Narrow Undercarriage

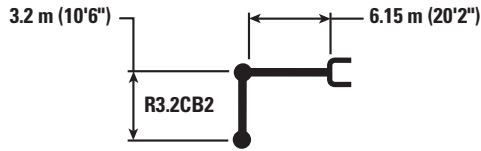

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		mm in		
7.5 m 25.0 ft	kg lb													*5600 *12,450	*5600 *12,450	7280 290
6.0 m 20.0 ft	kg lb									*7900 *16,700	5500 11,850			*5350 *11,800	4700 10,500	8230 330
4.5 m 15.0 ft	kg lb							*9200 *20,000	7550 16,300	*8350 *18,250	5400 11,600			*5350 *11,700	4150 9,200	8830 350
3.0 m 10.0 ft	kg lb					*14 200 *30,500	10 850 23,400	*10 750 *23,250	7200 15,500	8650 18,600	5200 11,200	*6500 3950		*5450 *12,000	3850 8,500	9140 360
1.5 m 5.0 ft	kg lb					*16 900 *36,500	10 150 21,900	11 850 25,500	6850 14,700	8450 18,150	5000 10,800	6450 *13,700	3850 8,300	*5800 *12,750	3750 8,250	9190 370
0 m 0 ft	kg lb					*18 200 *39,400	9800 21,100	11 600 24,900	6600 14,200	8300 17,850	4900 10,500			*6400 *14,050	3800 8,400	8990 360
-1.5 m -5.0 ft	kg lb	*6750 *15,100	*6750 *15,100	*10 600 *24,100	*10 600 *24,100	*18 200 *39,400	9700 20,900	11 450 24,600	6500 13,950	8200 17,650	4800 10,350			6850 15,150	4100 9,000	8530 340
-3.0 m -10.0 ft	kg lb	*12 150 *27,200	*12 150 *27,200	*17 150 *38,950	*17 150 *38,950	*17 050 *36,950	9800 21,050	11 500 24,650	6500 14,000	8250 17,800	4850 10,500			7900 17,550	4700 10,350	7740 310
-4.5 m -15.0 ft	kg lb			*19 800 *42,600	19 500 41,800	*14 550 *31,200	10 000 21,550	*10 750 *22,800	6700 14,450					*9450 *20,800	6000 13,450	6520 260



ISO 10567



*Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

For more complete information on Cat® products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEXQ1729 (03-2016)

© 2016 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

