

Cat® Portable Generators



RP3600 • RP5500 • RP6500 E • RP7500 E



Features

- Reliable power when you need it for home, work and play
- Easy to set up and operate
- Built tough with a heavy-duty frame, never-flat wheels and a hinged handle
- All-steel construction
- Engineered to run cool and quiet
- Enhanced safety features, including recessed sockets with waterproof covers
- Lithium Ion battery (RP6500 E and RP7500 E only)
- Electric/recoil start (RP6500 E and RP7500 E only)
- Automatically charges the battery when the set is running (RP6500 E and RP7500 E only)


Specifications

| Product Series | RP Generators | | | |
|--------------------------------------|-----------------|-----------------|-----------------|-----------------|
| Model Configuration | RP3600 | RP5500 | RP6500 E | RP7500 E |
| AC Rated Output Running (Watts) | 3600 | 5500 | 6500 | 7500 |
| AC Rated Output Starting (Watts) | 4500 | 6875 | 8125 | 9375 |
| AC Voltage (Volts) | 120 | 120/240 | 120/240 | 120/240 |
| AC Frequency (Hz) | 60 | 60 | 60 | 60 |
| Engine Displacement (cc) | 212 | 300 | 420 | 420 |
| Engine Type | OHV | OHV | OHV | OHV |
| Engine Speed (RPM) | 3600 | 3600 | 3600 | 3600 |
| Recommended Oil | SAE30/10W-30 | SAE30/10W-30 | SAE30/10W-30 | SAE30/10W-30 |
| Lubrication Method | Splash | Splash | Splash | Splash |
| Automatic Voltage Regulation (AVR) | Yes | Yes | Yes | Yes |
| Starting Method | Recoil | Recoil | Electric/Recoil | Electric/Recoil |
| Low-Oil Shutdown Method | Low Level | Low Level | Low Level | Low Level |
| Battery Type | N/A | N/A | Lithium Ion | Lithium Ion |
| Fuel Gauge | On Tank | On Tank | On Tank | On Tank |
| Fuel Tank Nominal Capacity Gal (ltr) | 4.5 (17) | 7.9 (30) | 7.9 (30) | 7.9 (30) |
| Run Time at 50% (hrs) | 13.5 | 15 | 12 | 11 |
| Handle Style | Double Folding | Double Folding | Double Folding | Double Folding |
| Wheel Type | Never-Flat | Never-Flat | Never-Flat | Never-Flat |
| Warranty | 3-Year Limited* | 3-Year Limited* | 3-Year Limited* | 3-Year Limited* |

*Longer-term 3-year limited warranty applies when registered within 30 days. Standard 2-year limited warranty applies if not registered within 30 days.

Dimensions and Weights

| Product Series | RP Generators | | | |
|--------------------------|---------------|-------------|-------------|-------------|
| Model Configuration | RP3600 | RP5500 | RP6500 E | RP7500 E |
| Length in (mm) | 28.4 (721) | 32.9 (835) | 32.9 (835) | 32.9 (835) |
| Width in (mm) | 25.2 (639) | 27.4 (696) | 27.4 (696) | 27.4 (696) |
| Height in (mm) | 23.0 (583) | 24.7 (628) | 24.7 (628) | 24.7 (628) |
| Extended Length in (mm) | 38.7 (982) | 45.2 (1148) | 45.2 (1148) | 45.2 (1148) |
| Carton Length in (mm) | 28.5 (725) | 33.9 (860) | 33.9 (860) | 33.9 (860) |
| Carton Width in (mm) | 18.9 (480) | 21.7 (550) | 21.7 (550) | 21.7 (550) |
| Carton Height in (mm) | 21.7 (550) | 23.4 (593) | 23.4 (593) | 23.4 (593) |
| Unit Weight lbs (kg) | 112.2 (51) | 163.0 (74) | 187.0 (85) | 192.5 (87) |
| Shipping Weight lbs (kg) | 123.2 (56) | 176.2 (80) | 200.2 (91) | 205.7 (93) |

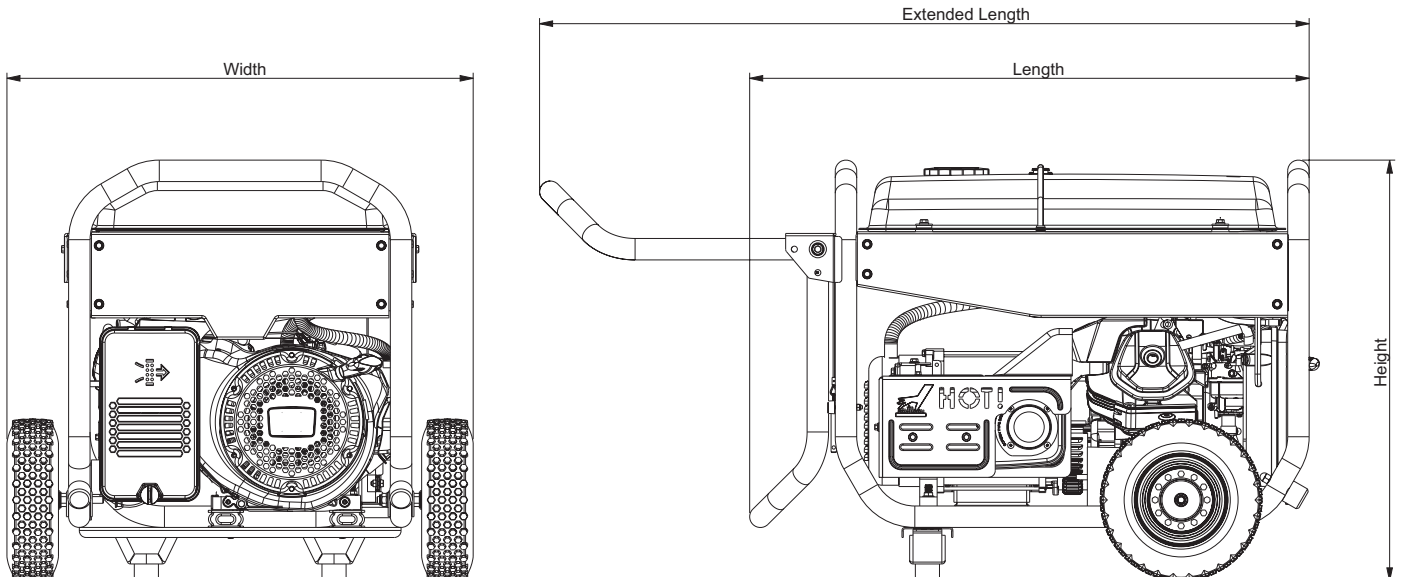

Dealer Contact Information