



The 3516E generator set has been developed for a wide range of applications including healthcare and datacenter installations. Backed by the worldwide network of Cat dealers ready to support your operation with technical support, service, parts, and warranty, Cat generator sets will provide the reliability and durability you expect.

Specifications

Generator Set Specifications	
Rating	2200 ekW (2750 kVA)
Voltage	11000 Volts
Frequency	50 Hz
Speed	1500 RPM

Generator Set Configurations	
Emissions/Fuel Strategy	Low Fuel Consumption
Duty Cycle	Prime

Engine Specifications		
Engine Model	3516E SCAC, V-16, 4-Stroke Water-Cooled Diesel	
Compression Ratio	14:1	
Exhaust Flange Size	254 mm	10.0 in
Aspiration	Turbo Aftercooled	
Governor Type	ADEM™ A5	
Fuel System	Electronic Unit Injection	
Bore	170 mm	6.69 in
Stroke	215 mm	8.46 in
Displacement	78.08 L	4764.73 in ³

Benefits And Features

Cat Generator Set Package

Cat generator set packages have been fully prototype tested, and certified torsional vibration analysis reports are available. The packages are designed to accept 100% load in one step, meet the NFPA 110 requirements for loading, and conform to the ISO 8828-5 steady state and transient response requirements.

Cat Diesel Engines

The four cycle Cat diesel engine combines consistent performance with excellent fuel economy and transient response that meets or exceeds ISO 8528-5. The engines have been designed and built for a wide range of applications are optimized for low fuel consumption. The engines feature a reliable, rugged, and durable design that has been field proven in thousands of applications worldwide from emergency standby installations.

Cooling System

The cooling system has been designed to operate in standard ambient temperatures up to 50°C (122°F), with an optional high ambient radiator. The factory installed cooling system has been designed and tested to ensure proper generator set cooling, and includes the radiator, fan, belts, and all guarding installed as standard. Contact your Cat Dealer for specific ambient and altitude capabilities.

Generators

The generators used on Cat packages have been designed and tested to work with the Cat engine. The generators are built with robust Class H insulation and provide industry leading motor starting capability. These generators feature permanent magnet alternators which provide 300% short circuit sustaining capability, superior power quality and better motor starting. Anti-condensation heaters provide protection from condensation when the generator set is not operational.

Cat EMCP Control Panel

The EMCP controller features the reliability and durability you have come to expect from your Cat equipment. EMCP4 is a scalable control platform designed to ensure reliable generator set operation, providing extensive information about power output and engine operation. EMCP4 systems can be further customized to meet your needs through programming and expansion modules.

World Wide Product Support

Cat Dealers provide extensive post sale support including maintenance and repair agreements. Cat dealers have over 1,800 dealer branch stores operating in 200 countries. The Caterpillar S•O•SSM program cost effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by-products.



Optional Equipment

Engine Options

- Air Cleaner: Single element air cleaners Dual element air cleaners
- Muffler: Industrial Grade (15 dBA) Residential Grade (25 dBA) Critical Grade (34 dBA)
- Starters: Standard
- Batteries: Oversize
- Battery Charger: 10A 20A 35A
- Jacket water heater: 220V single phase
- Vibration isolators: Seismic isolators (95% efficient) Spring type mounts (95% efficient)

Control System

- Controller: EMCP 4.2 EMCP 4.3 EMCP 4.4
- Local annunciator module: NFPA 110 Custom
- Remote annunciator module: NFPA 110 Custom
- Attachments: Expansion I/O module Remote monitoring software

Alternators

- Attachments: Alternator stator and bearing temperature monitoring & protection

Power Termination

- Power Termination: Circuit breaker (IEC compliant)

Extended Service Contract (ESC)


- Extended Service Contract (ESC): 2 Year 3 Year 4 Year 5 Year 10 Year

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

3516E
2200 ekW/ 2750 kVA/ 50 Hz/ 1500 rpm/ 11000 V/ 0.8 Power Factor

Rating Type: PRIME

Fuel Strategy: LOW FUEL CONSUMPTION

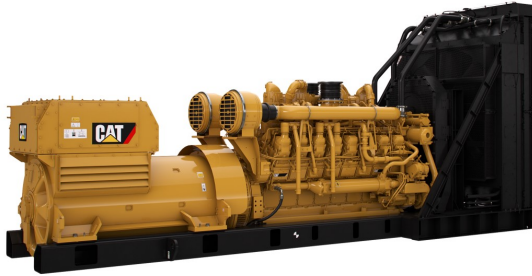

3516E
2200 ekW/ 2750 kVA
50 Hz/ 1500 rpm/ 11000 V

Image shown may not reflect actual configuration

Metric English

Package Performance

Genset Power Rating with Fan @ 0.8 Power Factor	2200 ekW	
Genset Power Rating	2750 kVA	
Aftercooler (Separate Circuit)	48.0 ° C	118.4 ° F

Fuel Consumption

100% Load with Fan	563.8 L/hr	148.9 gal/hr
75% Load with Fan	431.8 L/hr	114.1 gal/hr
50% Load with Fan	309.0 L/hr	81.6 gal/hr
25% Load with Fan	184.4 L/hr	48.7 gal/hr

Cooling System¹

Engine Coolant Capacity	233.0 L	61.6 gal
-------------------------	---------	----------

Inlet Air

Combustion Air Inlet Flow Rate	176.8 m ³ /min	6243.8 cfm
Max. Allowable Combustion Air Inlet Temp	59 ° C	138 ° F

Exhaust System

Exhaust Stack Gas Temperature	494.6 ° C	922.3 ° F
Exhaust Gas Flow Rate	469.4 m ³ /min	16576.4 cfm
Exhaust System Backpressure (Maximum Allowable)	6.7 kPa	27.0 in. water



3516E
2200 ekW/ 2750 kVA/ 50 Hz/ 1500 rpm/ 11000 V/ 0.8 Power Factor

Rating Type: PRIME

Fuel Strategy: LOW FUEL CONSUMPTION

Heat Rejection		
Heat Rejection to Jacket Water	959 kW	54562 Btu/min
Heat Rejection to Exhaust (Total)	2140 kW	121675 Btu/min
Heat Rejection to Aftercooler	N/A	N/A
Heat Rejection to Atmosphere from Engine	154 kW	8752 Btu/min
Heat Rejection to Atmosphere from Generator	85 kW	4811 Btu/min

Alternator²	
Motor Starting Capability @ 30% Voltage Dip	5215 skVA
Current	144 amps
Frame Size	B5653H4
Excitation	PM
Temperature Rise	105 ° C

Emissions (Nominal)³		
NOx	3767.2 mg/Nm ³	7.5 g/hp-hr
CO	354.9 mg/Nm ³	0.7 g/hp-hr
HC	18.5 mg/Nm ³	0.0 g/hp-hr
PM	8.1 mg/Nm ³	0.0 g/hp-hr

DEFINITIONS AND CONDITIONS

1. For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.
2. UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.
3. Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

3516E
2200 ekW/ 2750 kVA/ 50 Hz/ 1500 rpm/ 11000 V/ 0.8 Power Factor

Rating Type: PRIME

Fuel Strategy: LOW FUEL CONSUMPTION

Applicable Codes and Standards:

AS1359, CSA C22.2 No100-04, UL142,UL489, UL869, UL2200,
NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528,
NEMA MG1-22,NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

PRIME:Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated ekW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions

Fuel Rates are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

www.Cat-ElectricPower.com

Performance No.: EM1722-01

Feature Code: DTO

Generator Arrangement: 4861430

Date: 05/11/2016

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.