

M315D

Wheel Excavator



Engine

Engine Model	Cat [®] C4.4 ACERT™	
Net Power	101 kW	135 hp
	• Maximum power at 2,000 rpm	

Weights

Operating Weight	16 100 kg (35,494 lb) to 18 300 kg (40,345 lb)	
------------------	---	--

Transmission

Maximum Travel Speed	34 km/h	21 mph
----------------------	---------	--------

M315D Wheel Excavator

The D Series incorporates innovations for improved performance and versatility.

Engine

- ✓ Caterpillar's exclusive ACERT™ Technology surpasses the most stringent emissions requirements in the construction industry. The U.S. EPA Tier 3 compliant C4.4 offers increased performance and reliability while reducing fuel consumption and sound levels. **pg. 4**

Hydraulics

- ✓ The state of the art load-sensing hydraulic system combined with a separate dedicated swing pump provides fast cycle times, increased lift capacity and high bucket and stick forces. This combination maximizes your productivity in any job. **pg. 5**

Operator Comfort

- ✓ The totally redesigned operator station maximizes comfort while increasing safety. The available auto-weight adjusted air-suspension seat with heated and cooled ventilated cushions improves operator comfort. Safety is enhanced by the new color monitor and optional rear-mounted camera. **pg. 6**

Versatility

Caterpillar offers a wide variety of factory-installed attachments that enhance performance and job site management. **pg. 11**

Serviceability

- ✓ For increased safety, all daily maintenance points are accessible from ground level. A centralized greasing system allows lubrication of critical points. **pg. 12**

Increased lifting capacity, improved cycle times and ease of operation lead to increased productivity and lower operating costs.



Undercarriage

Various undercarriage configurations are available to provide the best solution for your work environment; these configurations can include a dozer blade and/or outriggers depending on your needs. **pg. 8**

Booms and Sticks

- ✓ Caterpillar® excavator booms and sticks are built for performance and long service life. The box section design provides the strength needed for even the toughest applications. Multiple boom and stick options allow you to pick the best match for your job. **pg. 9**

Work Tools

The combination of Caterpillar machines and work tools provide a total solution for any application. A variety of couplers, buckets, hammers, grapples, shears, multi-processors to name a few are offered to optimize your machine's versatility. **pg. 10**

Environmentally Responsible Design

- ✓ Helping to protect our environment, the engine has low operator and spectator sound levels, longer filter change intervals and is more fuel-efficient. **pg. 14**

Complete Customer Support

Your Cat® dealer offers a wide range of services that can be set up under a customer agreement when you purchase your equipment. Your dealer will help you choose a plan that can cover everything from machine and attachment selection to replacement. **pg. 15**



✓ *New Feature*

Engine

Built for power, reliability, low maintenance, excellent fuel economy and low emissions.



Powerful Performance. The Cat® C4.4 with ACERT™ Technology introduces a series of evolutionary, incremental improvements that provide breakthrough engine performance. The building blocks of ACERT Technology are fuel delivery, air management and electronic control. ACERT Technology optimizes engine performance while meeting U.S. EPA Tier 3 engine emission regulations. The Cat C4.4 engine in the M315D delivers a maximum gross power of 108 kW (145 hp) at a rated speed of 2,000 rpm. This is 13% more horsepower as compared to the 3054E in the M315C.

Low Fuel Consumption. The C4.4 is electronically controlled and uses the new Cat Common Rail Fuel System and fuel pump. This combination provides outstanding fuel consumption during both production and travel. When the system recognizes roading application the engine adjusts to the most efficient system operating point to save fuel without compromising road performance.

Low Noise, Low Vibration. The Cat C4.4 design improves operator comfort by reducing sound and vibration.

Cooling System. An electronically controlled, hydraulic motor drives a variable speed on-demand fan for engine coolant and hydraulic oil. The optimum fan speed is determined based on coolant and hydraulic oil temperature resulting in reduced fuel consumption and lower sound levels. The electronic engine control continuously compensates for the varying fan load, providing consistent net power, regardless of operating conditions.

One-Touch Low Idle Control.

The two-stage, one-touch Automatic Engine Speed Control reduces engine speed if no operation is performed, maximizing fuel efficiency and reducing sound levels.

Waste Handling Package. The Waste Handling Package has been specifically developed for Cat Wheel Excavators working in waste transfer stations or other extremely dusty applications. This option features the following:

- An automatic, hydraulic reversible fan that reverses airflow after a set interval, manually adjustable between 5 and 60 minutes with a switch located inside the cab.
- A special dense wire mesh cooling system hood further reduces radiator clogging.
- Two cyclone filters provide clean filtered air to the engine compartment, air cleaner, aftercooler and air conditioner condenser.

Hydraulics

Fast cycle times, increased lift capacity, and high bucket and stick forces combine to maximize your productivity in any job.

Dedicated Swing Pump. A dedicated variable displacement piston pump and fixed displacement piston motor power the swing mechanism. This closed hydraulic circuit maximizes swing performance without reducing power to the other hydraulic functions, resulting in smoother combined movements.

Heavy Lift Mode. This mode maximizes lifting performance by boosting the lifting capability of the excavator by 7 percent. Heavy loads can be easily moved in the full working range of the machine, maintaining excellent stability.

Adjustable Hydraulic Sensitivity. This function allows the operator to adjust the aggressiveness of the machine according to the application. For precision work, one of four different levels of aggressiveness can be pre-selected.



Proportional Auxiliary Hydraulics.

Versatility of the hydraulic system can be expanded to utilize a wide variety of hydraulic work tools using multiple valve options.

- The Multi-Combined Valve is the core of the Tool Control System, allowing the operator to select up to ten pre-programmed work tools from the monitor. These preset hydraulic parameters support either one-way or two-way flow. The joystick sliding switches allow modulated control of the work tool.



- A dedicated Hammer circuit is the best option for tools that require one-way flow only, and do not require the flexibility provided by the Multi-Combined Valve.
- The Medium Pressure Function Valve provides proportional flow that is ideal for tilting buckets or rotating tools.
- A new feature for the D-Series Wheel Excavators is the optional second High Pressure valve. In combination with the Multi-Combined Valve, it provides the possibility to operate the machine with work tools or in applications requiring a third auxiliary hydraulic function, such as a tilting/rotating quick coupler.

Stick Regeneration Circuit. The stick regeneration circuit increases efficiency and helps increase controllability for higher productivity and lower operating costs.

Quick Coupler. The machine can be optionally equipped with a dedicated hydraulic circuit to operate hydraulic quick couplers.

Hydraulic Snubbers. Caterpillar integrates its cylinder snubber technology into all Wheel Excavator boom, stick and bucket cylinders. These snubbers help cushion shocks, reduce sound and increase cylinder life.

Caterpillar XT™-6 ES Hoses. Premium quality rubber, precision 4-ply wire reinforcement and exclusive reusable couplings are all unique features that deliver top performance and long life.

Operator Comfort

The interior layout maximizes operator space, provides exceptional comfort and reduces operator fatigue.



Interior Operator Station. Improved visibility and ergonomics are some of the many new features of the D-Series Wheel Excavators. The pressurized operator station provides maximum space and is designed for simplicity and functionality. Frequently used switches are centralized and are situated on the right-hand switch console. The left-hand seat console controls dozer blade and/or outriggers, and is tiltable for easy access to the cab. The fully automatic climate control adjusts temperature and air flow for exceptional operator comfort. Other comfort features include a cigar lighter, ashtray, drink/bottle holder, magazine rack and integrated mobile phone holder.

Cab Construction. The exterior design uses thick steel tubing along the bottom perimeter of the cab, improving the resistance to fatigue and vibration. This design allows the falling object guards to be bolted directly to the cab. The cab shell is attached to the frame with rubber mounts that limit vibration and sound transmitted from the frame, substantially reducing interior noise levels.



Viewing Area. To maximize visibility, all glass is affixed directly to the cab, eliminating the use of window frames. Choice of fixed or easy-to-open split front windshield meets operator preference and application conditions.

- The 50/50 split front windshield allows both upper and lower portions to be stored in an overhead position and features the one-touch action release system.
- The 70/30 split front windshield stores the upper portion above the operator. The lower front windshield features a rounded design to maximize downward visibility and improves wiper coverage. Also features the one-touch action release system.
- The fixed front windshield comes with high impact resistant laminated glass.
- A unique large skylight without cross bar provides superb upward visibility. The retractable sunscreen blocks direct sunlight.



Monitor. The new compact color monitor displays information in local language that is easy to read and understanding. Functions include:

- 5 programmable “Quick Access” buttons for one-touch selection of favorite functions.
- Filter and oil change warnings are displayed when the number of hours reaches the maintenance interval.
- Tool select function allows the operator to select up to 10 pre-defined hydraulic work tools.

– Adjustable braking characteristics enable the operator to select three levels of travel motor retarder aggressiveness when releasing the travel pedal.

– Provides a rear camera view that is activated through the monitor menu. The optional camera is mounted on the counterweight.

New Deluxe Seat. The new optional deluxe seat, equipped with an active seat climate system, improves operator comfort. Cooled air flows through the seat cushions to reduce body perspiration. On cold days, a two-step seat heater keeps the operator warm and comfortable. The fully adjustable seat with adjustable lumbar support automatically adjusts to the driver’s weight providing a more relaxed and comfortable environment.

Heated Mirrors. Another new feature is electrically heated mirrors, increasing safety and visibility in cold conditions.

Wipers. The parallel wiper system maximizes visibility in poor weather conditions. The wiper virtually covers the entire front windshield, cleaning the operator’s immediate line of sight.

Lunch Box. A large, cooled storage compartment is located behind the operator’s seat. The compartment provides sufficient room to store items such as a lunch box. An optional cover secures the contents during machine operation.

Foot Pedals. Two-way pedals for travel and auxiliary circuits provide increased floor space, reducing the need to change positions. The foot pedal for auxiliary high-pressure circuit can be locked in the off position and used as a footrest for greater operator comfort.

Undercarriage

Undercarriage and axle design provides maximum strength, flexibility and mobility on wheels.



Heavy-Duty Axles and Stabilizers.

The D-Series Wheel Excavator undercarriage with pin on/bolt on design provides excellent flexibility, rigidity and long life. Effective hydraulic line routing, transmission protection and heavy-duty axles make the undercarriage perfect for wheel excavator applications. The front axle offers wide oscillating and steering angles. The transmission is mounted directly on the rear axle for protection and optimum ground clearance.

Advanced Disc Brake System. The disc brake system acts directly on the hub instead of the drive shaft to avoid planetary gear backlash. This solution eliminates the rocking effect associated with working free on wheels. The axle design lowers maintenance and lifetime costs. Oil change intervals are at 2,000 working hours, further reducing owner and operator costs.



Drive Line Concept. The rear mounted transmission and robust drive line design, delivers excellent ground clearance for all off-road applications.

Fenders. The optional fenders provide excellent coverage of the front and rear tires, protecting the machine from mud and dirt. Water cannot splash up on the wind screen or cooler. The fenders further protect the machine from stones and debris being thrown up by the tires, providing additional safety for the machine, other vehicles and personnel working close to the excavator.

Adjustable Travel Alarm. An adjustable travel alarm is available to warn people when the machine is moving. Three settings can be selected through the monitor.

- Auto mode – alarm will stop sounding immediately when the machine is no longer traveling, or has been sounding for an uninterrupted 10-second interval.
- Standard mode – alarm operates constantly during moving, with only manual cancellation.
- Off mode – Travel Alarm is disabled.

Booms and Sticks

Designed for maximum flexibility to keep production high on all jobs.



Industrial Stick

Sticks. Four different stick lengths are offered to match different application requirements:

- Short stick (2.1 m/6 ft 11 in) for maximum breakout force and lifting capability.
- Medium stick (2.4 m/7 ft 10 in) for greater crowd force and lift capacity.
- Long stick (2.6 m/8 ft 6 in) for greater depth and reach requirements.
- Industrial stick (3.1 m/10 ft 2 in) for use with free-swinging grapples in material handling and industrial applications.

Design. Booms and sticks are welded, box section structures with thick, multi-plate fabrications in high stress areas, for rugged performance and long service life.

Flexibility. The choice of two booms and four sticks provides the right balance of reach and digging forces for all applications.

One-Piece Boom. The one-piece boom fits best for all standard applications such as truck loading and digging. A unique straight section in the curve of the side plate reduces stress flow and helps increase boom life.



Variable Adjustable (VA) Boom.

The VA boom offers improved right side visibility and machine roading balance. When working in tight quarters or lifting heavy loads, the VA boom offers the best flexibility.

Offset Boom.

The offset boom adds major advantages as well as a high level of versatility. The large offset dimensions (left 2460 mm (8 ft 1 in) and right 2760 mm (9 ft 1 in)) enable you to dig along walls, over obstacles, grade while driving and dig under laid pipe. This combination coupled with a tiltable ditch cleaning bucket allows you to operate a highly versatile machine.

Work Tools

A wide variety of Work Tools help optimize machine performance. Purpose designed and built to Caterpillar's high durability standards.



Work Tools. Caterpillar work tools are designed to function as an integral part of your excavator and to provide the best possible performance in your particular application. All work tools are performance-matched to Cat machines.

Quick Couplers. Quick Couplers enable the operator to simply release one work tool and connect to another, making your hydraulic excavator highly versatile. Productivity also increases, as a carrier no longer needs to be idle between jobs. Caterpillar offers hydraulic and spindle quick coupler versions.

Buckets. Caterpillar offers a wide range of specialized buckets, each designed and tested to function as an integral part of your excavator. Buckets feature the new Caterpillar K Series™ Ground Engaging Tools.

Hammers. Cat hammer series deliver very high blow rates, increasing the productivity of your carriers in demolition and construction applications. Wide oil flow acceptance ranges make the Caterpillar hammers suitable for a wide range of carriers and provide a system solution from one safe source.

Orange Peel Grapples. The Orange Peel Grapple is constructed of high-strength, wear-resistant steel, with a low and compact design that makes it ideal for dump clearance. There are several choices of tine and shell versions.

Multi-Grapples. The Multi-Grapple with unlimited left and right rotation is the ideal tool for stripping, sorting, handling and loading. The powerful closing force of the grab shells combined with fast opening/closing time ensures rapid cycle time which translates to more tons per hour.

Multi-Processors. Thanks to its single basic housing design, the Multi-Processor series of hydraulic demolition equipment makes it possible to use a range of jaw sets that can handle any demolition job. The Multi-Processor is the most versatile demolition tool on the market.

Vibratory Plate Compactors.

Cat compactors are performance-matched to Cat machines, and integrate perfectly with the Cat hammer line – brackets and hydraulic kits are fully interchangeable between hammers and compactors.

Shears. Cat shears provide superior and effective scrap processing, and are highly productive in demolition environments. Shears are compatible with a matching Cat excavator, and bolt-on brackets are available for either stick or boom-mounted options.

Versatility

A wide variety of optional factory-installed attachments are available to enhance performance and improve job site management.

Joystick Steering. The unique joystick steering option enables an operator to reposition the machine while traveling in first gear by the use of the slider switch on the right joystick. This enables the operator to keep both hands on the joysticks while simultaneously moving the implements and traveling. The operator can do more precise work faster with increased safety around the machine.

Tool Control. The integrated Tool Control system allows the operator to select up to 10 pre-set combinations. This eliminates the need to re-set the hydraulic parameters each time a tool is changed. Individual flow and pressure can be programmed easily as well as one-way/two-way hydraulic functions. Each of the ten-programmed tools can even be given a specific name. The unique Cat proportional sliding switches and optional auxiliary pedal provide modulation to the tool to make precision work easy.

Ride Control. New for the D Series, the ride control system improves operator comfort and allows the machine to travel faster over rough terrain with improved ride quality for the operator. The ride control system features accumulators acting as shock absorbers to dampen the front part motion. Ride control can be activated through a button located on the soft switch panel in the cab.



Control Settings. There are 2 selectable control settings and one automatic travel setting. The new automatic travel mode is activated with a button in the right hand console. In this setting, the transmission will automatically shift up or down, depending on the speed conditions. The operator can choose the best power setting for both engine and hydraulic power versus fuel efficiency.

- Economy Mode – used for lifting, pipe setting, grading, slope finishing and precise work while reducing fuel consumption.
- Power Mode – used for normal truck loading and digging applications, trenching or hammer use.

- Travel Mode – automatically set when the travel pedal is actuated. It provides maximum speed and drawbar pull.

Product Link. Product Link can assist with Fleet Management to keep track of hours, location, security and product health. The machine is pre-wired to accept Product Link systems to be installed in the field. Product Link is also available as a factory installed attachment.

Machine Security. An optional Machine Security System is available from the factory. This system controls who can operate the machine when, and utilizes specific keys to prevent unauthorized machine use.



Serviceability

Simplified and easy maintenance save you time and money.



Front Compartment. The front compartment hood can be opened vertically, providing outstanding ground level access to the batteries, air-to-air after cooler, air conditioner condenser and the air cleaner filter.



Easy to Clean Coolers. Flat fins on all coolers reduce clogging, making it easier to remove debris. The main cooling fan and air conditioner condenser are both hinged for easier cleaning.

Swing-out Air Conditioner Condenser. The Air Conditioning condenser swings out horizontally to allow complete cleaning on both sides as well as excellent access to the air-to-air after cooler.

Air Filter. Caterpillar air filters eliminate the use of service tools, reducing maintenance time. The air filter features a double-element construction with wall flow filtration in the main element and built-in mini-cyclone precleaners for superior cleaning efficiency. The air filters are constantly monitored for optimum performance. If airflow becomes restricted, a warning is displayed by the way of the in-cab monitor.

Ground Level Maintenance. Caterpillar designed its D-Series Wheel Excavators with the operator and service technician in mind. Gull-wing doors, with pneumatically-assisted lift cylinders, effortlessly lift up to allow critical maintenance to be performed quickly and efficiently while maintaining operator safety.

Extended Service Intervals.

The D-Series Wheel Excavator service and maintenance intervals have been extended to reduce machine service time, increase machine availability and reduce operating costs. Using S•O•SSM Scheduled Oil Sampling analysis, hydraulic oil change intervals can be extended up to 4,000 hours. Engine coolant change intervals are 12,000 hours with Cat Extended Life Coolant.

Self-Monitoring System with Auto-Diagnostics. The electronic engine and machine controllers provide detailed diagnostic capability for the service technicians. The ability to store active and intermittent indicators simplifies problem diagnosis and reduces total repair time, resulting in improved machine availability and lower operating cost.

Engine Inspection. The engine can be accessed from both ground level and the upper structure. The longitudinal layout ensures that all daily inspection items can be accessed from ground level.

Capsule Filter. The hydraulic return filter, a capsule filter, prevents contaminants from entering the system when the hydraulic oil is changed.

Fuel Filters. Cat high efficiency fuel filters with a Stay-Clean Valve™ features a special media that removes more than 98 percent of particles, increasing fuel injector life. Both the primary and secondary fuel filters are located in the engine compartment and can be easily changed from ground level.



New Auto-Lube System. The new automatic lubrication system provides the optimal amount of grease to all the main lubrication points, including the bucket linkage. The lubrication interval can be adjusted through the monitor, and status messages for the auto-lube system are displayed.

Scheduled Oil Sampling. Caterpillar has specially developed S•O•SSM Oil Sampling Analysis to help ensure better performance, longer life and increased customer satisfaction. This thorough and reliable early warning system detects traces of metals, dirt and other contaminants in your engine, axle and hydraulic oil. It can predict potential trouble avoiding costly failures. Your Caterpillar dealer can give you results and specific recommendations shortly after receiving your sample.

Engine Oil. Caterpillar engine oil is formulated to optimize engine life and performance. The specially formulated oil is more cost effective and increases engine oil change interval to 500 hours, providing industry leading performance and savings.

Water Separator. The D Series is equipped with a primary fuel filter with water separator located in the engine compartment. For ease of service, the water separator can be easily accessed from ground level.

Fuel Tank Drain. The durable, corrosion-free tank has a remote drain located at the bottom of the upper frame to remove water and sediment. The tank drain with hose connection allows simple, spill-free fluid draining.

Remote Greasing Blocks. For those hard to reach locations, greasing blocks have been provided to reduce maintenance time. One block is located in the engine compartment with two grease points for the swing bearing and front-end attachment. For the undercarriage, two remote blocks provide easy access for greasing the oscillating axle and, as an option, the dozer blade.



New LED Rear Lights. Optional Light Emitting Diode (LED) Rear Lights replace the standard lights, for increased visibility on the job site, higher durability and longer life.

Handrails and Steps. Large handrails and steps assist the operator in climbing on and off the machine.



Storage Box. There are two toolboxes integrated in the steps of the undercarriage. Additionally, there is a waterproof storage box integrated into the upper structure steps.



Anti-Skid Plate. They cover the top of the steps and upper structure to help prevent slipping during maintenance. The Anti-Skid plate reduces the accumulation of mud on the upper structure, improving the cleanliness and safety.

Environmentally Responsible Design

The M315D helps build a better world and preserve the fragile environment.



Fuel Efficiency. The D-Series Wheel Excavators are designed for outstanding performance with high fuel efficiency. This means more work done in a day, less fuel consumed and minimal impact on our environment.

Low Exhaust Emissions. The U.S. EPA Tier 3 compliant Cat C4.4 offers increased performance and reliability while reducing fuel consumption and sound levels.

Quiet Operation. Operator and spectator noise levels are extremely low as a result of the new variable speed fan and remote cooling system.

Biodegradable Hydraulic Oil.

The optional biodegradable hydraulic oil (HEES™) is formulated to provide excellent high-pressure and high-temperature characteristics, and is fully compatible with all hydraulic components. HEES is fully decomposed by soil or water microorganisms, providing a more environmentally-sound alternative to mineral-based oils.

Fewer Leaks and Spills. Lubricant fillers and drains are designed to minimize spills. Cat O-Ring Face Seals, Cat XT™ Hose and hydraulic cylinders are all designed to help prevent fluid leaks that can reduce the machine performance and cause harm to the environment.

Longer Service Intervals. Working closely with your Caterpillar Dealer can help extend service intervals for engine oil, hydraulic oil, axle oil and coolant. Meaning fewer required fluids and fewer disposals, all adding up to lower operating costs.

Complete Customer Support

Cat dealer services help you operate longer with lower costs.

Product Support. You will find nearly all parts requirements at your local Caterpillar dealer parts counter. Cat dealers utilize a world-wide network to find in-stock parts to minimize your downtime. To save money use genuine Cat Reman parts. You will receive the same warranty and reliability as new products at a substantial cost savings.

Selection. Make detailed comparisons of the machines you are considering before you buy. How long do components last? What is the cost of preventive maintenance? Your Cat dealer can give you precise answers to these questions to make sure you operate your machines at the lowest cost.

Purchase. Consider the financing options available as well as day-to-day operating costs. This is also the time to look at dealer services that can be included in the cost of the machine to yield lower equipment and owning and operating costs over the long run.

Operation. Improving operating techniques can boost your profits. Your Cat dealer has videotapes, literature and other ideas to help you increase productivity, and Caterpillar offers certified operator training classes to help maximize the return on your machine investment.



Maintenance. More and more equipment buyers are planning for effective maintenance before buying equipment. Choose from your dealer's wide range of maintenance services at the time you purchase your machine. Repair option programs guarantee the cost of repairs up front. Diagnostic programs such as S•O•SSM Fluid Analysis and Technical Analysis help you avoid unscheduled repairs.

Replacement. Repair, rebuild or replace? Your Cat dealer can help you evaluate the cost involved so you can make the right choice.

Services. Customer Service is critical today in every business. That's why so many people buy Cat equipment. They know they are getting quality, reliability and performance backed-up with the best Customer Service. Your Caterpillar dealer offers a wide range of services that can be set up under a Customer Support Agreement. The dealer will help you choose a plan that can cover the whole machine including work tools, to help you getting the best out of your investment.

Engine

Engine Model	Cat® C4.4 ACERT™	
Net Power	101 kW	135 hp
Gross Power	108 kW	145 hp
ISO 9249	101 kW	135 hp
EEC 80/1269	101 kW	135 hp
Bore	105 mm	4.13 in
Stroke	127 mm	5 in
Displacement	4.4 L	269 in ³
Cylinders	4	
Maximum Torque at 1,400 rpm	550 N·m	406 lb ft

- Maximum power at 2,000 rpm

Weights

Operating Weight	15 700 kg (34,615 lb) to 17 900 kg (39,465 lb)	
VA Boom		
Rear dozer only	15 300 kg	33,731 lb
Rear dozer, front outriggers	16 250 kg	35,825 lb
Front and rear outriggers	16 550 kg	36,486 lb
One-Piece Boom		
Rear dozer only	14 850 kg	32,739 lb
Rear dozer, front outriggers	15 800 kg	34,833 lb
Front and rear outriggers	16 100 kg	35,494 lb
Offset Boom		
Rear dozer only	15 800 kg	34,833 lb
Rear dozer, front outriggers	16 750 kg	36,927 lb
Front and rear outriggers	17 050 kg	37,589 lb
Dozer Blade	750 kg	1,653 lb
Outriggers	960 kg	2,116 lb
Counterweight	3500 kg	7,716 lb
2.1 m (6'11") stick	470 kg	1,036 lb
2.4 m (7'10") stick	514 kg	1,133 lb
2.6 m (8'6") stick	530 kg	1,168 lb
3.1 m (10'2") Industrial stick	450 kg	992 lb

- Above weights are calculated with standard counterweight.
Heavy counterweight option adds 400 kg (882 lb).

Swing Mechanism

Swing Speed	10.5 rpm	
Swing Torque	40 kN·m	29,502 lb ft

Hydraulic System

Maximum Pressure

Implement circuit		
normal	35 000 kPa	5,076 psi
heavy lift	37 500 kPa	5,439 psi
Travel circuit	35 000 kPa	5,076 psi
Auxiliary circuit		
high pressure	35 000 kPa	5,076 psi
medium pressure	18 500 kPa	2,683 psi
Swing mechanism	37 000 kPa	5,366 psi

Maximum flow

Implement/travel circuit	220 L/min	58 gal/min
Auxiliary circuit		
high pressure	220 L/min	58 gal/min
medium pressure	50 L/min	13 gal/min
Swing mechanism	80 L/min	21 gal/min

Transmission

Maximum Travel Speed	34 km/h	21 mph
1st Gear, Forward/Reverse	8 km/h	5 mph
2nd Gear, Forward/Reverse	34 km/h	21 mph
Creeper Speed (1st Gear)	3 km/h	2 mph
Creeper Speed (2nd Gear)	13 km/h	8 mph
Drawbar Pull	97 kN	21,806 lb
Maximum Gradeability	69%	

Service Refill Capacities

Fuel Tank Capacity	235 L	62 gal
Cooling	30 L	7.9 gal
Engine Crankcase	8 L	2.1 gal
Rear Axle Housing (Differential)	14 L	3.7 gal
Front Steering Axle (Differential)	10.5 L	2.8 gal
Final Drive		
Final Drive	2.5 L	0.7 gal
Powershift Transmission	2.5 L	0.7 gal
Hydraulic Tank	135 L	36 gal
Hydraulic System (including tank)	220 L	58 gal

Tires

Optional	See Optional Equipment	
Standard	10.00-20 dual pneumatic	

Undercarriage

Ground Clearance	370 mm	15 in
Maximum Steering Angle ±	35°	
Oscillating Axle Angle ±	9°	

Standard Axle

Minimum Turning Radius (Outside of tire)	6.3 m	21 ft
Minimum Turning Radius (End of VA boom)	6.9 m	23 ft
Minimum Turning Radius (End of One-piece boom)	8.3 m	27 ft

Wide Axle

Minimum Turning Radius (Outside of tire)	6.5 m	21 ft
Minimum Turning Radius (End of VA boom)	7.1 m	23 ft
Minimum Turning Radius (End of One-piece boom)	8.4 m	28 ft

Sound Performance

Performance	Exterior sound power level according to 2000/14/EC is 103 db(A) Interior sound pressure level LpA is 72 db(A)
-------------	--


- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT 98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in noisy environment.

Standards


Brakes	SAE J1026 APR 90
Cab/FOGS	ISO 10262

Dimensions


All dimensions are approximate.

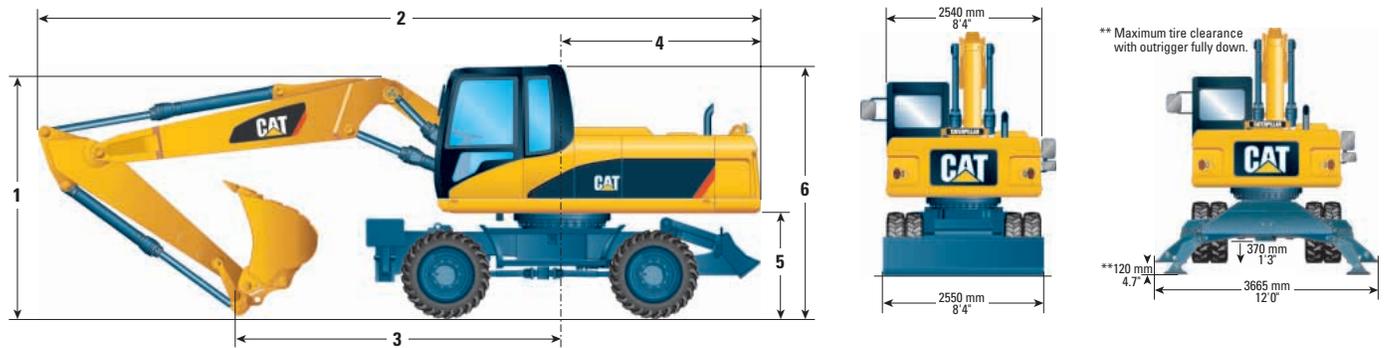


Undercarriage with dozer only

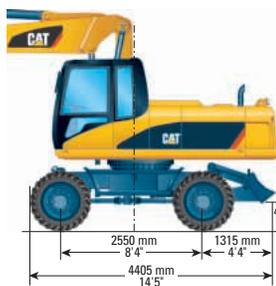


Undercarriage with 2 sets of outriggers

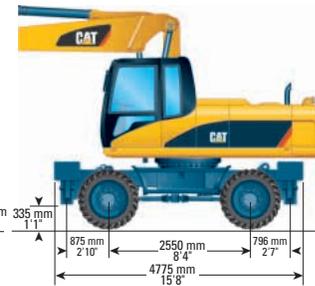

Undercarriage with 1 set of outriggers and dozer

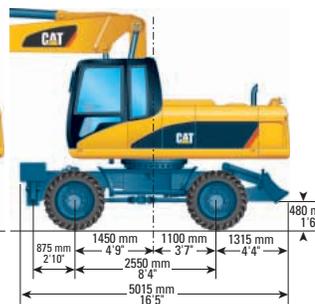

Roading position with 2.4 m/7'10" stick

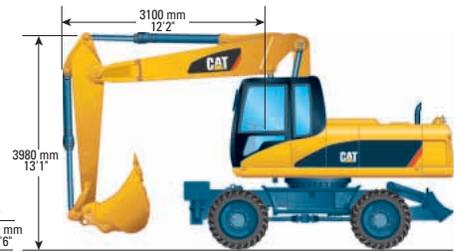


Stick Options	2.1 m (6'11")		2.4 m (7'10")		2.6 m (8'6")		Industrial Stick 3.1 m (10'2")	
	mm	ft/in	mm	ft/in	mm	ft/in	mm	ft/in
1 Shipping Height								
VA Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
One-piece Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
Offset Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
2 Shipping Length								
VA Boom	8480	27'10"	8480	27'10"	8470	27'9"	8450	27'9"
One-piece Boom	8320	27'4"	8330	27'4"	8330	27'4"	8350	27'5"
Offset Boom	8480	27'10"	8470	27'9"	8470	27'9"	8350	27'5"
3 Support Point								
VA Boom	3910	12'10"	3660	12'0"	3560	11'8"	3640	11'11"
One-piece Boom	3560	11'8"	3280	10'9"	3160	10'4"	3240	10'8"
Offset Boom	4030	13'3"	3780	12'5"	3160	10'4"	3240	10'8"
4 Tail Swing Radius								
VA Boom	2215	7'3"	2215	7'3"	2215	7'3"	2215	7'3"
One-piece Boom	2215	7'3"	2215	7'3"	2215	7'3"	2215	7'3"
Offset Boom	2215	7'3"	2215	7'3"	2215	7'3"	2215	7'3"
5 Counterweight Clearance								
VA Boom	1262	4'2"	1262	4'2"	1262	4'2"	1262	4'2"
One-piece Boom	1262	4'2"	1262	4'2"	1262	4'2"	1262	4'2"
Offset Boom	1262	4'2"	1262	4'2"	1262	4'2"	1262	4'2"
6 Cab Height								
VA Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
One-piece Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
Offset Boom	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"


Note: All dimensions are approximate and cab height is without Falling Object Guards.

VA Boom, One-piece and Offset Boom Working Ranges


2.1 m (6'11"), 2.4 m (7'10"), 2.6 m (8'6"),
3.1 m (10'2") Sticks

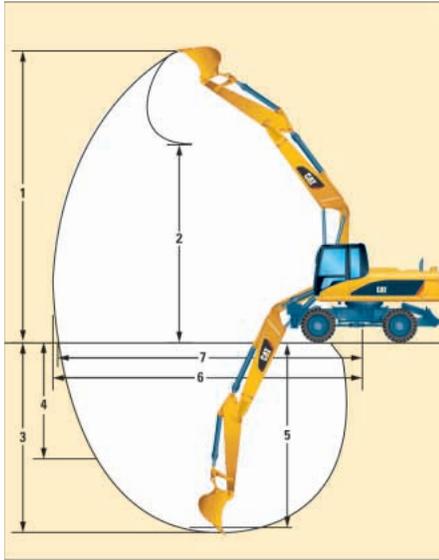

2.1 m (6'11"), 2.4 m (7'10"), 2.6 m (8'6"),
3.1 m (10'2") Sticks

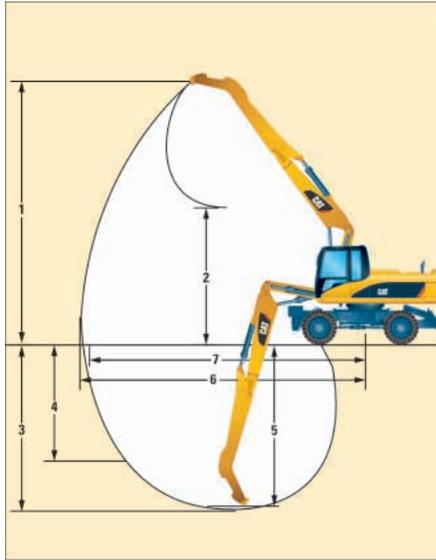

2.1 m (6'11"), 2.4 m (7'10") Sticks

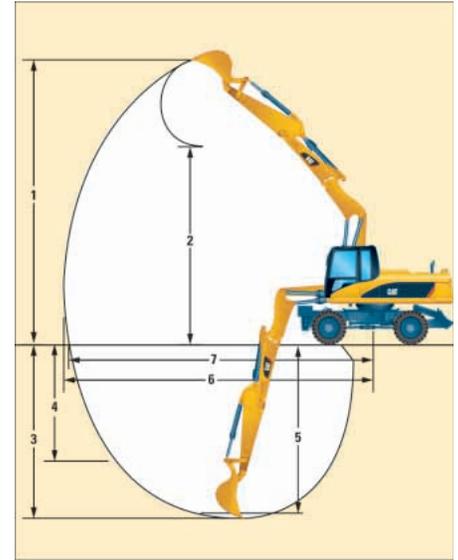

	VA Boom				One-piece Boom				Offset Boom	
	2.1 m (6'11")	2.4 m (7'10")	2.6 m (8'6")	Industrial Stick* 3.1 m (10'2")	2.1 m (6'11")	2.4 m (7'10")	2.6 m (8'6")	Industrial Stick* 3.1 m (10'2")	2.1 m (6'11")	2.4 m (7'10")
1 Digging Height	10 040 mm (33'0")	10 230 mm (33'7")	10 380 mm (34'1")	8950 mm (29'5")	8980 mm (29'6")	9070 mm (29'9")	9190 mm (30'2")	7700 mm (25'3")	10 040 mm (33'0")	10 230 mm (33'7")
2 Dump Height	6950 mm (22'10")	7140 mm (23'5")	7300 mm (24'0")	3960 mm (12'0")	6000 mm (19'8")	6110 mm (20'1")	6230 mm (20'5")	3200 mm (10'6")	6950 mm (22'10")	7140 mm (23'5")
3 Digging Depth	5590 mm (18'4")	5890 mm (19'4")	6090 mm (20'0")	5040 mm (16'7")	5390 mm (17'8")	5690 mm (18'8")	5890 mm (19'4")	4840 mm (15'11")	5590 mm (18'4")	5890 mm (19'4")
4 Vertical Wall Digging Depth	3720 mm (12'3")	3920 mm (12'10")	4090 mm (13'5")	N/A	3510 mm (11'6")	3650 mm (12'0")	3820 mm (12'7")	N/A	3720 mm (12'3")	3920 mm (12'10")
5 Depth 2.5 m (8'2") Straight Clean-up	5370 mm (17'8")	5690 mm (18'8")	5900 mm (19'4")	N/A	5170 mm (17'0")	5490 mm (18'0")	5700 mm (18'9")	N/A	5370 mm (17'8")	5690 mm (18'8")
6 Reach	9100 mm (29'11")	9360 mm (30'9")	9560 mm (31'5")	8370 mm (27'6")	8900 mm (29'3")	9160 mm (30'1")	9350 mm (30'8")	8130 mm (26'8")	9100 mm (29'11")	9360 mm (30'9")
7 Reach at Ground Level	8910 mm (29'3")	9190 mm (30'2")	9380 mm (30'10")	8170 mm (26'10")	8710 mm (28'7")	8970 mm (29'5")	9170 mm (30'1")	7920 mm (25'0")	8910 mm (29'3")	9190 mm (30'2")
Bucket Forces (ISO 6015)	101 kN (22 705 lbf)	101 kN (22 705 lbf)	101 kN (22 705 lbf)	N/A	101 kN (22 705 lbf)	101 kN (22 705 lbf)	101 kN (22 705 lbf)	N/A	101 kN (22 705 lbf)	101 kN (22 705 lbf)
Stick Forces (ISO 6015)	81 kN (18 209 lbf)	74 kN (16 635 lbf)	71 kN (15 961 lbf)	N/A	81 kN (18 209 lbf)	74 kN (16 635 lbf)	71 kN (15 961 lbf)	N/A	81 kN (18 209 lbf)	74 kN (16 635 lbf)

* Industrial Stick has no bucket linkage. All dimensions refer to stick-nose.

Values 1-7 are calculated with bucket and quick coupler with a tip radius of 1552 mm (5'1").

Breakout force values are calculated with heavy lift on (no quick coupler) and a tip radius of 1405 mm (4'7").

Work Tools Matching Guide

When choosing between various work tool models that can be installed onto the same machine configuration, consider work tool application, productivity requirements, and durability. Refer to work tool specifications for application recommendations and productivity information.

			Variable adjustable boom 5200 mm (17'1")									One-piece boom 5050 mm (16'7")								
			Dozer lowered			2 sets of stabilizer lowered			Dozer and stabilizer lowered			Dozer lowered			2 sets of stabilizer lowered			Dozer and stabilizer lowered		
			2100	2400	2600	2100	2400	2600	2100	2400	2600	2100	2400	2600	2100	2400	2600	2100	2400	2600
Without quick coupler			(mm)			Stick length (ft/in)			(mm)			Stick length (ft/in)			(mm)			Stick length (ft/in)		
			6'10"	7'10"	8'6"	6'10"	7'10"	8'6"	6'10"	7'10"	8'6"	6'10"	7'10"	8'6"	6'10"	7'10"	8'6"	6'10"	7'10"	8'6"
Hammers	H100, H115 s																			
	H120C s				×			×			×			×			×		×	
Multiprocessors	MP15	CC,CR,PS,S	×	×	×							×	×	×						
		PP	×	×	×			×			×	×	×			×		×		
360° rotatable Shears (boom mounted)	S320																			
	S325		×	×	×							×	×	×						
Sorting & Demo Grapple	G315B	D																		
		R																		
Compactors	CVP75	D, R	×	×	×							×	×	×						
Orange Peel Grapples (4 tines)	GSH15	400 L (0.5 yd³)	×	×	×															
		500 L (0.67 yd³)	×	×	×								×	×	×					
		600 L (0.75 yd³)	×	×	×								×	×	×					
		800 L (1.00 yd³)	×	×	×								×	×	×					

• Not all work tools are available in all areas.

- 360° Working Range
- Over the front only
- Maximum Material density 1800 kg/m³ (3,000 lb/yd³)
- Maximum Material density 1200 kg/m³ (2,000 lb/yd³)
- × Not Compatible

Bucket Specifications



Contact your Caterpillar dealer for special bucket requirements.

Pin-on Buckets

Bucket Type	Width		Weight		Capacity (SAE)		No. of Teeth
	mm	in	kg	lb	m ³	yd ³	
General Purpose	610	24	384	847	0.34	0.45	3
	762	30	436	963	0.47	0.62	4
	914	36	489	1080	0.61	0.8	5
	991	39	569	1257	0.74	0.97	4
	1067	42	534	1179	0.78	1.02	5
	1219	48	586	1294	0.88	1.15	6
	1295	51	672	1484	1.03	1.35	5
General Purpose Wide Tip	1397	55	704	1554	1.12	1.47	5
	610	24	445	983	0.44	0.58	3
	762	30	506	1116	0.58	0.76	4
	914	36	577	1274	0.76	0.99	5
	1067	42	581	1282	0.92	1.2	6
Heavy Duty Rock	1219	48	704	1554	1.07	1.4	7
	610	24	464	1025	0.34	0.45	3
	762	30	539	1190	0.47	0.62	4
	914	36	614	1355	0.61	0.8	5
	1067	42	668	1474	0.78	1.02	5
	1219	48	743	1640	0.88	1.15	6
Ditch Cleaning	1295	51	708	1563	1.03	1.35	5
	1524	60	572	1263	0.96	1.25	0
	1676	66	606	1338	1.06	1.38	0
Ditch Cleaning Tilt	2007	79	424	935	0.54	0.7	0
	1524	60	634	1400	0.67	0.87	0
	1803	71	362	800	0.48	0.63	0
	2007	79	392	866	0.54	0.7	0

- All bucket recommendations are subject to material density.
- All data is subject to change without notice.
- Contact your Caterpillar dealer for bucket availability and specifications.

VA Boom – 2.1 m (6'11") stick

Stick 2.1 m (6'11")		Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				
													m/ft
			kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	
	6.0 m (20.0 ft)	Rear dozer up (Load over front)			6700	4200	4100	2500					
		Rear dozer down (Load over rear)			*6700	4800	*4800	2900					
		Rear stab down (Load over rear)			*14,770	10,580	*10,580	6,390					
		2 sets stab down (Load over front)			*6700	*5300	*4800	3500					
		Dozer and stab down (Load over front)			*14,770	*11,690	*10,580	7,720					
		2 sets stab down (Load over front)			*6700	*5300	*4800	*4800					
		Dozer and stab down (Load over front)			*14,770	*11,690	*10,580	*10,580					
		Dozer and stab down (Load over front)			*6700	*5300	*4800	4300					
		Dozer and stab down (Load over front)			*14,770	*11,690	*10,580	9,480					
			4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg	*6700	*6700	7200	4100	2600			
Rear dozer down (Load over rear)	lb			*14,770	*14,770	15,870	9,040	9,040	5,730			5,730	3,530
Rear stab down (Load over rear)	kg			*6700	*6700	*7800	4700	*4900	3000			*2600	1900
Rear stab down (Load over rear)	lb			*14,770	*14,770	*17,800	10,360	*10,800	6,610			5,730	4,190
2 sets stab down (Load over front)	kg			*6700	*6700	*7800	5600	*4900	3600			*2600	2300
2 sets stab down (Load over front)	lb			*14,770	*14,770	*17,800	12,350	*10,800	7,940			5,730	5,070
Dozer and stab down (Load over front)	kg			*6700	*6700	*7800	*6000	*4900	*4900			*2600	*2600
Dozer and stab down (Load over front)	lb			*14,770	*14,770	*17,800	*13,230	*10,800	*10,800			5,730	5,730
Dozer and stab down (Load over front)	kg			*6700	*6700	*7800	*6000	*4900	4300			*2600	*2600
Dozer and stab down (Load over front)	lb			*14,770	*14,770	*17,800	*13,230	*10,800	9,480			5,730	5,730
	3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg	*7800	7200	7000	4000	4100	2700	1600	2400	1400	
		Rear dozer down (Load over rear)	lb	*17,800	15,870	15,430	8,820	9,040	5,730	5,950	3,530	5,290	3,090
		Rear stab down (Load over rear)	kg	*7800	*7800	8200	4600	*5300	3000	4200	1900	*2600	1700
		Rear stab down (Load over rear)	lb	*17,800	*17,800	18,080	10,140	*11,690	6,610	9,260	4,190	*5,730	3,530
		2 sets stab down (Load over front)	kg	*7800	*7800	*10,000	5500	*5300	3600	3700	2300	*2600	2100
		2 sets stab down (Load over front)	lb	*17,800	*17,800	*22,050	12,130	*11,690	7,940	8,160	5,070	*5,730	4,630
		Dozer and stab down (Load over front)	kg	*7800	*7800	*10,000	*7100	*5300	*5000	*4400	3400	*2600	*2600
		Dozer and stab down (Load over front)	lb	*17,800	*17,800	*22,050	*15,650	*11,690	*11,020	*9,700	7,500	*5,730	*5,730
		Dozer and stab down (Load over front)	kg	*7800	*7800	*10,000	6500	*5300	*4200	*4400	2800	*2600	2500
		Dozer and stab down (Load over front)	lb	*17,800	*17,800	*22,050	14,330	*11,690	*9,260	*9,700	6,170	*5,730	5,510
	1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg	10,000	7000	6600	3900	4100	2500	2700	1600	2400	1400
		Rear dozer down (Load over rear)	lb	22,050	15,403	14,550	8,600	9,040	5,510	5,950	3,530	5,070	3,090
		Rear stab down (Load over rear)	kg	*10,000	8200	7900	4500	*5600	2900	4100	1800	*2700	1600
		Rear stab down (Load over rear)	lb	*22,050	18,080	17,420	9,920	*12,350	6,390	9,040	3,970	*5,950	3,530
		2 sets stab down (Load over front)	kg	*10,000	*10,000	10,200	5400	5300	3500	3700	2300	*2700	2000
		2 sets stab down (Load over front)	lb	*22,050	*22,050	22,490	11,910	11,690	7,720	8,160	5,070	*5,950	4,410
		Dozer and stab down (Load over front)	kg	*10,000	*10,000	*11,800	7500	*5600	*4900	*4400	3400	*2700	*2700
		Dozer and stab down (Load over front)	lb	*22,050	*22,050	*26,010	16,540	*12,350	*10,800	*9,700	7,500	*5,950	*5,950
		Dozer and stab down (Load over front)	kg	*10,000	*10,000	*11,800	6400	*5600	4200	*4400	2800	*2700	2500
		Dozer and stab down (Load over front)	lb	*22,050	*22,050	*26,010	14,110	*12,350	9,260	*9,700	6,170	*5,950	5,510
Ground	Ground	Rear dozer up (Load over front)	kg	*11,800	6600	6600	3800	3900	2400	2600	1500	2400	1400
		Rear dozer down (Load over rear)	lb	*26,010	14,550	14,550	8,380	8,600	5,290	5,730	3,310	5,290	3,090
		Rear stab down (Load over rear)	kg	*11,800	7900	7800	4400	*5700	2700	*4000	1800	*2900	1700
		Rear stab down (Load over rear)	lb	*26,010	17,420	17,800	9,700	*12,570	5,950	*8,820	3,970	*6,390	3,750
		2 sets stab down (Load over front)	kg	*11,800	10,200	10,100	5400	5400	3400	3600	2200	*2900	2100
		2 sets stab down (Load over front)	lb	*26,010	22,490	22,270	11,910	11,910	7,500	7,940	4,850	*6,390	4,630
		Dozer and stab down (Load over front)	kg	*11,800	*11,800	*12,800	7600	*5700	4900	*4000	3300	*2900	*2900
		Dozer and stab down (Load over front)	lb	*26,010	*26,010	*28,220	16,760	*12,570	10,800	*8,820	7,280	*6,390	*6,390
		Dozer and stab down (Load over front)	kg	*11,800	*11,800	*12,600	6400	*5700	4100	*4000	2800	*2900	2500
		Dozer and stab down (Load over front)	lb	*26,010	*26,010	*27,780	14,110	*12,570	9,040	*8,820	6,170	*6,390	5,510
-1.5 m (-5.0 ft)	-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg	12,400	6600	6700	3600	3800	2200			2700	1600
		Rear dozer down (Load over rear)	lb	27,340	14,550	14,770	7,940	8,380	4,850			5,950	3,530
		Rear stab down (Load over rear)	kg	*12,800	7800	7900	4200	*5700	2600			*3200	1800
		Rear stab down (Load over rear)	lb	*28,220	17,800	17,420	9,260	*12,570	5,730			*7,060	3,970
		2 sets stab down (Load over front)	kg	*12,800	10,100	10,200	5200	5200	3200			*3200	2300
		2 sets stab down (Load over front)	lb	*28,220	22,270	22,490	11,460	11,460	7,060			*7,060	5,070
		Dozer and stab down (Load over front)	kg	*12,800	*12,800	*13,000	*7800	*5700	4800			*3200	*3200
		Dozer and stab down (Load over front)	lb	*28,220	*28,220	*28,880	*17,800	*12,570	10,580			*7,060	*7,060
		Dozer and stab down (Load over front)	kg	*12,800	*12,600	*13,000	6400	*5700	3900			*3200	2800
		Dozer and stab down (Load over front)	lb	*28,220	*27,780	*28,660	14,110	*12,570	8,600			*7,060	6,170
-3.0 m (-10.0 ft)	-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg	12,500	6700		3400						
		Rear dozer down (Load over rear)	lb	27,560	14,770		7,500						
		Rear stab down (Load over rear)	kg	*13,100	7900		4000						
		Rear stab down (Load over rear)	lb	*28,880	17,420		8,820						
		2 sets stab down (Load over front)	kg	*13,100	10,200		5000						
		2 sets stab down (Load over front)	lb	*28,880	22,490		11,020						
Dozer and stab down (Load over front)	kg	*13,100	*13,100		*7400								
Dozer and stab down (Load over front)	lb	*28,880	*28,880		*16,310								
Dozer and stab down (Load over front)	kg	*13,100	13,000		6200								
Dozer and stab down (Load over front)	lb	*28,880	28,660		13,670								

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

VA Boom – 2.4 m (7'10") stick

Stick
2.4 m (7'10")



Load Point Height



Load Radius Over Front or Rear




Load Radius Over Side



Load at Maximum Reach

Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		m/ft	
	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
6.0 m (20.0 ft)										
Rear dozer up (Load over front)	kg		*4800	4200						
Rear dozer down (Load over rear)	kg		*10,580	9,260						
Rear stab down (Load over rear)	kg		*4800	*4800						
2 sets stab down (Load over front)	kg		*10,580	*10,140						
Dozer and stab down (Load over front)	kg		*4800	*4600						
	lb		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						
	kg		*10,580	*10,140						
	lb		*10,580	*10,140						



VA Boom – 2.6 m (8'6") stick

Stick 2.6 m (8'6")		Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m/ft	
														
			kg	lb	kg	lb	kg	lb	kg	lb	kg	lb		
	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg		*4300	4200	4200	2600						
		Rear dozer down (Load over rear)	kg		*9,480	9,260	9,260	5,730						
		Rear stab down (Load over rear)	kg		*4300	*4300	*4400	3000						
		2 sets stab down (Load over front)	kg		*9,480	*9,480	*9,700	6,610						
		Dozer and stab down (Load over front)	kg		*4300	*4300	*4400	*3600						
		2 sets stab down (Load over rear)	kg		*9,480	*9,480	*9,700	*7,940						
		Dozer and stab down (Load over front)	kg		*4300	*4300	*4400	*4400						
	4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg		*5000	4100	4100	2700	2800	1700	*2100	1500	8.17 m (26'10")	
		Rear dozer down (Load over rear)	kg		*11,020	9,040	9,040	5,950	6,170	3,750	*4,630	3,310		
		Rear stab down (Load over rear)	kg		*5000	4700	*4700	3000	*3500	1900	*2100	1700		
		2 sets stab down (Load over front)	kg		*11,020	10,360	*10,360	6,610	*7,720	4,190	*4,630	3,750		
		Dozer and stab down (Load over front)	kg		*5000	*5000	*4700	3600	*3500	2400	*2100	*2100		
		2 sets stab down (Load over rear)	kg		*11,020	*11,020	*10,360	7,940	*7,720	5,290	*4,630	*4,630		
		Dozer and stab down (Load over front)	kg		*5000	*5000	*4700	*3500	3500	*2100	*2100	*2100		
	3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg	*8400	7300	6300	4000	4100	2600	1700	*2100	1300	8.57 m (28'1")	
		Rear dozer down (Load over rear)	kg	*18,520	16,090	13,890	8,820	9,040	5,730	6,170	3,750	*4,630		2,870
		Rear stab down (Load over rear)	kg	*8400	*8400	*6700	4600	*5100	3000	*4200	1900	*2100		1500
		2 sets stab down (Load over front)	kg	*18,520	*18,520	*14,770	10,140	*11,240	6,610	*9,260	4,190	*4,630		3,310
		Dozer and stab down (Load over front)	kg	*8400	*8400	*6700	5500	*5100	3600	3800	2400	*2100		1900
		2 sets stab down (Load over rear)	kg	*18,520	*18,520	*14,770	12,130	*11,240	7,940	8,380	5,290	*4,630		4,190
		Dozer and stab down (Load over front)	kg	*8400	*8400	*6700	6500	*5100	4200	*4200	2900	*2100		*2100
	1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg	*9900	7100	6200	3900	4100	2600	1700	*2100	1200	8.67 m (28'5")	
		Rear dozer down (Load over rear)	kg	*21,830	15,650	13,670	8,600	9,040	5,730	5,950	3,530	*4,630		2,850
		Rear stab down (Load over rear)	kg	*9900	8100	*7600	4500	*5500	3000	4200	1900	*2200		1500
		2 sets stab down (Load over front)	kg	*21,830	17,860	*16,760	9,920	*12,130	6,610	9,260	4,190	*4,850		3,310
		Dozer and stab down (Load over front)	kg	*9900	*9900	*7600	5400	5300	3600	3700	2300	*2200		1800
		2 sets stab down (Load over rear)	kg	*21,830	*21,830	*16,760	11,910	11,680	7,940	8,160	5,070	*4,850		3,970
		Dozer and stab down (Load over front)	kg	*9900	*9900	*7600	6400	*5500	4200	*4300	2900	*2200		*2200
	Ground	Rear dozer up (Load over front)	kg	*11,200	6900	6200	3800	4000	2500	2700	1600	2200	1300	8.47 m (27'9")
		Rear dozer down (Load over rear)	kg	*24,690	15,210	13,670	8,380	8,820	5,510	5,950	3,530	*4,850	2,870	
		Rear stab down (Load over rear)	kg	*11,200	8200	*7800	4400	*5600	2800	4100	1800	*2300	1500	
		2 sets stab down (Load over front)	kg	*24,690	18,080	*17,800	9,700	*12,350	6,170	9,040	3,970	*5,070	3,310	
		Dozer and stab down (Load over front)	kg	*11,200	10,100	*7800	5400	5300	3500	3700	2300	*2300	1900	
		2 sets stab down (Load over rear)	kg	*24,690	22,270	*17,800	11,910	11,690	7,720	8,160	5,070	*5,070	4,190	
		Dozer and stab down (Load over front)	kg	*11,200	*24,690	*17,800	*16,540	*12,350	11,020	*9,480	7,500	*5,070	*5,070	
	-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg	12,200	6600	6200	3600	3800	2300	2600	1500	2400	1400	7.94 m (26'1")
		Rear dozer down (Load over rear)	kg	26,900	14,550	13,670	7,940	8,380	5,070	5,730	3,310	5,290	3,090	
		Rear stab down (Load over rear)	kg	*12,700	7900	*7900	4200	*5700	2600	*3400	1800	*2600	1600	
		2 sets stab down (Load over front)	kg	*28,000	17,420	*17,420	9,260	*12,570	5,730	*7,500	3,970	*5,730	3,530	
		Dozer and stab down (Load over front)	kg	*12,700	10,200	*7900	5200	5300	3300	*3400	2200	*2600	2100	
		2 sets stab down (Load over rear)	kg	*28,000	22,490	*17,420	11,460	11,690	7,280	*7,500	4,850	*5,730	4,630	
		Dozer and stab down (Load over front)	kg	*12,700	*28,000	*17,420	*16,760	*12,570	10,580	*7,500	7,280	*5,730	*5,730	
	-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg	12,400	6600	6000	3500	3700	2200					
		Rear dozer down (Load over rear)	kg	27,340	14,550	13,230	7,720	8,160	4,850					
		Rear stab down (Load over rear)	kg	*13,100	7800	*8000	4100	*4700	2500					
		2 sets stab down (Load over front)	kg	*28,880	17,800	*17,640	9,040	*10,360	5,510					
		Dozer and stab down (Load over front)	kg	*13,100	10,100	*8000	5100	*4700	3200					
		2 sets stab down (Load over rear)	kg	*28,880	22,270	*17,640	11,240	*10,360	7,060					
		Dozer and stab down (Load over front)	kg	*13,100	*28,880	*17,640	16,980	*10,360	10,360					
	-4.5 m (-15.0 ft)	Rear dozer up (Load over front)	kg	9200	6500									
		Rear dozer down (Load over rear)	kg	*20,280	14,330									
		Rear stab down (Load over rear)	kg	*9200	7700									
		2 sets stab down (Load over front)	kg	*20,280	16,980									
		Dozer and stab down (Load over front)	kg	*9200	*9200									
		2 sets stab down (Load over rear)	kg	*20,280	*20,280									
		Dozer and stab down (Load over front)	kg	*9200	*9200									

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.



One-piece Boom – 2.1 m (6'11") stick

Stick 2.1 m (6'11")		Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				
													m/ft
			kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	
 Load Point Height	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg				4100	2500					
		Rear dozer down (Load over front)	kg				9,040	5,510					
		Rear dozer up (Load over rear)	kg				*4400	2900					
		Rear dozer down (Load over rear)	kg				*9,700	6,390					
		Rear stab down (Load over rear)	kg				*4400	3500					
		2 sets stab down (Load over front)	kg				*9,700	7,720					
		Dozer and stab down (Load over front)	kg				*4400	4200					
2 sets stab down (Load over rear)	kg				*9,700	*9,700							
 Load Radius Over Front or Rear	4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg			*5700	4000	2500				*2600	1800
		Rear dozer down (Load over front)	kg			*12,570	8,820	8,820	5,510			*5,730	3,970
		Rear dozer up (Load over rear)	kg			*5700	4600	*4800	2900			*2600	2000
		Rear dozer down (Load over rear)	kg			*12,570	10,140	*10,580	6,390			*5,730	4,410
		Rear stab down (Load over rear)	kg			*5700	5600	*4800	3500			*2600	2500
		2 sets stab down (Load over front)	kg			*12,570	12,350	*10,580	7,720			*5,730	5,510
		Dozer and stab down (Load over front)	kg			*5700	*5700	*4800	4200			*2600	*2600
2 sets stab down (Load over rear)	kg			*12,570	*12,570	*10,580	*10,580			*5,730	*5,730		
 Load at Maximum Reach	3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg			6100	3700	2400				*2600	1600
		Rear dozer down (Load over front)	kg			13,450	8,160	8,600	5,290			*5,730	3,530
		Rear dozer up (Load over rear)	kg			*6900	4300	*5300	2800			*2600	1800
		Rear dozer down (Load over rear)	kg			*15,210	9,480	*11,690	6,170			*5,730	3,970
		Rear stab down (Load over rear)	kg			*6900	5200	*5300	3400			*2600	2200
		2 sets stab down (Load over front)	kg			*15,210	11,460	*11,690	7,500			*5,730	4,850
		Dozer and stab down (Load over front)	kg			*6900	6400	*5300	4100			*2600	*2600
2 sets stab down (Load over rear)	kg			*15,210	*15,210	*11,690	10,800			*5,730	*5,730		
	1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg			5800	3400	3800	2700	1600		2500	1500
		Rear dozer down (Load over front)	kg			12,790	7,500	8,380	5,070	5,950	3,530	5,510	3,310
		Rear dozer up (Load over rear)	kg			*7800	4000	*5700	2600	*3900	1900	*2700	1700
		Rear dozer down (Load over rear)	kg			*17,800	8,820	*12,570	5,730	*8,600	4,190	*5,950	3,750
		Rear stab down (Load over rear)	kg			*7800	4900	5200	3200	3700	2300	*2700	2100
		2 sets stab down (Load over front)	kg			*17,800	10,800	11,460	7,060	8,160	5,070	*5,950	4,630
		Dozer and stab down (Load over front)	kg			*7800	16,540	*12,570	10,580	*8,600	7,500	*5,950	*5,950
2 sets stab down (Load over rear)	kg			*17,800	6100	*5700	3900	*3900	2800	*2700	2600		
	Ground	Rear dozer up (Load over front)	kg			5700	3300	3700	2200			2500	1500
		Rear dozer down (Load over front)	kg			12,570	7,280	8,160	4,850			5,510	3,310
		Rear dozer up (Load over rear)	kg			*7900	3800	*5700	2500			*2900	1800
		Rear dozer down (Load over rear)	kg			*17,420	8,380	*12,570	5,510			*6,390	3,970
		Rear stab down (Load over rear)	kg			*7900	4800	5100	3100			*2900	2200
		2 sets stab down (Load over front)	kg			*17,420	10,580	11,240	6,830			*6,390	4,850
		Dozer and stab down (Load over front)	kg			*17,420	16,090	*12,570	10,360			*6,390	*6,390
2 sets stab down (Load over rear)	kg			*7900	5900	*5700	3800			*2900	2700		
	-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg			*7900	6000	3200	2200			2800	1700
		Rear dozer down (Load over front)	kg			*17,420	13,230	7,060	8,160	4,850		6,170	3,750
		Rear dozer up (Load over rear)	kg			*7900	7100	*7300	3800	*5200	2500	*3400	2000
		Rear dozer down (Load over rear)	kg			*17,420	15,650	*16,090	8,380	*11,460	5,510	*7,500	4,410
		Rear stab down (Load over rear)	kg			*7900	*7900	*7300	4700	5100	3100	*3400	2400
		2 sets stab down (Load over front)	kg			*17,420	*17,420	*16,090	10,360	11,240	6,830	*7,500	5,290
		Dozer and stab down (Load over front)	kg			*7900	*7900	*7300	5900	*5200	4600	*3400	*3400
2 sets stab down (Load over rear)	kg			*17,420	*17,420	*16,090	16,090	*11,460	10,140	*7,500	*7,500		
	-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg			*7500	6100	3300					
		Rear dozer down (Load over front)	kg			*16,540	13,450	*12,350	7,280				
		Rear dozer up (Load over rear)	kg			*7500	7300	*5600	3900				
		Rear dozer down (Load over rear)	kg			*16,540	16,090	*12,350	8,600				
		Rear stab down (Load over rear)	kg			*7500	*7500	*5600	4800				
		2 sets stab down (Load over front)	kg			*16,540	*16,540	*12,350	10,580				
		Dozer and stab down (Load over front)	kg			*7500	*7500	*5600	*5600				
2 sets stab down (Load over rear)	kg			*16,540	*16,540	*12,350	*12,350						

- * Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
- All lift capacities are calculated with Heavy Lift on.
 - Oscillating axle must be locked.
 - All values are calculated at the stick-nose.

One-piece Boom – 2.4 m (7'10") stick

Stick
2.4 m (7'10")

Stick 2.4 m (7'10")		Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)						
													m/ft		
 Load Point Height  Load Radius Over Front or Rear  Load Radius Over Side  Load at Maximum Reach	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg					4100	2600						
		Rear dozer down (Load over rear)	kg					*4300	2900						
		Rear stab down (Load over rear)	kg						*9,480	6,390					
		2 sets stab down (Load over front)	kg						*4300	3600					
		Dozer and stab down (Load over front)	kg						*9,480	7,940					
			lb						*9,480	*4,300	*4,300				
			lb						*9,480	*9,480					
4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg						4100	2500			*2300	1700		
	Rear dozer down (Load over rear)	kg						*4600	2900			*5,070	3,750		
	Rear stab down (Load over rear)	kg						*10,140	6,390			*2300	1900		
	2 sets stab down (Load over front)	kg						*4600	3500			*5,070	4,190		
	Dozer and stab down (Load over front)	kg						*10,140	7,720			*2300	*2300		
		lb						*10,140	*4,600	*4,600			*5,070	*5,070	
		lb						*10,140	*10,140				*5,070	*5,070	
3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg						3900	2400			*2300	1500		
	Rear dozer down (Load over rear)	kg						6200	3700			*5,070	3,910		
	Rear stab down (Load over rear)	kg						13,670	8,160			*2300	1700		
	2 sets stab down (Load over front)	kg						*6600	4300			*5,070	3,750		
	Dozer and stab down (Load over front)	kg						*14,550	9,480			*2300	2100		
		lb						*14,550	5300	*5100			*2300	*2300	
		lb						*14,550	11,690	*11,240	7,500		*5,070	*5,070	
1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg						3800	2300			*2300	1400		
	Rear dozer down (Load over rear)	kg						5800	3400			*2400	1600		
	Rear stab down (Load over rear)	kg						12,790	7,500			*5,290	4,410		
	2 sets stab down (Load over front)	kg						*7600	4000			*2400	2000		
	Dozer and stab down (Load over front)	kg						*16,760	8,820			*5,290	*5,290		
		lb						*16,760	5000	5200			*2400	*2400	
		lb						*16,760	11,020	11,460	7,060		*5,290	*5,290	
Ground	Rear dozer up (Load over front)	kg						3700	2200			*2300	1400		
	Rear dozer down (Load over rear)	kg						5600	3200			*2400	1600		
	Rear stab down (Load over rear)	kg						*8,820	5,600			*5,730	4,630		
	2 sets stab down (Load over front)	kg						*4000	*4000			*2600	2100		
	Dozer and stab down (Load over front)	kg						*8,820	*8,820	*17,420		*5,730	*5,730		
		lb						*8,820	*8,820	*17,420	10,580		*5,730	*5,730	
		lb						*8,820	*8,820	*17,420	16,090		*5,730	*5,730	
-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg						3600	2100			*2300	1600		
	Rear dozer down (Load over rear)	kg						5900	3600			*3000	1800		
	Rear stab down (Load over rear)	kg						*7700	7000			*6,610	5,070		
	2 sets stab down (Load over front)	kg						*16,980	15,430			*3000	*3000		
	Dozer and stab down (Load over front)	kg						*16,980	*16,980	*16,310		*6,610	*6,610		
		lb						*16,980	*16,980	*16,310	10,360		*6,610	*6,610	
		lb						*16,980	*16,980	*16,310	15,870		*6,610	*6,610	
-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg						6000	3300						
	Rear dozer down (Load over rear)	kg						8300	5600						
	Rear stab down (Load over rear)	kg						*18,300	13,230						
	2 sets stab down (Load over front)	kg						*8300	*8300						
	Dozer and stab down (Load over front)	kg						*18,300	*18,300	*13,230					
		lb						*18,300	*18,300	*13,230	10,580				
		lb						*18,300	*18,300	*13,230	13,230				

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

One-piece Boom – 2.6 m (8'6") stick


Stick
2.6 m (8'6")

Stick 2.6 m (8'6")	Undercarriage configuration		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		m/ft		
			kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	
 Load Point Height Load Radius Over Front or Rear Load Radius Over Side Load at Maximum Reach	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg				4100	2600					
		Rear dozer down (Load over front)	lb				9,040	5,730					
		Rear dozer down (Load over rear)	kg				*4200	3000					
		Rear dozer down (Load over rear)	lb				*9,260	6,610					
		Rear stab down (Load over rear)	kg				*4200	3600					
		2 sets stab down (Load over front)	lb				*9,260	7,940					
		Dozer and stab down (Load over front)	kg				*4200	*4200					
	lb				*9,260	*9,260							
4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg					4100	2500	*2500	1700	*2100	1600	
	Rear dozer down (Load over front)	lb					9,040	5,510	*5,510	3,750	*4,630	3,530	
	Rear dozer down (Load over rear)	kg					*4500	2900	*2500	2000	*2100	1800	
	Rear dozer down (Load over rear)	lb					*9,920	6,390	*5,510	4,410	*4,630	3,970	
	Rear stab down (Load over rear)	kg					*4500	3500	*2500	2400	*2100	*2100	
	2 sets stab down (Load over rear)	lb					*9,920	7,720	*5,510	5,290	*4,630	*4,630	
	Dozer and stab down (Load over front)	kg					*4500	*4500	*2500	*2500	*2100	*2100	
	lb					*9,920	*9,920	*5,510	*5,510	*4,630	*4,630		
	kg												
	lb												
3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg				6200	3800	3900	2400	1700	*2100	1400	
	Rear dozer down (Load over front)	lb				13,670	8,380	8,600	5,290	5,950	3,750	*4,630	
	Rear dozer down (Load over rear)	kg				*6400	4300	*5000	2800	4200	1900	*2100	
	Rear dozer down (Load over rear)	lb				*14,110	9,480	*11,020	6,170	9,260	4,190	*4,630	
	Rear stab down (Load over rear)	kg				*6400	5300	*5000	3400	3700	2400	*2100	
	2 sets stab down (Load over rear)	lb				*14,110	11,690	*11,020	7,500	8,160	5,290	*4,630	
	Dozer and stab down (Load over front)	kg				*6400	*6400	*5000	4900	*4200	3400	*2100	
	lb				*14,110	*14,110	*11,020	10,800	*9,260	7,500	*4,630	*4,630	
	kg												
	lb												
1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg				5900	3500	3800	2700	1600	*2200	1300	
	Rear dozer down (Load over front)	lb				13,010	7,720	8,380	5,070	5,950	3,530	*4,850	
	Rear dozer down (Load over rear)	kg				*7500	4000	*5500	2600	4100	1900	*2200	
	Rear dozer down (Load over rear)	lb				*16,540	8,820	*12,130	5,730	9,040	4,190	*4,850	
	Rear stab down (Load over rear)	kg				*7500	5000	5200	3200	3700	2300	*2200	
	2 sets stab down (Load over rear)	lb				*16,540	11,020	11,460	7,060	8,160	5,070	*4,850	
	Dozer and stab down (Load over front)	kg				*7500	*7500	*5500	4800	*4400	3400	*2200	
	lb				*16,540	*16,540	*12,130	10,580	*9,700	7,500	*4,850	*4,850	
	kg												
	lb												
Ground	Rear dozer up (Load over front)	kg	*4200	*4200	3300	3700	2200	2600	1600	2300	1400		
	Rear dozer down (Load over front)	lb	*9,260	*9,260	12,570	7,280	8,160	4,850	5,730	3,530	5,070		
	Rear dozer down (Load over rear)	kg	*4200	*4200	*7900	3800	*5700	2500	4000	1800	*2400		
	Rear dozer down (Load over rear)	lb	*9,260	*9,260	*17,420	8,380	*12,570	5,510	8,820	3,970	*5,290		
	Rear stab down (Load over rear)	kg	*4200	*4200	*7900	4800	5100	3100	3600	2300	*2400		
	2 sets stab down (Load over rear)	lb	*9,260	*9,260	*17,420	10,580	11,240	6,830	7,940	5,070	*5,290		
	Dozer and stab down (Load over front)	kg	*4200	*4200	*7900	7300	*5700	4600	*4400	3300	*2400		
	lb	*9,260	*9,260	*17,420	16,090	*12,570	10,140	*9,700	7,280	*5,290	*5,290		
	kg												
	lb												
-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg	*7500	5900	5600	3200	3600	2100			2500	1500	
	Rear dozer down (Load over front)	lb	*16,540	13,010	12,350	7,060	7,940	4,630			5,510	3,310	
	Rear dozer down (Load over rear)	kg	*7500	7000	*7600	3700	*5500	2500			*2800	1800	
	Rear dozer down (Load over rear)	lb	*16,540	15,430	*16,760	8,160	*12,130	5,510			*6,170	3,970	
	Rear stab down (Load over rear)	kg	*7500	*7500	*7600	4700	5000	3100			*2800	2200	
	2 sets stab down (Load over rear)	lb	*16,540	*16,540	*16,760	10,360	11,020	6,830			*6,170	4,850	
	Dozer and stab down (Load over front)	kg	*7500	*7500	*7600	7200	*5500	4600			*2800	*2800	
	lb	*16,540	*16,540	*16,760	15,870	*12,130	10,140			*6,170	*6,170		
	kg												
	lb												
-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg	*8800	6000	5600	3200	3700	2200					
	Rear dozer down (Load over front)	lb	*19,400	13,230	12,350	7,060	8,160	4,850					
	Rear dozer down (Load over rear)	kg	*8800	7200	*6300	3800	*4300	2500					
	Rear dozer down (Load over rear)	lb	*19,400	15,870	*13,890	8,380	*9,480	5,510					
	Rear stab down (Load over rear)	kg	*8800	*8800	*6300	4700	*4300	3100					
	2 sets stab down (Load over rear)	lb	*19,400	*19,400	*13,890	10,360	*9,480	6,830					
	Dozer and stab down (Load over front)	kg	*8800	*8800	*6300	5900	*4300	3800					
	lb	*19,400	*19,400	*13,890	13,010	*9,480	8,380						

- * Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

Offset Boom – 2.1 m (6'11") stick

Stick
2.1 m (6'11")

Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		m/ft				
													
 Load Point Height  Load Radius Over Front or Rear  Load Radius Over Side  Load at Maximum Reach	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg		*5300	4200	4100	2500					
		lb		*11,690	9,260	9,040	5,510						
		Rear dozer down (Load over rear)	kg		*5300	4800	*4700	2800					
		lb			*11,690	10,580	*10,360	6,170					
		Rear stab down (Load over rear)	kg		*5300	*5300	*4700	3500					
		lb			*11,690	*11,690	*10,360	7,720					
		2 sets stab down (Load over front)	kg		*5300	*5300	*4700	*4700					
		lb			*11,690	*11,690	*10,360	*10,360					
Dozer and stab down (Load over front)	kg		*5300	*5300	*4700	4200							
lb			*11,690	*11,690	*10,360	9,260							
Rear dozer up (Load over front)	4.5 m (15.0 ft)	kg	*6800	6800	4100	2500			*2300	1500			
		lb	*14,990	14,990	*13,010	9,040	9,040	5,510		*5,070	3,310		
		Rear dozer down (Load over rear)	kg	*6800	*6800	*5900	4700	*4800	2900		*2300	1800	
		lb	*14,990	*14,990	*13,010	10,360	*10,580	6,390		*5,070	3,970		
		Rear stab down (Load over rear)	kg	*6800	*6800	*5900	5600	*4800	3600		*2300	2200	7.69 m (25'3")
		lb	*14,990	*14,990	*13,010	12,350	*10,580	7,940		*5,070	4,850		
		2 sets stab down (Load over front)	kg	*6800	*6800	*5900	*5900	*4800	*4800		*2300	*2300	
		lb	*14,990	*14,990	*13,010	*13,010	*10,580	*10,580		*5,070	*5,070		
Dozer and stab down (Load over front)	kg	*6800	*6800	*5900	*4800	4200		*2300	*2300				
lb	*14,990	*14,990	*13,010	*13,010	*10,580	9,260		*5,070	*5,070				
Rear dozer up (Load over front)	3.0 m (10.0 ft)	kg	*7600	7100	3900	4000	2500	2600	1500	*2300	1300		
		lb	*16,760	15,650	*13,450	8,600	8,820	5,510	5,730	3,310	*5,070	2,870	
		Rear dozer down (Load over rear)	kg	*7600	*7600	*6800	4500	*5100	2900	4100	1800	*2300	1600
		lb	*16,760	*16,760	*14,990	9,920	*11,240	6,390	9,040	3,970	*5,070	3,530	
		Rear stab down (Load over rear)	kg	*7600	*7600	*6800	5400	*5100	3600	3600	2200	*2300	2000
		lb	*16,760	*16,760	*14,990	11,910	*11,240	7,940	7,940	4,850	*5,070	4,410	
		2 sets stab down (Load over front)	kg	*7600	*7600	*6800	*6800	*5100	4900	*4200	3300	*2300	*2300
		lb	*16,760	*16,760	*14,990	*14,990	*11,240	10,800	*9,260	7,280	*5,070	*5,070	
Dozer and stab down (Load over front)	kg	*7600	*7600	*6800	6300	*5100	4200	*4200	2700	*2300	*2300		
lb	*16,760	*16,760	*14,990	13,890	*11,240	9,260	*9,260	5,950	*5,070	*5,070			
Rear dozer up (Load over front)	1.5 m (5.0 ft)	kg	*9700	6900	6100	3900	4000	2400	1400	2300	1200		
		lb	*21,390	15,210	13,450	8,600	8,820	5,290	5,730	3,090	4,850	2,650	
		Rear dozer down (Load over rear)	kg	*9700	8100	*7500	4500	*5400	2800	4000	1700	*2300	1500
		lb	*21,390	17,860	*16,540	9,920	*11,910	6,170	8,820	3,750	*5,070	3,310	
		Rear stab down (Load over rear)	kg	*9700	*9700	*7500	5300	5200	3500	3600	2200	*2300	1900
		lb	*21,390	*21,390	*16,540	11,690	11,460	7,720	7,940	4,850	*5,070	4,190	
		2 sets stab down (Load over front)	kg	*9700	*9700	*7500	*7300	*5400	*4900	*4200	3300	*2300	*2300
		lb	*21,390	*21,390	*16,540	*16,090	*11,910	*10,800	*9,260	7,280	*5,070	*5,070	
Dozer and stab down (Load over front)	kg	*9700	*9700	*7500	6300	*5400	4200	*4200	2700	*2300	2300		
lb	*21,390	*21,390	*16,540	13,890	*11,910	9,260	*9,260	5,950	*5,070	5,070			
Ground	Ground	kg	*11 500	6400	6200	3700	3800	2300	2500	1400	2300	1300	
		lb	*25,353	14,110	13,670	8,160	8,380	5,070	5,510	3,090	5,070	2,870	
		Rear dozer down (Load over rear)	kg	*11 500	7700	*7600	4300	*5500	2600	*3800	1600	*2500	1500
		lb	*25,353	16,980	*16,760	9,480	*12,130	5,730	*8,380	3,530	*5,510	3,310	
		Rear stab down (Load over rear)	kg	*11 500	10 000	*7600	5300	5300	3300	3500	2100	*2500	1900
		lb	*25,353	22,050	*16,760	11,690	11,690	7,280	7,720	4,630	*5,510	4,190	
		2 sets stab down (Load over front)	kg	*11 500	*11 500	*7600	*7400	*5500	4800	*3800	3200	*2500	*2500
		lb	*25,353	*25,353	*16,760	*16,310	*12,130	10,580	*8,380	7,060	*5,510	*5,510	
Dozer and stab down (Load over front)	kg	*11 500	*11 500	*7600	6300	*5500	4000	*3800	2600	*2500	2400		
lb	*25,353	*25,353	*16,760	13,890	*12,130	8,820	*8,380	5,730	*5,510	5,290			
Rear dozer up (Load over front)	-1.5 m (-5.0 ft)	kg	12 100	6400	6000	3500	3600	2100		2600	1400		
		lb	26,680	14,110	13,230	7,720	7,940	4,630		5,730	3,090		
		Rear dozer down (Load over rear)	kg	*12 400	7600	*7700	4100	*5500	2400		*2800	1700	
		lb	*27,340	16,760	*16,980	9,040	*12,130	5,290		*6,170	3,750		
		Rear stab down (Load over rear)	kg	*12 400	9900	*7700	5100	5100	3100		*2800	2200	7.45 m (24'5")
		lb	*27,340	21,830	*16,980	11,240	11,240	6,830		*6,170	4,850		
		2 sets stab down (Load over front)	kg	*12 400	*12 400	*7700	7700	*5500	4600		*2800	*2800	
		lb	*27,340	*27,340	*16,980	16,980	*12,130	10,140		*6,170	*6,170		
Dozer and stab down (Load over front)	kg	*12 400	12 300	*7700	6300	*5500	3800		*2800	2700			
lb	*27,340	27,120	*16,980	13,890	*12,130	8,380		*6,170	5,950				
Rear dozer up (Load over front)	-3.0 m (-10.0 ft)	kg	12 300	6400	5800	3300							
		lb	27,120	14,110	12,790	7,280							
		Rear dozer down (Load over rear)	kg	*12 700	7700	*7200	3900						
		lb	*28,000	16,980	*15,870	8,600							
		Rear stab down (Load over rear)	kg	*12 700	10 000	*7200	4900						
		lb	*28,000	22,050	*15,870	10,800							
		2 sets stab down (Load over front)	kg	*12 700	*12 700	*7200	*7200						
		lb	*28,000	*28,000	*15,870	*15,870							
Dozer and stab down (Load over front)	kg	*12 700	*12 700	*7200	6000								
lb	*28,000	*28,000	*15,870	13,230									

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

Offset Boom – 2.4 m (7'10") stick

Stick
2.4 m (7'10")




Load Point
Height



Load Radius
Over Front
or Rear



Load Radius
Over Side





Load at
Maximum Reach

Stick 2.4 m (7'10")	Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		m/ft		
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	
6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg		*4800	4200	4100	2500					
	Rear dozer down (Load over front)	lb		*10,580	9,260	9,040	5,510					
	Rear dozer down (Load over rear)	kg		*4800	*4800	*4400	2900					
	Rear dozer down (Load over rear)	lb		*10,580	*10,580	*9,700	6,390					
	Rear stab down (Load over rear)	kg		*4800	*4800	*4400	3600					
	2 sets stab down (Load over front)	lb		*10,580	*10,580	*9,700	7,940					
	Dozer and stab down (Load over front)	kg		*4800	*4800	*4400	4300					
		lb		*10,580	*10,580	*9,700	9,480					
4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg	*5200	*5200	4100	2600	2700	1500	*2000	1400		
	Rear dozer down (Load over front)	lb	*11,460	*11,460	*12,350	9,040	9,040	5,730	5,950	3,310	*4,410	3,090
	Rear dozer down (Load over rear)	kg	*5200	*5200	*5600	4700	*4600	3000	*2800	1800	*2000	1700
	Rear dozer down (Load over rear)	lb	*11,460	*11,460	*12,350	10,360	*10,140	6,610	*6,170	3,970	*4,410	3,750
	Rear stab down (Load over rear)	kg	*5200	*5200	*5600	*5600	*4600	3600	*2800	2300	*2000	*2000
	2 sets stab down (Load over front)	lb	*11,460	*11,460	*12,350	*12,350	*10,140	7,940	*6,170	5,070	*4,410	*4,410
	Dozer and stab down (Load over front)	kg	*5200	*5200	*5600	*5600	*4600	4200	*2800	2800	*2000	*2000
	lb	*11,460	*11,460	*12,350	*12,350	*10,140	9,260	*6,170	6,170	*4,410	*4,410	
3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg	*7700	7200	6200	3900	4000	2600	2700	1500	*2000	1200
	Rear dozer down (Load over front)	lb	*16,980	15,870	13,670	8,600	8,820	5,730	5,950	3,310	*4,410	2,650
	Rear dozer down (Load over rear)	kg	*7700	*7700	*6600	4500	*5000	3000	*4100	1800	*2000	1500
	Rear dozer down (Load over rear)	lb	*16,980	*16,980	*14,550	9,920	11,020	6,610	*9,040	3,970	*4,410	3,310
	Rear stab down (Load over rear)	kg	*7700	*7700	*6600	5400	*5000	*3500	3700	2300	*2000	1900
	2 sets stab down (Load over front)	lb	*16,980	*16,980	*14,550	11,910	11,020	*7,720	8,160	5,070	*4,410	4,190
	Dozer and stab down (Load over front)	kg	*7700	*7700	*6600	6400	*5000	4200	*4100	2800	*2000	*2000
	lb	*16,980	*16,980	*14,550	14,110	11,020	9,260	*9,040	6,170	*4,410	*4,410	
1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg	*9800	7000	6000	3900	4000	2500	2600	1500	*2100	1200
	Rear dozer down (Load over front)	lb	*21,610	15,430	13,230	8,600	8,820	5,510	5,730	3,310	*4,630	2,650
	Rear dozer down (Load over rear)	kg	*9800	8000	*7400	4400	*5300	2900	4100	1700	*2100	1400
	Rear dozer down (Load over rear)	lb	*21,610	17,640	*16,310	9,700	*11,690	6,390	9,040	3,750	*4,630	3,090
	Rear stab down (Load over rear)	kg	*9800	*9800	*7400	5300	5200	3500	3600	2200	*2100	1800
	2 sets stab down (Load over front)	lb	*21,610	*21,610	*16,310	11,690	11,460	7,720	7,940	4,850	*4,630	3,970
	Dozer and stab down (Load over front)	kg	*9800	*9800	*7400	6200	*5300	4200	*4200	2700	*2100	*2100
	lb	*21,610	*21,610	*16,310	13,670	*11,690	9,260	*9,260	5,950	*4,630	*4,630	
Ground	Rear dozer up (Load over front)	kg	*11,200	6700	6100	3700	3900	2300	2100	1400	2200	1300
	Rear dozer down (Load over front)	lb	*24,690	14,770	13,450	8,160	8,600	5,070	5,510	3,090	4,850	2,650
	Rear dozer down (Load over rear)	kg	*11,200	8000	*7500	4300	*5400	2700	4000	1700	*2200	1400
	Rear dozer down (Load over rear)	lb	*24,690	17,640	*16,540	9,480	*11,910	5,950	8,820	3,750	*4,850	3,090
	Rear stab down (Load over rear)	kg	*11,200	9900	*7500	5300	5200	3300	3500	2100	*2200	1800
	2 sets stab down (Load over front)	lb	*24,690	21,830	*16,540	11,690	11,460	7,280	7,720	4,630	*4,850	3,970
	Dozer and stab down (Load over front)	kg	*11,200	*11,200	*7500	7300	*5400	4900	*4100	3200	*2200	*2200
	lb	*24,690	*24,690	*16,540	16,090	*11,910	10,800	*9,040	7,060	*4,850	*4,850	
-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg	12,000	6400	6000	3500	3700	2100	2100	1400	2400	1300
	Rear dozer down (Load over front)	lb	26,460	14,110	13,230	7,720	8,160	4,630	4,630	3,090	5,290	2,870
	Rear dozer down (Load over rear)	kg	*12,300	7600	*7600	4100	*5500	2500	4000	1700	*2500	1600
	Rear dozer down (Load over rear)	lb	*27,120	16,760	*16,760	9,040	*12,130	5,510	5,510	3,750	*5,510	3,530
	Rear stab down (Load over rear)	kg	*12,300	9900	*7600	5100	5200	3100	3100	2100	*2500	2000
	2 sets stab down (Load over front)	lb	*27,120	21,830	*16,760	11,240	11,460	6,830	6,830	4,850	*5,510	4,410
	Dozer and stab down (Load over front)	kg	*12,300	*12,300	*7600	*7500	*5500	4700	4700	3200	*2500	*2500
	lb	*27,120	*27,120	*16,760	*16,540	*12,130	10,360	10,360	7,060	*5,510	*5,510	
-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg	12,200	6300	5800	3300	3600	2000	2100	1400	2400	1300
	Rear dozer down (Load over front)	lb	26,900	13,890	12,790	7,280	7,940	4,410	4,410	3,090	5,290	2,870
	Rear dozer down (Load over rear)	kg	*12,800	7600	*7600	3900	*4000	2400	4000	1700	*2500	1600
	Rear dozer down (Load over rear)	lb	*28,220	16,760	*16,760	8,600	*8,820	5,290	5,290	3,750	*5,510	3,530
	Rear stab down (Load over rear)	kg	*12,800	9900	*7600	4900	*4000	3000	3000	2100	*2500	2000
	2 sets stab down (Load over front)	lb	*28,220	21,830	*16,760	10,800	*8,820	6,610	6,610	4,850	*5,510	4,410
	Dozer and stab down (Load over front)	kg	*12,800	*12,800	*7600	7500	*4000	*4000	3700	3700	*2500	*2500
	lb	*28,220	28,000	*16,760	13,230	*8,820	8,160	8,160	5,950	*5,510	*5,510	

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

VA Boom Industrial Stick – 3.1 m (10'2") stick

Industrial Stick 3.1 m (10'2")	Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)				m/ft		
														
 Load Point Height  Load Radius Over Front or Rear  Load Radius Over Side  Load at Maximum Reach	6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg					*4600	3100					
		Rear dozer down (Load over rear)	kg					*4600	3400					
		Rear stab down (Load over rear)	kg						*10,140	7,500				
		2 sets stab down (Load over front)	kg						*4600	4000				
		Dozer and stab down (Load over front)	kg						*10,140	*10,140				
		Dozer and stab down (Load over front)	lb						*4600	*4600				
	4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg			*5100	4500	4500	3000	3200	2100	2900	1900	7.88 m (25'10")
		Rear dozer down (Load over rear)	kg			*11,240	9,920	9,920	6,610	7,060	4,630	6,390	4,190	
		Rear stab down (Load over rear)	kg			*5100	*5100	*4900	3400	*4200	2400	*3200	2100	
		2 sets stab down (Load over front)	kg			*11,240	*11,240	*10,800	7,500	*9,260	5,290	*7,060	4,630	
		Dozer and stab down (Load over front)	kg			*5100	*5100	*4900	4000	*4200	2800	*3200	2600	
		Dozer and stab down (Load over front)	lb			*11,240	*11,240	*10,800	8,820	*9,260	6,170	*7,060	5,730	
3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg			*8000	7700	4400	4500	3000	2100	2700	1700	8.28 m (27'2")	
	Rear dozer down (Load over rear)	kg			*17,640	16,980	14,770	9,700	9,920	6,610	7,060	4,630		
	Rear stab down (Load over rear)	kg			*8000	8000	*6800	4900	*5400	3400	*4600	2400		
	2 sets stab down (Load over front)	kg			*17,640	*17,640	*14,990	13,010	*11,910	8,600	9,260	6,170		
	Dozer and stab down (Load over front)	kg			*8000	*8000	*6800	5900	*5400	3900	4200	2800		
	Dozer and stab down (Load over front)	lb			*17,640	*17,640	*14,990	*14,990	*11,910	*11,910	*11,690	*10,140		8,600
1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg			*10 600	7500	6500	4300	4400	3000	2000	2700	8.36 m (27'5")	
	Rear dozer down (Load over rear)	kg			*23,370	16,540	14,330	9,480	9,700	6,610	6,830	4,410		
	Rear stab down (Load over rear)	kg			*10 600	8700	*7900	4900	*5900	3300	4600	2300		
	2 sets stab down (Load over front)	kg			*23,370	19,180	*17,420	10,800	*13,010	7,280	10,140	5,070		
	Dozer and stab down (Load over front)	kg			*10 600	*10 600	*7900	5800	5700	3900	4100	2700		
	Dozer and stab down (Load over front)	lb			*23,370	*23,370	*17,420	12,790	12,570	8,600	9,040	5,950		
Ground	Rear dozer up (Load over front)	kg			*11 900	7500	6600	4200	4400	2900	3100	2000	8.17 m (26'10")	
	Rear dozer down (Load over rear)	kg			*26,240	16,540	14,550	9,260	9,700	6,390	6,830	4,410		
	Rear stab down (Load over rear)	kg			*11 900	8600	*8300	4800	*6100	3200	4500	2200		
	2 sets stab down (Load over front)	kg			*26,240	18,960	*18,300	10,580	*13,450	7,060	9,920	4,850		
	Dozer and stab down (Load over front)	kg			*11 900	10 600	*8300	5700	5700	3900	4000	2700		
	Dozer and stab down (Load over front)	lb			*26,240	*26,240	*18,300	*17,420	*13,450	*11,690	*10,580	8,380		
-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg			12 600	7100	6600	4000	4200	2700	3000	1900	8.67 m (28'5")	
	Rear dozer down (Load over rear)	kg			27,780	15,650	14,550	8,820	9,260	5,950	6,610	4,190		
	Rear stab down (Load over rear)	kg			*13 200	8300	*8300	4600	*6100	3000	*4300	2100		
	2 sets stab down (Load over front)	kg			*29,100	18,300	*18,300	10,140	*13,450	6,610	*9,480	4,630		
	Dozer and stab down (Load over front)	kg			*13 200	10 700	*8300	5600	5700	3700	4000	2600		
	Dozer and stab down (Load over front)	lb			*29,100	*29,100	*18,300	*17,640	*13,450	11,460	*9,480	8,160		
-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg			12 800	7000	6400	3900	4100	2500	3100	2000		
	Rear dozer down (Load over rear)	kg			28,220	15,430	14,110	8,600	9,040	5,510				
	Rear stab down (Load over rear)	kg			*13 400	8200	*8600	4400	*5600	2900				
	2 sets stab down (Load over front)	kg			*29,540	18,080	*18,960	9,700	*12,350	6,390				
	Dozer and stab down (Load over front)	kg			*13 400	10 500	*8600	5400	5500	3500				
	Dozer and stab down (Load over front)	lb			*29,540	*29,540	*18,960	17,640	*12,350	11,240				
-4.5 m (-15.0 ft)	Rear dozer up (Load over front)	kg			*11 000	6800	*5500	3700						
	Rear dozer down (Load over rear)	kg			*24,250	14,990	*12,130	8,160						
	Rear stab down (Load over rear)	kg			*11 000	8000	*5500	4300						
	2 sets stab down (Load over front)	kg			*24,250	17,640	*12,130	9,480						
	Dozer and stab down (Load over front)	kg			*11 000	10 300	*5500	5300						
	Dozer and stab down (Load over front)	lb			*24,250	*24,250	*12,130	11,690						

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

One-piece Boom Industrial Stick – 3.1 m (10'2") stick

Industrial Stick 3.1 m (10'2")




Load Point
Height



Load Radius
Over Front
or Rear



Load Radius
Over Side



Load at
Maximum Reach

Industrial Stick 3.1 m (10'2")	Undercarriage configuration	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		m/ft	
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
6.0 m (20.0 ft)	Rear dozer up (Load over front)	kg				*4500	3000				
	Rear dozer down (Load over rear)	kg				*9,920	6,610				
	Rear stab down (Load over rear)	kg				*4500	3400				
	2 sets stab down (Load over front)	kg				*9,920	7,500				
	Dozer and stab down (Load over front)	kg				*4500	4000				
	Dozer and stab down (Load over front)	lb				*9,920	8,820				
4.5 m (15.0 ft)	Rear dozer up (Load over front)	kg				4500	2900	3200	2100	3100	2000
	Rear dozer down (Load over rear)	kg				9,920	6,390	7,060	4,630	6,830	4,410
	Rear stab down (Load over rear)	kg				*4700	3300	*3600	2400	*3200	2300
	2 sets stab down (Load over front)	kg				*10,360	7,280	*7,940	5,290	*7,060	5,070
	Dozer and stab down (Load over front)	kg				*4700	3900	*3600	2800	*3200	2700
	Dozer and stab down (Load over front)	lb				*10,360	8,600	*7,940	6,170	*7,060	5,950
3.0 m (10.0 ft)	Rear dozer up (Load over front)	kg				*6500	4200	4300	2800	3100	2800
	Rear dozer down (Load over rear)	kg				*14,330	9,260	9,480	6,170	6,830	4,190
	Rear stab down (Load over rear)	kg				*6500	4800	*5300	3200	*4600	2300
	2 sets stab down (Load over front)	kg				*14,330	10,580	*11,690	7,060	*10,140	5,070
	Dozer and stab down (Load over front)	kg				*6500	5800	*5300	3800	4100	2800
	Dozer and stab down (Load over front)	lb				*14,330	12,790	*11,690	8,380	9,040	6,170
1.5 m (5.0 ft)	Rear dozer up (Load over front)	kg				*7800	3900	4200	2700	3100	2000
	Rear dozer down (Load over rear)	kg				*17,800	8,600	9,260	5,950	6,830	4,410
	Rear stab down (Load over rear)	kg				*7800	4500	*5800	3000	4500	2300
	2 sets stab down (Load over front)	kg				*17,800	9,920	*12,790	6,610	9,920	5,070
	Dozer and stab down (Load over front)	kg				*7800	5400	5600	3700	4000	2700
	Dozer and stab down (Load over front)	lb				*17,800	11,910	12,350	8,160	8,820	5,950
Ground	Rear dozer up (Load over front)	kg	*5800	*5800	6100	3700	4100	2600	3000	1900	2800
	Rear dozer down (Load over rear)	kg	*12,790	*12,790	13,450	8,160	9,040	5,730	6,610	4,190	6,170
	Rear stab down (Load over rear)	kg	*5800	*5800	*8400	4300	*6200	2900	4400	2200	*3800
	2 sets stab down (Load over front)	kg	*12,790	*12,790	*18,520	9,480	*13,670	6,390	9,700	4,850	*8,380
	Dozer and stab down (Load over front)	kg	*5800	*5800	*8400	5200	5500	3500	4000	2600	3700
	Dozer and stab down (Load over front)	lb	*12,790	*12,790	*18,520	11,460	12,130	7,720	8,820	5,730	8,160
-1.5 m (-5.0 ft)	Rear dozer up (Load over front)	kg	*8500	6400	6000	3600	4000	2500			2000
	Rear dozer down (Load over rear)	kg	*18,740	14,110	13,230	7,940	8,820	5,510			4,410
	Rear stab down (Load over rear)	kg	*8500	7600	*8200	4200	*6000	2900			4500
	2 sets stab down (Load over front)	kg	*18,740	16,760	*18,080	9,260	*13,230	6,390			9,920
	Dozer and stab down (Load over front)	kg	*8500	*8500	*8200	5100	5400	3500			4000
	Dozer and stab down (Load over front)	lb	*18,740	*18,740	*18,080	11,240	11,910	7,720			8,820
-3.0 m (-10.0 ft)	Rear dozer up (Load over front)	kg	*10,000	6500	6000	3600	4000	2500			
	Rear dozer down (Load over rear)	kg	*22,050	14,330	13,230	7,940	8,820	5,510			
	Rear stab down (Load over rear)	kg	*10,000	7600	*7100	4200	*5100	2900			
	2 sets stab down (Load over front)	kg	*22,050	16,760	*15,650	9,260	*11,240	6,390			
	Dozer and stab down (Load over front)	kg	*10,000	9800	*7100	5100	*5100	3500			
	Dozer and stab down (Load over front)	lb	*22,050	21,610	*15,650	11,240	*11,240	7,720			
-4.5 m (-15.0 ft)	Rear dozer up (Load over front)	kg	*6500	*6500	*4600	3800					
	Rear dozer down (Load over rear)	kg	*14,330	*14,330	*10,140	8,380					
	Rear stab down (Load over rear)	kg	*6500	*6500	*4600	4300					
	2 sets stab down (Load over front)	kg	*14,330	*14,330	*10,140	9,480					
	Dozer and stab down (Load over front)	kg	*6500	*6500	*4600	4600					
	Dozer and stab down (Load over front)	lb	*14,330	*14,330	*10,140	10,140					

* Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard JISO 10567. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.

- All lift capacities are calculated with Heavy Lift on.
- Oscillating axle must be locked.
- All values are calculated at the stick-nose.

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for details.

Operator Station

- Adjustable armrests
- Ash tray with cigarette lighter (24 volt)
- Beverage cup/can holder
- Bolt-on FOGS capability
- Bottle holder
- Coat hook
- Floor mat, washable, with storage compartment
- Fully adjustable suspension seat
- Heater and defroster
- Joysticks
- Laminated front windshield
- Left side console, tiltable, with lock out for all controls
- Literature compartment behind seat
- Literature holder in right console
- Mobile phone holder
- Monitor and gauges with full color graphical display
 - Information and warning messages in local language
 - Gauges for fuel level, engine coolant and hydraulic oil temperature
 - Filters/fluids change interval, working hour
 - Indicators for headlights, turning signal, low fuel, engine dial setting
 - Clock with 10 day backup battery
- Parking brake
- Parallel mounted top and bottom wiper and washer
- Positive filtered ventilation, pressurized cab
- Power supply, 12V-7A
- Rear window, emergency exit
- Retractable seat belt
- Seat with adjustable mechanical suspension
- Skylight
- Sliding door windows
- Steering column, tiltable
- Storage area suitable for a lunch box
- Sunshade for windshield and skylight

Electrical

- Alternator, 75 amp
- Lights
 - Boom working light
 - Cab interior
 - Roading lights (two front, two rear)
- Maintenance free batteries
- Main shut-off switch
- Signal/warning horn

Engine

- Automatic engine speed control
- Automatic starting aid
- Cat C4.4 with ACERT™ Technology U.S. EPA Tier 3
- Fuel filter
- Fuel/water separator with level indicator
- Muffler

Hydraulics

- Cat XT™-6 ES hoses
- Heavy lift mode
- Load-Sensing Plus hydraulic system
- Manual work modes (economy, power)
- Oil cooler
- Separate swing pump
- Stick regeneration circuit

Undercarriage

- Heavy-Duty axles with advanced travel motor with adjustable braking force
- Oscillating front axle with remote greasing
- Pin-on design preparation for dozer blade and outriggers
- Tires, 10.00-20 16PR, dual
- Tool box in undercarriage
- Two-piece drive shaft
- Two-speed transmission with manual and automatic gear shifting
- Undercarriage storage box

Other Equipment

- Automatic swing brake
- Caterpillar Datalink and Electronic Technician capability
- Caterpillar Product Link
- Counterweight 3500 kg (7,716 lb)
- Door locks and caps locks with Caterpillar one-key security system
- Mirrors, frame and cab
- S•O•SSM quick sampling valves for engine oil, hydraulic oil and coolant

Optional Equipment

Optional equipment may vary. Consult your Caterpillar dealer for details.

Auxiliary Controls and Lines

- Auxiliary boom and stick lines
- Anti-drift valves for bucket, stick, VA Boom and tool control/multi-function circuits

Basic control circuits:

Single action

- One-way, high pressure circuit, for hammering application

Medium pressure

- Two-way, medium pressure circuit, for rotating or tilting of work tools

Tool control/multi function

- One/two-way high pressure for hammer application or opening and closing of a work tool

- Programmable flow and pressure for up to 10 work tools – selection via monitor

Second high pressure

- Additional two-way, high pressure circuit, for tools requiring a second high or medium pressure function

Quick coupler control

- Biodegradable hydraulic oil (synthetic ester based)

- Lowering control devices for boom and stick

Front Linkage

Booms

- One-piece boom, 5.05 m (16 ft 6 in)

- Offset boom, 5.2 m (17 ft 1 in)

- Variable adjustable boom (two piece), 5.20 m (17 ft 1 in)

- Bucket linkage with diverter valve

Sticks

- 2.1 m (6 ft 11 in) stick

- 2.4 m (7 ft 10 in) stick

- 2.6 m (8 ft 6 in) stick

- 3.1 m (10 ft 2 in) Industrial stick with drop nose

Electrical

- Back-up alarm with three selectable modes

- Heavy-duty maintenance free batteries

- Refueling pump

- Roading lights, rear consisting of long life LED modules

- Rotating beacon on cab

- Working lights, cab mounted (front and rear)

Operator Station

- Adjustable hydraulic sensitivity

- Air conditioner, heater and defroster with automatic climate control

- Camera mounted on counterweight, displays through cab monitor

- Falling objects guard

- Fixed cab riser 1200 mm (4 ft)

- Lid for storage compartment

Radio

- Radio, AM/FM stereo (24V)

- Radio ready mounting (12 V or 24 V) at rear location including speakers and 12 V converter

Seat

- Adjustable high-back seat with mechanical suspension

- Adjustable high-back seat with air suspension (vertical)

- Adjustable high-back deluxe seat with headrest, air suspension (horizontal and vertical), two-step seat heater, automatic weight adjustments, ventilated seat cushions, pneumatically adjustable lumbar support

Headrest

- Travel speed lock

- Vandalism guards

- Visor for rain protection

Windshield

- One-piece high impact resistant

- 50/50 split, openable

- 70/30 split, openable

Undercarriage

- Dozer blade, front and/or rear mounted, with remote greasing

Optional tires

Dual tires

- 11.00-20 dual tires

- 10.00-20 dual solid rubber

Single tires

- 18-R 19.5 XF single

- 600/40-22.5 single

- Outriggers, front and/or rear mounted

- Second tool box for undercarriage

- Spacer rings for tires

- Wide axles

Other Equipment

- Auto-lube system for the implements and swing gear

- Cat Machine Security System

- Counterweight 3900 kg (8,598 lb)

- Custom paint

- Heated mirrors, frame and cab

- Joystick steering

- Enables steering of the machine in first gear using the sliding switch on joystick

- Lockable tool box in upper frame

- Ride control, for increased comfort while traveling and working

- Waste package with cyclone air pre-cleaner, reversible fan with programmable time

Notes

M315D Wheel Excavator

For more complete information on Cat products, dealer services,
and industry solutions, visit us on the web at www.cat.com

© 2007 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Caterpillar dealer for available options.

AEHQ5754-01 (02-07)

Replaces AEHQ5754

CAT, CATERPILLAR, ACERT, HEES, their respective logos, "Caterpillar Yellow" and the
POWER EDGE trade dress, as well as corporate and product identity used herein,
are trademarks of Caterpillar and may not be used without permission.

CATERPILLAR[®]