

962H

Wheel Loader



Engine

Engine Model	Cat® C7 ACERT™	
Gross Power - SAE J1995	172 kW	230 hp
Net Power - ISO 9249	158 kW	211 hp

- Caterpillar engine with ACERT™ Technology - EPA Tier III, EU Stage III Compliant

Buckets

Bucket Capacities	2.7-3.8 m ³	3.5-5.0 yd ³
-------------------	------------------------	-------------------------

Weights

Operating Weight	19 365 kg	42,700 lb
• For 3.5 m ³ (4.5 yd ³) general purpose bucket with BOCE		

Operating Specifications

Static Tipping Load, Full Turn	12 098 kg	26,676 lb
--------------------------------	-----------	-----------

- For 3.5 m³ (4.5 yd³) general purpose bucket with BOCE

962H Wheel Loader

H-Series Wheel Loaders - The New Standard For Midsize Loaders

RELIABILITY

- Proven Components And Technology Equal Proven Reliability
- Diagnostic Systems Monitor Product Health To Ensure Reliability
- Unmatched Parts Availability And Dealer Support **pg. 4**

DURABILITY

- ACERT™ Technology Maintains Performance, Efficiency And Durability While Meeting Emissions Regulations
- Heavy Duty Components Stand Up To All Operating Conditions
- Strong, Solid Structures Built To Last **pg. 6**

PRODUCTIVITY

- Improved Cycle Times With Load-Sensing Hydraulic System
- Constant Net Horsepower Through The Operating Range
- Aggregate Autodig Automates The Loading Process **pg. 8**

SERVICEABILITY

- Service Centers For Convenient Maintenance
- Exceptional Access To Service Points
- Monitoring Systems And Dealer Support Reduce Unexpected Downtime **pg. 16**

Performance you can feel with the capability to work in the most demanding applications. Unmatched operator comfort and efficiency in a world class cab. Revolutionary electronics and hydraulics for low-effort operation. Increased productivity with lower owning and operating costs.



VERSATILITY

- Special Machine Arrangements For Specialized Applications
- Quick Coupler And Large Variety Of Cat® Work Tools **pg. 10**

OPERATOR COMFORT

- Easy Entry And Exit
- Excellent Visibility
- Comfortable Environment With Controlled Vibration
- Choice Of Steering And Implement Control Systems **pg. 12**

OWNING AND OPERATING COSTS

- Proven Fuel Efficiency
- Superior Maintenance
- Electronic Systems Monitor Product Health And Performance
- Complete Dealer Support **pg. 14**



RELIABILITY

The Cat® 962H - Tested And Proven - Ready To Work

- Proven components and technology provide proven reliability
- Electronic systems monitor vital machine components
- Excellent uptime from the best dealer support network in the industry
- Unmatched genuine Cat parts availability

PROVEN RELIABILITY. The 962H features many of the components designed and proven in previous 962 models - all contribute to the reliability of the 962H:

- Frames
- Axles
- Planetary powershift transmission
- Free wheel stator torque converter
- Separated cooling system
- Cab



ACERT™ TECHNOLOGY. Since March 2003, ACERT Technology has been proving itself in on-highway trucks. More recently it has proven itself again in field tests of off-highway equipment.

This technology allows Cat engines to meet durability and reliability expectations without sacrificing fuel economy or performance.



CATERPILLAR DESIGNED COMPONENTS. Components used to build Cat Wheel Loaders are designed and manufactured to Caterpillar quality standards to ensure maximum performance even in extreme operating conditions.

Engine electronic control modules and sensors are completely sealed against moisture and dust. Deutsche connectors and electrical wire braiding ensure that electrical connections resist corrosion and premature wear.

Hoses are engineered and manufactured for high resistance to abrasion, excellent flexibility and easy installation and replacement.

Caterpillar® couplings use o-ring face seals to provide positive sealing for durable leak-free connections.

Heavy duty components reduce the risk of leaks, corrosion and premature wear increasing uptime and helping to protect the environment.

MONITORING PROGRAMS. Monitoring product health is key to maintaining reliability of any equipment. Many programs are available on the 962H - both as standard and optional features - to help you track machine condition.



Caterpillar Monitoring System. The 962H is equipped with the Cat Monitoring System (CMS) that keeps watch over the health of your loader. CMS monitors critical engine system functions and will derate the engine to protect itself from damage if needed. Depending on which of the following six critical conditions arise, the CMS monitor or front panel will display warning lights and sound audible alarms.

- High coolant temperature
- High air inlet temperature
- Low engine oil pressure
- High fuel pressure
- Low fuel pressure
- Engine over-speed

Product Link. Product Link is a state-of-the-art satellite technology based product that provides two-way information flow between machine on-board systems and the Caterpillar network operations center. Multiple types of information can be collected and tracked - from machine location and service meter hours, to health and productivity information.

EquipmentManager. With a subscription to EquipmentManager through the Cat Dealer Storefront the information collected through Product Link can be transmitted to a computer. With fast, easy-to-access machine information, you can optimize asset utilization, reduce security risks, improve maintenance management and implement before-failure repair strategies. The result is more uptime, lower operating costs and a higher overall return on equipment investment.

S•O•SSM Services. Keep minor repairs from becoming major ones and avoid complete failures. By regularly taking samples from the ports provided, your Cat dealer tracks wear of components and parts, oil performance, and oil condition and uses that data to predict wear-related problems before they happen. Often a simple adjustment or replacement of a part, based on S•O•S reports, can keep a small problem from turning into a major repair - allowing your machine to be running when you need it, not waiting in the shop for service.



DEALER SUPPORT. The Caterpillar global network of independently-owned dealers is the best in the world at providing support to keep your loader up and running. Known for parts availability and technical expertise, Cat dealers are partners in your business.



Service Capabilities. Cat field service technicians have the experience and tools necessary to service your loader on site. Field service trucks are fully loaded with state-of-the-art tools and diagnostic equipment as well as specifications and schematics for every Cat machine. Technical experts at the dealership and at Caterpillar are available to provide assistance to field service technicians when needed.

When on-site repair isn't enough, Cat dealerships are fully-equipped to service your loader quickly.

PARTS AVAILABILITY. Caterpillar provides an unsurpassed level of personalized service for your wheel loader. With parts distribution centers throughout the world, most parts can be delivered in 24 hours.

DURABILITY

Built Strong And Tough

- ACERT™ Technology maintains engine performance, efficiency and durability while reducing emissions
- Heavy duty components withstand all operating conditions
- Strong, solid structures built to last



EPA TIER III, EU STAGE III COMPLIANT

C7 ENGINE. ACERT Technology combines proven systems with innovative new technologies to precisely deliver fuel to the combustion chamber. It maintains engine performance, efficiency and durability while dramatically reducing emissions.

The Cat C7 with ACERT Technology is a 7.2 L displacement, 6-cylinder, electronically governed engine. Electronic fuel injection is provided through the well-proven Caterpillar hydraulically actuated, electronically controlled unit injection (HEUI) system. A wastegate turbocharger, equipped with a titanium wheel for improved durability, combined with air-to-air aftercooling (ATAAC) provides consistent high horsepower with increased altitude capability.

Electronic Controller. The engine is governed by the ADEM™ A4 electronic control module. The controller continually adjusts engine output based on load demand using a series of sensors located on the machine and engine.

Hydraulically Actuated Electronic Unit Injectors (HEUI). The HEUI™ system has been at work in Cat engines across the product line with a proven track record of consistent, durable, reliable performance.

Engine Block and Pistons. The gray, cast iron engine block is made of the same material as the cylinder heads. Wall diameters are thicker than in previous designs while adjustments have been made to reduce sound levels and increase rigidity. One-piece all-steel pistons are housed within a wet, replaceable cast iron cylinder liner constructed of high-strength, heat-treated castings. Steel-forged connecting rods are larger in diameter and are connected to the crankshaft with two bolts.

Cylinder Head. The cylinder head is a one-piece design that incorporates cross-flow design to facilitate air movement. This allows the engine to breathe cooler, cleaner air with less effort.

RADIATOR. Brazed aluminum construction provides a stronger joint for maximum durability and resistance to leaks. The 6-fins-per-inch, square-wave core design decreases the chance of blockage and plugging.



POWERSHIFT TRANSMISSION. The 962H continues to use heavy-duty powershift transmission technology proven on previous models and currently used up through the largest wheel loader built by Caterpillar - the 994F.

The planetary powershift transmission features heavy-duty components to handle the toughest applications. Built-in electronic controls enhance shift quality, productivity and durability.

Control Throttle Shifting. Control Throttle Shifting regulates engine speed during high-energy directional changes for smoother shifting and longer component life.

Electronic Clutch Pressure Control. Electronic Clutch Pressure Control (ECPC) system modulates clutches individually to improve shift quality, component life and operator comfort. Adjustment is simplified with all solenoid valves externally mounted on top of the transmission housing.


AXLES. The 962H axles are designed by Caterpillar for durability in all operating conditions. The front axle is rigidly mounted to the frame to support the weight of the wheel loader and withstand internal torque loads as well as external forces encountered throughout operation.

The rear axle is designed to allow $\pm 13^\circ$ oscillation. All four wheels remain on the ground over uneven terrain providing excellent stability and traction.



Integrated Braking System. The Cat exclusive Integrated Braking System reduces axle oil temperatures and improves transmission neutralizer smoothness. IBS has a direct impact on durability of the axles and brakes especially in applications involving long distances and/or heavy braking.

STRUCTURES. The articulated frame design of the 962H features a durable box-section engine frame and rigid four-plate loader tower that is robotically welded. Robotic welding creates frame joints with deep plate penetration welds and excellent fusion for maximum strength and durability.

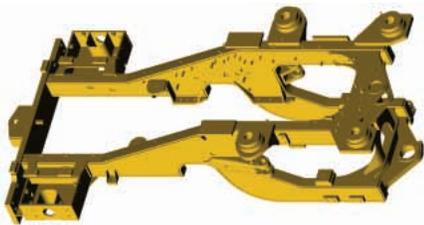

Engine End Frame (EEF). A full box-section engine end frame with hitch plates at the front end provides a strong, rigid structure that resists twisting and impact loads. The result is an extremely solid mounting platform for the engine, transmission, axle, ROPS and other accessories.



Spread Hitch. The distance between the upper and lower hitch plates is an important contributor to machine performance and component life. The Caterpillar spread hitch design provides excellent load distribution and bearing life. Both the upper and lower hitch pins pivot on double tapered roller bearings - improving durability by distributing both vertical and horizontal loads over a larger surface area. The wide opening also provides excellent service access.



Non-Engine End Frame (NEEF). The non-engine end frame provides a solid mounting base for the front axle, lift arms, lift cylinders and tilt cylinders. The fabricated, four-plate loader tower absorbs the forces associated with loading, twisting and penetration.



Counterweight. The one-piece counterweight is integrated into the 962H design and styling. This 3084 lb (1399 kg) counterweight incorporates the rear lights into the top of the structure.



Linkage. The 962H linkage is a single-tilt Z-bar design. Z-bar linkage generates excellent breakout force and good rack back angle for better bucket loading and load retention.

Lift arms are solid steel, providing superior strength with an excellent front end viewing area. The proven design offers excellent dump clearance and reach for exceptional matching to both on- and off-highway trucks.

Rotary sensors, for the tilt lever and lift circuit allow the operator to electronically set detent positions from the cab. A guard covers the sensor to protect it from damage.

PRODUCTIVITY

Work Smart And Move More

- Hydraulics are easy to control with low effort
- Maximum fuel efficiency and flexibility in idle speeds
- Consistent horsepower regardless of conditions
- Standard and optional features that maximize productivity



LOAD SENSING HYDRAULICS. The 962H features a load sensing hydraulic system that automatically adjusts to operating conditions to provide only the hydraulic flow required by the implement for improved fuel efficiency.

With the new M3PC Priority Proportional Pressure Compensation Valve, implement control is improved over the previous system - raise/lower and rack back/dump can be operated simultaneously and fine modulation is repeatable for improved productivity.

Operators will notice enhanced ease of operation, more rimpull into the pile and a 20% increase in lift force.



Electrohydraulic Implement Controls. Electrohydraulic implement controls on the 962H provide the operator with in-cab programmable kickouts to prevent material spillage - improving productivity. The implement control console features an optional Forward/Neutral/Reverse switch allowing fast, easy directional changes to reduce cycle times.

CONSTANT NET HORSEPOWER. On many competitive machines, gross horsepower is constant, meaning that net engine power available for actual work will vary based on demands made from parasitic sources, such as air conditioning or cooling fans.

The Cat C7 engine is electronically configured to provide constant net horsepower at full parasitic load enhancing productivity and improving fuel efficiency.

On-Demand Fan. With electronic control of the variable speed on-demand fan, temperature levels of the engine coolant, transmission oil, hydraulic oil and air inlet manifold are constantly monitored. This data is used to control and maintain fan speed at the level necessary to maintain normal system temperatures. Controlled fan speed improves fuel efficiency, lowers noise levels and reduces radiator plugging.

Separated Cooling System. Many competitive loaders use cooling systems that pull air in from the sides, through the engine compartment and exhaust it out the rear of the machine. The 962H cooling system is isolated from the engine compartment by a non-metallic shield. The hydraulically driven, variable speed fan draws in clean air from the rear of the machine and exhausts it out the sides and top of the hood. The end results are optimal cooling efficiency, increased fuel efficiency, less radiator plugging and reduced operator sound levels.



PLANETARY POWERSHIFT TRANSMISSION. The electronic planetary powershift transmission with automatic shift capability is designed and built by Caterpillar. The very responsive, full-power speed and directional changes provide excellent cycle times and productivity.

VARIABLE SHIFT CONTROL. Match transmission shifting patterns to machine application requirements. Variable Shift Control (VSC) improves shift quality and fuel efficiency in certain applications by allowing the transmission to upshift at lower engine RPMs.



RIDE CONTROL. The optional Ride Control System improves ride, performance and load retention when traveling over rough terrain. Operators gain confidence moving at higher speeds in load and carry operations decreasing cycle times and increasing productivity.



PAYLOAD CONTROL SYSTEM. Scales, designed specifically for Cat machines allow on-the-go weighing of material in the bucket. Operators load trucks more accurately and efficiently. Loading trucks right the first time equates to quicker cycles for the operator and more productivity and controllability for your operation.

Payload Control is offered as a factory-installed option. Driver tickets and a variety of reports can be printed with the addition of the optional printer.

AUTOLUBE. The optional Caterpillar Autolube System provides precise, automatic lubrication of pins and bushings - during loader operation. Automatic lubrication reduces time spent on daily maintenance and downtime for unplanned repairs due to inadequate greasing - improving productivity.

AGGREGATE AUTODIG. Well-received by both experienced and novice operators, the optional Aggregate Autodig automates the loading process.

Aggregate Autodig provides smoother loading cycles, consistently full payloads and eliminates tire spin - all without touching the controls.

VERSATILITY

Built For Your Operation

- Special machine arrangements provided from the factory
- A quick coupler and variety of buckets and work tools for many applications

SPECIAL MACHINE ARRANGEMENTS.

When you have a specialized operation, you need a specialized wheel loader to be productive. The following machine arrangements are available for the 962H:

Aggregate Yard Loaders. The Yard Loader Value Package provides the ultimate in productivity and convenience. Options such as Autolube, Aggregate Autodig, Payload Control and Ride Control reduce operator fatigue and make your wheel loader the most productive yard loader available.

Forestry Applications. The Forest Machine Arrangement provides Ride Control, a heavy-duty tilt cylinder and an additional counterweight for use in forestry and logging applications. Specially-designed work tools for forestry applications can be factory-installed.

Industrial Loader. Heavy duty guarding and special features designed specifically for industrial applications, such as waste and scrap handling, allow the 962H to withstand the harshest of conditions. Work tools designed specifically for these applications can be added to the machine.

Lift Arrangements. High lift arrangements are available for applications requiring additional dump clearance. Both 2-valve and 3-valve packages can be factory installed for conventional steering and Command Control machines.

WORK TOOLS AND QUICK COUPLERS.

A variety of buckets, work tools and couplers are available from the factory or from your Caterpillar dealer to customize the 962H for your operation.



Quick Couplers. Quick couplers provide unmatched versatility for wheel loaders. The hydraulic model allows an operator to change attachments in seconds without leaving the cab. On the manual model, the operator must lock the pins.

Buckets. Various types and sizes of buckets are available to match Cat wheel loaders to any job, anywhere, any time.



General Purpose Buckets. General purpose buckets provide good all-around performance for stockpiling, rehandling, excavating and bank loading. A heavy duty general purpose bucket can be used for more aggressive applications.

Material Handling Buckets. The material handling bucket is a flat-floor bucket used for handling stockpiled materials such as aggregates or other easy-to-load materials requiring moderate breakout force.

Multi-Purpose Buckets. Multi-Purpose Buckets have a unique four-way action that can load, strip topsoil, bulldoze, clamp pipe or large chunks of concrete, clean up debris, and many other tasks.

Rock Buckets. These buckets are designed to work primarily in the mining and quarry industries, either in straight- or spade-edge configurations. The straight edge has higher breakout force and increased dump clearance; the spade edge offers better penetration.

Side Dump Buckets. Side dump buckets dump both to the front and to the side of the machine, an advantage when working in tight quarters, such as street work, tunnel construction and building levees.

Waste Buckets. Waste buckets are designed for long life in the harsh world of refuse applications. This high-capacity bucket is well-suited for loading, sorting and other transfer station work.

Woodchip and Clean-Up Buckets.

Woodchip and high-capacity clean-up buckets are available for forestry and millyard applications.



Ground Engaging Tools (GET). Several GET options are available from Caterpillar for the IT62H buckets. A cast corner adapter is incorporated into the design of the buckets that allows a tooth to be placed on the extreme corner for protection against base bucket wear.

Reversible bolt-on cutting edges (BOCE) and a bolt-on half-arrow cutting edge are also available for the IT62H buckets.

The Cat K Series™ tooth system features an easier-to-install tip and provides very secure tooth retention. No special tools are required for installation and removal.



Forks. From pallet forks up through specialized logging arrangements, loader forks are available for a wide range of jobs.

Core Forks. Superior design makes Cat core forks the logical choice for plywood mills and millyards.

Grapple Forks. Grapple forks with kickout offer many high-performance log-handling features such as easy loading, increased dump clearance and improved sorting ability.

Logging Forks. Logging forks are designed for heavy duty applications - loading and unloading trucks, sorting, decking and feeding the mill.

Lumber and Log Forks. Lumber and log forks are ideal for a wide range of jobs loading, decking and sorting lumber, logs or palletized material.

Millyard Forks. Used for unloading, sorting, decking and feeding logs to the mill, millyard forks maximize loader efficiency in millyard applications.

Pallet Forks. When used with a quick coupler, pallet forks increase the versatility of the machine; ideal for handling a variety of materials.

Other Work Tools. Caterpillar offers a constantly increasing array of work tools to add value and functionality to Cat wheel loaders.

Material Handling Arms. Material handling arms move pipe, concrete blocks, highway dividers and other construction materials quickly and precisely.

Loader Rakes. Loader rakes are durable, high-capacity tools for land clearing and site clean up. Rakes are available with or without top clamps and in quick coupler and pin-on models.

Angle Blades. Angle blades, available in both manual and hydraulic versions, equip Cat machines to sidecast soil, plow snow, pioneer roads and move debris and rocks.

Angle Brooms. Hydraulic and manual angle brooms are ideal for clearing parking lots, industrial plants, millyards, airport runways, streets, driveways and lanes.

Special Application Brooms. Special application brooms are built to handle tough sweeping situations found in sewer and pipeline, governmental and coal seam applications.

Snow Removal. Hydraulic and manual reversing plows and trip-edge reversing plows are available for Cat 962H wheel loaders. Quick reversing action plows are ideal for clearing snow on mountain roads, airports, large parking lots, plant facilities and rural or urban roads. V-plows penetrate drifts and throw snow both directions to quickly clear a path through heavy accumulations.

OPERATOR COMFORT

Work Comfortably And Efficiently

- Comfortable operation
- Excellent visibility
- Easy entry and exit
- Controlled vibration
- Choice of steering systems

OPERATING ENVIRONMENT. The 962H maintains the distinction of offering the largest, most ergonomic cab in its class.



Seat. The Cat C-500 Series Comfort air suspension seat, standard in the 962H, is built strong and durable and is 6-way adjustable to accommodate all-sized operators. The cast one-piece back and seat pan prevent protrusions under the cushions. The seat features an automotive-style lumbar support for maximum comfort. The right hand armrest with integrated implement controls adjusts for comfortable, convenient operation. A heated seat option is available for additional comfort.

VISIBILITY. The 962H provides excellent visibility to both the front and rear of the machine. Distortion-free flat glass stretches to the floor of the cab for excellent visibility to the bucket. Wet-arm wipers on both front and back keep the windows clean in any condition. The cab roof has channels that direct rain off the corners of the cab keeping windows clear. An overhang on all sides protects the operator from glare.

Windshield Cleaning Package. An optional windshield cleaning package provides additional steps and handrails to provide easy access for cleaning the front windows.

Rear Vision Camera. An optional rear vision camera is available to clearly monitor movement behind the wheel loader.

Lighting Packages. Optional lighting packages are available for roading or low-light applications. The optional High Intensity Discharge (HID) lights provide exceptional lighting for night work. A rotating beacon is available as a safety feature.



ENTRY AND EXIT. A ladder with self-cleaning steps keeps debris build-up to a minimum. The ladder is at a 5° forward incline for easy entry and exit.

Platforms are wide allowing ease of movement to the front or rear of the machine. The main cab door opens a full 180° and latches in place to allow safe navigation to the rear of the machine.

The right side door opens 10°, or completely for secondary exit simply by pulling a pin. A full-length ladder on the right side facilitates safe exit if needed.

VIBRATION. Caterpillar understands that wheel loaders work in some of the harshest environments. By controlling normal machine vibrations, operator efficiency and productivity are improved. From the ground up, the Cat 962H is designed with many features, both standard and optional, that reduce vibration.

- The oscillating rear axle follows the contour of the ground while allowing the cab to stay steady.
- The cab is attached to the frame with iso-mounts designed to reduce shock loads from the ground.
- The articulation joint is equipped with two neutralizer valves that prevent frame-to-frame contact.
- Cylinder dampening slows the bucket as it reaches the limits of travel, preventing machine jarring.
- Ride Control is an option designed to reduce jolting and bouncing during load and carry operations. An accumulator acts as a shock absorber to reduce machine pitching and provide a smoother ride over rough terrain.
- Electronically controlled, automatic kickouts prevent the jerking and bouncing associated with abrupt cylinder stops.
- Air suspension seat-mounted implement controls reduce vertical vibrations that come up through the floor.

AGGREGATE AUTODIG. The optional Aggregate Autodig System provides smoother loading cycles and consistently full payloads without touching the controls - reducing operator fatigue.



CONTROLS. The main control panel on the 962H is located high on the right ROPS post - keeping everything within reach of the operator while maintaining visibility to the ground. Keeping all switches and controls conveniently placed allows better efficiency and improved productivity all while minimizing operator fatigue.

STEERING OPTIONS. The 962H offers a choice of steering systems to provide flexibility for your application.

Conventional Steering. The conventional steering configuration offers a low-effort hand metering unit hydraulic steering system. Load sensing steering directs power through the steering system only when needed. When not steering, more engine power is available to generate rimpull, breakout force, lift force, and results in reduced fuel consumption. The steering column tilts for maximum operator comfort.



Command Control Steering. Command Control Steering is a load-sensing system that links the steering wheel and frame angle positions to provide the proper amount of steering control. The speed the machine turns is proportional to the steering wheel position. Less than 6 lb (26 N) steering effort is required by the operator, regardless of conditions. Full machine articulation is accomplished with a $\pm 70^\circ$ turn of the

wheel - versus two to three 360° turns of a conventional steering wheel.

The Command Control Steering wheel contains the forward/neutral/reverse switch and the upshift/downshift button - allowing the left hand to remain on the steering wheel at all times. Implement controls are integrated into the right armrest so they move with the operator.

OWNING AND OPERATING COSTS

The 962H - Best Value For Your Operation

- More return for your wheel loader investment through proven Cat fuel efficiency
- Sight gauges, grouped maintenance points, easy engine access, ecology drains, maintenance-free batteries - all simplify daily maintenance
- Electronic monitoring systems track product health to avoid unscheduled costly repairs
- Unsurpassed parts availability reduces downtime
- Excellent resale value provided by genuine Cat quality, outstanding dealer service and unmatched dealer support programs
- Caterpillar Financial Services and Cat dealers understand your business



FUEL EFFICIENCY. Many manufacturers tout fuel consumption as one of the determining factors for machine acquisition, but fuel consumption is only part of the story. Productivity must also play a part in the decision. Even more importantly, how fuel consumption and productivity interact - fuel efficiency - should be considered.

962H Fuel Efficiency. Customer testing of the 962H is showing an improvement in fuel efficiency over the 962G Series II. This fuel savings is achieved through the integration of the Caterpillar proportional-flow load sensing hydraulic system, Engine Idle Management System software, Variable Shift Control and ACERT™ Technology.

ACERT™ Technology Fuel Economy. Based on Caterpillar testing, the fuel economy of Cat engines with ACERT Technology is 3 to 5 percent better than current competing technologies. This fuel economy is directly related to the complete combustion of fuel due to the integration between the electronic control that monitors conditions, the air management system that controls air volume and the fuel injection system that delivers just the right amount of fuel as needed.

Free Wheel Stator Torque Converter (FWSTC). The free wheel stator torque converter improves power train efficiency in load and carry operations which contributes to the improved fuel efficiency of the 962H.

ENGINE IDLE MANAGEMENT SYSTEM. The Engine Idle Management System (EIMS) maximizes fuel efficiency and provides flexibility in managing idle speeds for specific application requirements. Four idle control speeds are available.

Hibernate Mode. Idle speed drops after a preset time to provide lower fuel consumption, reduced sound levels and lower emissions.

Work Mode. Adjust working idle speeds according to customer preference and operating conditions.

Warm-Up Mode. Keep the engine at a consistent temperature in cold conditions.

Low Voltage Mode. Prevent battery drain due to high electrical loads from attachments and accessories.

MAINTENANCE. Proper maintenance of your wheel loader can help control expenses and lower your owning and operating costs. The 962H provides unmatched serviceability by offering:

- Hydraulic service center
- Electric service center
- Well-protected, easily visible sight gauges
- Ground level maintenance points
- Easy access to engine compartment
- Ecology drains for simple and clean fluid drainage
- Brake wear indicators for ease of inspection
- Maintenance-free batteries
- Extended oil and filter change intervals
- Airborne debris-resistant, swing-out grill provides more efficient airflow

MONITORING SYSTEMS. Monitoring product health simplifies maintenance planning and reduces costs.

Caterpillar Monitoring System. The Caterpillar Monitoring System (CMS) tracks critical machine systems to alert the operator to potential need for service. Three levels of warning allow the operator to assess the situation more accurately.

Product Link. With Product Link owners can collect and track multiple types of information - from machine location and service meter hours, to health and productivity information.

EquipmentManager. With a subscription to EquipmentManager information from Product Link can be transmitted to a computer. Return on equipment investment is optimized through maintenance management and improved uptime.

Machine Security System. Stolen equipment equates to lost production and increased costs. Eliminate machine theft and unauthorized usage with the Cat Machine Security System (MSS). MSS is integrated into the machine's electronic system and can protect most brands of equipment by requiring a uniquely coded key to start the machine.

S•O•S Services. Managing component life and machine availability decreases downtime while improving your productivity and efficiency. S•O•S Services can help you do that. Regular fluid sampling is used to track what is going on inside the equipment. Wear-related problems are predictable and easily and quickly repairable. Maintenance can be done according to your schedule, resulting in increased uptime and flexibility in maintenance and repair before failure.



PARTS AVAILABILITY. Caterpillar provides an unsurpassed level of personalized service for your wheel loader. With parts distribution centers worldwide, most parts can be delivered in 24 hours. Easy access to parts reduces downtime.

RESALE VALUE. Owning quality equipment is a very important factor in maintaining resale value. Cat not only supplies quality equipment but also provides product and dealer support to maintain the reliability and durability of your machine.



Customer Support Agreements. A Customer Support Agreement (CSA) is any arrangement between you and your Cat dealer that helps you lower your total cost per unit of production. CSAs are flexible, allowing them to be tailored to your business. They can range from simple Preventive Maintenance Kits to sophisticated Total Cost Performance Guarantees. Having a CSA with your Cat dealer allows you more time to do what you do best - run your business.

Caterpillar Equipment Training Solutions. A thorough understanding of machine systems and a high level of skill in operation helps achieve maximum efficiency and improves return on investment. Caterpillar Equipment Training Solutions programs help provide operators with high levels of proficiency and confidence. Contact your Cat Dealer for more information on Caterpillar Equipment Training Solutions programs.

Caterpillar Financial Services Corporation. Cat Financial understands your business, your industry and the challenges you face. That's why they can provide payment plans to fit your unique needs - and to help you achieve your goals.

SERVICEABILITY

Easy To Maintain - Easy To Service

- Grouped service points and sight gauges for easy daily maintenance
- Convenient access to engine compartment for excellent serviceability
- Swing-out grill and cooling cores for easy cleaning
- Electronic systems to monitor product health



HYDRAULIC SERVICE CENTER.

Transmission oil and hydraulic filters are located in the Hydraulic Service Center, behind the hinged, right-side access ladder. The hydraulic oil tank can be drained from this location using the access port.

- Hydraulic filter change interval at 500 hours
- Transmission filter change interval at 1000 hours



ELECTRIC SERVICE CENTER. Batteries, relay panel and an optional tool box are conveniently located below the left-side access platform. The engine shutdown switch is housed with the relay panel. A compartment integrated into the access platform contains the hood tilt actuation switch, master switch and jump-start receptacle.




GROUND LEVEL GREASE POINTS.

Grease fittings are grouped on the right side of the machine in two convenient locations - in a service compartment just below the right-side service platform, and a bank located just off the non-engine end frame. These locations facilitate easy lubrication of vital components located throughout the machine.

AUTOLUBE. Reduce time spent on daily maintenance and downtime for unplanned repairs due to inadequate greasing with the optional Caterpillar Automatic Lubrication System. Precise lubrication of pins and bushings at specific intervals improves component wear and reduces ground contamination from excessive greasing.



REMOTE PRESSURE TAPS. Pressure taps for the steering and hydraulic systems, transmission (optional) and brakes are grouped behind an access panel just below the right-side service platform.

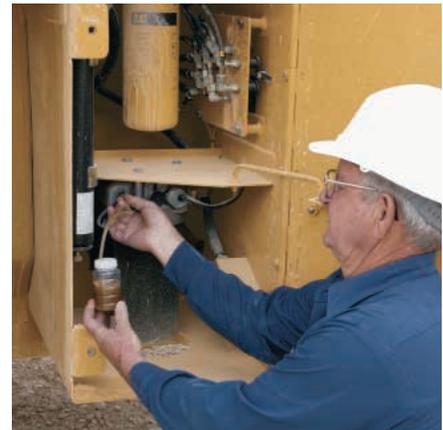

S•O•S SERVICES. Sampling valves on the 962H allow quick access to engine, transmission and hydraulic oils for S•O•S analysis. Oil change intervals and other services can be optimized according to your work schedule, reducing downtime and managing expenses.



SIGHT GAUGES. Well-protected, yet easily visible sight gauges for the transmission, hydraulic oil and radiator coolant allow easy daily checks while reducing the risk of contaminants entering the systems.

BRAKE WEAR INDICATORS. Axles are equipped with standard brake wear indicators, allowing a technician to easily determine when it is necessary to service the brakes.



ENGINE COMPARTMENT ACCESS. The non-metallic hood on the 962H has been redesigned and restyled from previous models. Side and top panels are stronger due to more robust reinforcement ribs - the change in contour also adds to rigidity of the hood.

A single mechanical lift cylinder with manual back-up opens the hood. The tilting hood provides excellent access to the engine compartment, and if necessary, the entire hood can be removed with the built-in lift points.

With the hood closed, quick checks of engine oil levels and the coolant sight gauge can be completed through the side service doors.

Panels located behind the tires lift up and can be removed for additional access. Rooding fenders hinge from the rear and swing out allowing easier access to the engine compartment.



ELECTRIC PRIMING PUMP. An electric fuel priming pump located on the primary fuel filter base eliminates the need to pre-fill or manually prime filters after a change, eliminating engine contamination.

ECOLOGY DRAINS. Engine, transmission and hydraulic oils can be easily drained with standard-equipment ecology drains. An axle oil ecology drain is optional.



COOLING SYSTEM. Cooling system access for clean-out and maintenance is outstanding. The perforated and corrugated grill minimizes debris build-up and swings out for easy cleaning and access to the cooling cores.

The full-width air conditioning condenser and oil cooler cores swing out 45° to allow easy cleaning of the rear radiator face. Access panels on either side of the radiator support structure provide access to the front face of the radiator and ATAAC cores for easy cleaning.

CAB. The entire operator station can be removed in about 45 minutes and is easy to re-attach. Quick disconnects are used so no wires need to be cut and no refrigerant is lost.

Cab cleaning is made easy with channels on the cab floor and no threshold at the door - the floor can be swept or mopped out easily.

WINDSHIELD CLEANING PACKAGE. An optional windshield cleaning package consists of two steps for the loader front frame, two additional handrails and a folding mirror. This package allows access to the entire front windshield for easy cleaning.

COMPLETE CUSTOMER SUPPORT. Cat field service technicians have the experience and tools necessary to service your loader on site. Technical experts at the dealership and Caterpillar can provide additional assistance to field service technicians as needed.

Engine

Engine Model	Cat® C7 ACERT™	
Gross Power - SAE J1995	172 kW	230 hp
Net Power - ISO 9249	158 kW	211 hp
Net Power - SAE J1349	156 kW	209 hp
Net Power - 80/1269/EEC	158 kW	211 hp
Peak Torque (Net) @ 1,400 RPM	907 N-m	669 ft-lb
Bore	110 mm	4.33 in
Stroke	127 mm	5 in
Displacement	7.2 L	439 in ³

- Caterpillar engine with ACERT™ Technology - EPA Tier III, EU Stage III Compliant
- These ratings apply at 1,800 rpm when tested under the specified standard conditions.
- Rating for net power advertised based on power available when the engine is equipped with alternator, air cleaner, muffler and on-demand hydraulic fan drive at maximum fan speed.

Weights

Operating Weight	19 365 kg	42,700 lb
------------------	-----------	-----------

- For 3.5 m³ (4.5 yd³) general purpose bucket with BOCE

Buckets

Bucket Capacities	2.7-3.8 m ³	3.5-5.0 yd ³
Max Bucket Capacity	3.8 m ³	5 yd ³

Operating Specifications

Static Tipping Load, Full Turn	12 098 kg	26,676 lb
Breakout Force	147 kN	33,075 lb

- For 3.5 m³ (4.5 yd³) general purpose bucket with BOCE

Transmission

Forward 1	7 km/h	4.4 mph
Forward 2	13 km/h	8.1 mph
Forward 3	22.6 km/h	14.0 mph
Forward 4	38 km/h	23.6 mph
Reverse 1	7.6 km/h	4.7 mph
Reverse 2	13.9 km/h	8.6 mph
Reverse 3	24.5 km/h	15.2 mph
Reverse 4	40 km/h	24.9 mph

- Maximum travel speeds (23.5-25 tires).

Hydraulic System

Bucket/Work Tool System - Pump Output	270 L/min	71 gal/min
Steering System Pump Type	Piston	
Hydraulic Cycle Time - Raise	6.2 Seconds	
Hydraulic Cycle Time - Dump	1.3 Seconds	
Hydraulic Cycle Time - Lower, Empty, Float Down	2.5 Seconds	
Hydraulic Cycle Time - Total	10 Seconds	

- Implement System (Standard), Piston Pump - Rated at 2,100 rpm and 1,000 psi (6900 kPa).
- Cycle time with rated payload

Brakes

Brakes	Meets required standards.
--------	---------------------------

- Meet OSHA, SAE J1473 OCT90 and ISO 3450-1985 standards.

Axles

Front	Fixed front	
Rear	Oscillating +/- 13°	
Maximum Single-Wheel Rise and Fall	470 mm	18.5 in

Tires

Tires	Choose from a variety of tires to match your application.
-------	---

- Choice of:
 - 23.5R25, L2, VSW
 - 23.5R25, L2, VUT D2A
 - 23.5R25, L2, XTLA
 - 23.5R25, L3, VMT
 - 23.5R25, L3, XHA
 - 23.5R25, L5, XMINE
 - 750/65R25, L3, XLD
 - 23.5-25, L2, SGGL
- NOTE: In certain applications (such as load and carry) the loader's productive capabilities might exceed the tires' tonnes-km/h (ton-mph) capabilities. Caterpillar recommends that you consult a tire supplier to evaluate all conditions before selecting a tire model. The 23.5-25 size range and other special tires are available on request.

Cab


ROPS/FOPS	Meets SAE and ISO standards.
<ul style="list-style-type: none">• Caterpillar cab with integrated Rollover Protective Structure (ROPS) are standard in North America and Europe.• ROPS meets SAE J1040 APR88 and ISO 3471:1994 criteria.• Falling Objects Protective Structure (FOPS) meets SAE J231 JAN81 and ISO 3449:1992 Level II criteria.• The operator sound pressure level measured according to the procedures specified in ISO 6394:1998 is 72 dB(A) for the cab offered by Caterpillar, when properly installed and maintained and tested with the doors and windows closed.• Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in noisy environments.• The sound pressure level is 111 dB(A) measured according to the static test procedure and conditions specified in ISO 6395:1998 for a standard machine configuration.	

Service Refill Capacities

Fuel Tank - Standard	314 L	83 gal
Cooling System	42 L	11 gal
Crankcase	30 L	7.9 gal
Transmission	34 L	9 gal
Differentials and Final Drives - Front	36 L	9.5 gal
Differentials and Final Drives - Rear	36 L	9.5 gal
Hydraulic Tank	110 L	29 gal

Dimensions

All dimensions are approximate.

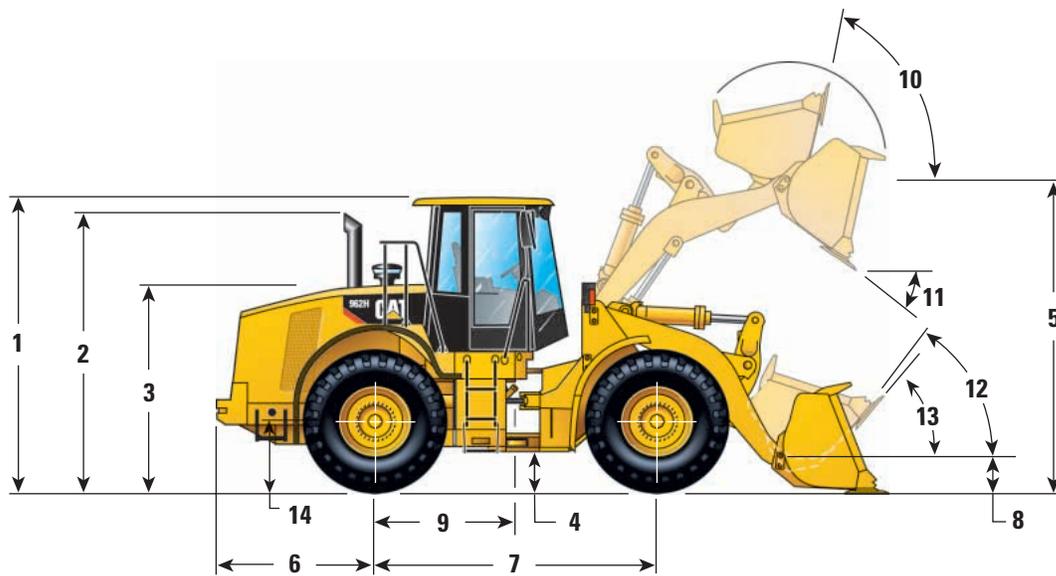

1	Height to top of ROPS	3452 mm	11'4"	7	Wheelbase	3350 mm	11'0"
2	Height to top of exhaust pipe	3369 mm	11'1"	8	B-Pin height @ carry – standard	455 mm	1'6"
3	Height to top of hood	2462 mm	8'1"		B-Pin height @ carry – mid-lift	495 mm	1'7"
4	Ground clearance with 23.5R25 (see Tire Options chart for other tires)	412 mm	1'4"		B-Pin height @ carry – high-lift	591 mm	1'11"
5	B-Pin height – standard	3992 mm	13'1"	9	Center line of rear axle to hitch	1675 mm	5'6"
	B-Pin height – mid-lift	4182 mm	13'9"	10	Rack back @ maximum lift	59.5°	
	B-Pin height – high-lift	4490 mm	14'9"	11	Dump angle @ maximum lift	48.2°	
6	Center line of rear axle to edge of counterweight	1955 mm	6'5"	12	Rack back @ carry	45°	
				13	Rack back @ ground	38.5°	
				14	Height to center line of axle	748 mm	2'5"

Tires

Tread width for 23.5-25 is 2140 mm (7'0")


	Width over tires		Change in vertical dimensions		Change in operating weight		Change in static tipping load	
	mm	inches	mm	inches	kg	lb	kg	lb
23.5R25 VSW BS L2 Radial	2862	113	6	0.2	20	44	14	31
23.5R25 VUT D2A BS L2 Radial	2866	113	10	0.4	-41	-90	-29	-64
23.5R25 XTLA MX L2 Radial	2801	110	7	0.3	-112	-247	-79	-174
23.5R25 VMT BS L3 Radial	2851	112	3	0.1	124	273	88	194
23.5R25 XHA MX L3 Radial	2784	110	0	0.0	0	0	0	0
23.5R25 XMINE MX L5 Radial	2807	111	26	1.0	872	1,923	619	1,365
750/65R25 XLD MX L3 Radial	2879	113	7	0.3	460	1,014	326	719
23.5-25 SGGL FS L2 Bias	2834	112	14	0.6	-472	-1,041	-335	-739

Operation Specifications (Standard Lift Configuration)

General Purpose Buckets

		Teeth and Bolt-on edges			Teeth and Bolt-on edges			Teeth and Bolt-on edges		
		Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
Rated bucket capacity (§)	m ³	2.70	2.90	2.90	2.90	3.10	3.10	3.10	3.30	3.30
	yd ³	3.50	3.75	3.75	3.75	4.00	4.00	4.00	4.25	4.25
Struck capacity (§)	m ³	2.30	2.45	2.45	2.49	2.65	2.65	2.66	2.82	2.82
	yd ³	3.00	3.20	3.20	3.26	3.47	3.47	3.48	3.69	3.69
Width (§)	mm	2994	2994	2927	2994	2994	2927	2994	2994	2927
	ft/in	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"
Dump clearance at full lift and 45° discharge (§)	mm	2824	2824	2926	2819	2819	2922	2814	2814	2917
	ft/in	9'3"	9'3"	9'7"	9'3"	9'3"	9'7"	9'3"	9'3"	9'7"
Reach at full lift and 45° discharge (§)	mm	1315	1315	1215	1300	1300	1202	1292	1292	1195
	ft/in	4'4"	4'4"	4'0"	4'3"	4'3"	3'11"	4'3"	4'3"	3'11"
Reach with lift arm horizontal and bucket level (§)	mm	2635	2635	2493	2630	2630	2488	2630	2630	2488
	ft/in	8'8"	8'8"	8'2"	8'8"	8'8"	8'2"	8'8"	8'8"	8'2"
Digging depth (§)	mm	62	92	92	62	92	92	62	92	92
	in	2.44	3.62	3.62	2.44	3.62	3.62	2.44	3.62	3.62
Overall length	mm	8168	8168	8015	8163	8163	8010	8163	8163	8010
	ft/in	26'10"	26'10"	26'4"	26'9"	26'9"	26'3"	26'9"	26'9"	26'3"
Overall height with bucket at full raise	mm	5386	5386	5386	5443	5443	5443	5491	5491	5491
	ft/in	17'8"	17'8"	17'8"	17'10"	17'10"	17'10"	18'0"	18'0"	18'0"
Turning radius – outside corner of racked bucket, carry position (§)	mm	7090	7090	7017	7089	7089	7016	7089	7089	7016
	ft/in	23'3"	23'3"	23'0"	23'3"	23'3"	23'0"	23'3"	23'3"	23'0"
Static tipping load straight*	kg	14 328	14 018	14 131	14 201	13 895	14 009	14 078	13 779	13 892
	lb	31,593	30,910	31,159	31,313	30,638	30,890	31,042	30,383	30,632
Static tipping load full 37° turn	kg	12 504	12 215	12 328	12 385	12 099	12 213	12 270	11 989	12 103
	lb	27,571	26,934	27,183	27,309	26,678	26,930	27,055	26,436	26,687
Breakout force** (§)	kN	180.0	164.0	165.0	180.0	164.0	165.0	179.0	163.0	164.0
	lb	40,500	36,900	37,125	40,500	36,900	37,125	40,275	36,675	36,900
Operating weight* (§)	kg	19 160	19 317	19 210	19 212	19 369	19 262	19 277	19 434	19 327
	lb	42,248	42,594	42,358	42,362	42,709	42,473	42,506	42,852	42,616

Bucket Selection Guide

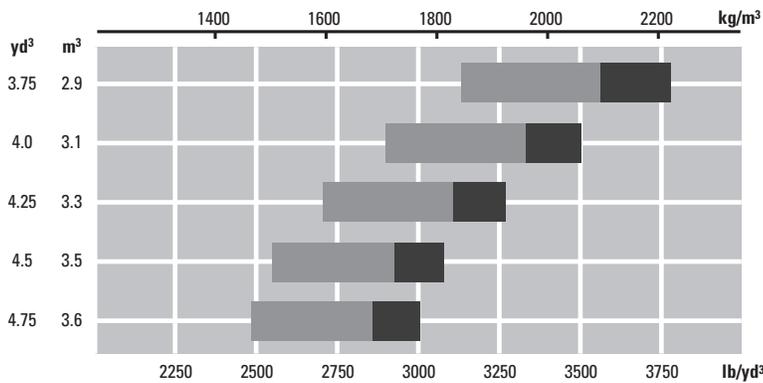

Material Density



General Purpose Quick Coupler Buckets

Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
3.30 4.25	3.50 4.50	3.50 4.50	3.50 4.50	3.60 4.75	3.60 4.75	3.10 4.00	3.30 4.25	3.30 4.25	3.30 4.25	3.50 4.50	3.50 4.50
2.81 3.68	2.98 3.90	2.98 3.90	2.97 3.88	3.14 4.11	3.14 4.11	2.64 3.45	2.80 3.66	2.80 3.66	2.85 3.73	3.00 3.92	3.00 3.92
2896 9'6"	2946 9'8"	2946 9'8"	2946 9'8"	2946 9'8"	2946 9'8"	2896 9'6"	2946 9'8"	2946 9'8"	2896 9'6"	2946 9'8"	2946 9'8"
2708 8'11"	2708 8'11"	2812 9'3"	2671 8'9"	2671 8'9"	2776 9'1"	2681 8'10"	2681 8'10"	2785 9'2"	2630 8'8"	2630 8'8"	2732 9'0"
1406 4'7"	1406 4'7"	1308 4'3"	1435 4'8"	1435 4'8"	1337 4'5"	1448 4'9"	1448 4'9"	1350 4'5"	1558 5'1"	1558 5'1"	1457 4'9"
2786 9'2"	2786 9'2"	2643 8'8"	2833 9'4"	2833 9'4"	2691 8'10"	2834 9'4"	2834 9'4"	2691 8'10"	2944 9'8"	2944 9'8"	2801 9'2"
62.4 2.46	92.4 3.64	92.4 3.64									
8319 27'4"	8319 27'4"	8165 26'9"	8366 27'5"	8366 27'5"	8213 26'11"	8367 27'5"	8367 27'5"	8213 26'11"	8477 27'10"	8477 27'10"	8323 27'4"
5379 17'8"	5379 17'8"	5379 17'8"	5423 17'10"	5423 17'10"	5423 17'10"	5399 17'9"	5399 17'9"	5399 17'9"	5433 17'10"	5433 17'10"	5433 17'10"
7086 23'3"	7109 23'4"	7066 23'2"	7122 23'4"	7122 23'4"	7078 23'3"	7099 23'3"	7122 23'4"	7078 23'3"	7130 23'5"	7153 23'6"	7108 23'4"
13 918 30,689	13 928 30,711	13 879 30,603	13 932 30,720	13 989 30,846	13 903 30,656	13 488 29,741	13 504 29,776	13 450 29,657	13 394 29,534	13 415 29,580	13 369 29,479
12 137 26,762	12 125 26,736	12 098 26,676	12 161 26,815	12 193 26,886	12 132 26,751	11 743 25,893	11 736 25,878	11 705 25,810	11 650 25,688	11 648 25,684	11 625 25,633
159.0 35,775	146.0 32,850	147.0 33,075	153.0 34,425	141.0 31,725	142.0 31,950	153.0 34,425	141.0 31,725	142.0 31,950	139.0 31,275	129.0 29,025	130.0 29,250
19 317 42,594	19 474 42,940	19 365 42,700	19 215 42,369	19 352 42,671	19 244 42,433	19 515 43,031	19 672 43,377	19 564 43,139	19 569 43,150	19 726 43,496	19 618 43,258

Operation Specifications (Standard Lift Configuration)

		Material Handling Buckets								
		Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges		
		Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
Rated bucket capacity (§)	m ³	3.10	3.30	3.30	3.30	3.50	3.50	3.60	3.80	3.80
	yd ³	4.00	4.25	4.25	4.25	4.50	4.50	4.75	5.00	5.00
Struck capacity (§)	m ³	2.67	2.83	2.83	2.84	3.00	3.00	3.10	3.27	3.27
	yd ³	3.49	3.70	3.70	3.71	3.92	3.92	4.00	4.28	4.28
Width (§)	mm	2994	2994	2927	2994	2994	2927	2994	2994	2927
	ft/in	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"
Dump clearance at full lift and 45° discharge (§)	mm	2725	2725	2835	2690	2690	2800	2637	2637	2747
	ft/in	8'11"	8'11"	9'4"	8'10"	8'10"	9'2"	8'8"	8'8"	9'0"
Reach at full lift and 45° discharge (§)	mm	1249	1249	1158	1284	1284	1194	1337	1337	1247
	ft/in	4'1"	4'1"	3'10"	4'3"	4'3"	3'11"	4'5"	4'5"	4'1"
Reach with lift arm horizontal and bucket level (§)	mm	2680	2680	2538	2730	2730	2588	2805	2805	2663
	ft/in	8'10"	8'10"	8'4"	8'11"	8'11"	8'6"	9'2"	9'2"	8'9"
Digging depth (§)	mm	62	92	92	62	92	92	62	92	92
	in	2.44	3.62	3.62	2.44	3.62	3.62	2.44	3.62	3.62
Overall length	mm	8213	8213	8060	8263	8263	8110	8338	8338	8185
	ft/in	26'11"	26'11"	26'5"	27'1"	27'1"	26'7"	27'4"	27'4"	26'10"
Overall height with bucket at full raise	mm	5436	5436	5436	5482	5482	5482	5551	5551	5551
	ft/in	17'10"	17'10"	17'10"	18'0"	18'0"	18'0"	18'3"	18'3"	18'3"
Turning radius – outside corner of racked bucket, carry position (§)	mm	7102	7102	7029	7116	7116	7042	7136	7136	7062
	ft/in	23'4"	23'4"	23'1"	23'4"	23'4"	23'1"	23'5"	23'5"	23'2"
Static tipping load straight*	kg	14 457	14 144	14 259	14 342	14 186	14 148	14 168	13 869	13 984
	lb	31,878	31,188	31,441	31,624	31,280	31,196	31,240	30,581	30,835
Static tipping load full 37° turn	kg	12 618	12 325	12 440	12 511	12 355	12 336	12 349	12 069	12 184
	lb	27,823	27,177	27,430	27,587	27,243	27,201	27,230	26,612	26,866
Breakout force** (§)	kN	172.0	157.0	158.0	164.0	150.0	151.0	153.0	141.0	142.0
	lb	38,700	35,325	35,550	36,900	33,750	33,975	34,425	31,725	31,950
Operating weight* (§)	kg	19 141	19 298	19 191	19 183	19 340	19 233	19 248	19 405	19 298
	lb	42,206	42,552	42,316	42,299	42,645	42,409	42,442	42,788	42,552

Rock Buckets				Waste/ Coal Buckets	High Lift
Bolt-on edges	Teeth and segments	Bolt-on edges	Bottom strap teeth	Bolt-on edges	Change in specs
2.90 3.75	2.90 3.75	3.10 4.00	3.10 4.00	5.20 6.75	
2.45 3.20	2.44 3.19	2.72 3.56	2.71 3.54	4.62 6.04	
2984 9'9"	2969 9'9"	2984 9'9"	2969 9'9"	3073 10'1"	
2871 9'5"	2712 8'11"	2806 9'2"	2645 8'8"	2716 8'11"	498 1'8"
1297 4'3"	1425 4'8"	1340 4'5"	1466 4'10"	1278 4'2"	3 0.1"
2588 8'6"	2789 9'2"	2668 8'9"	2869 9'5"	2707 8'11"	366 1'2"
92 3.62	62 2.44	92 3.62	62 2.44	92 3.62	-10 -0.4
8090 26'7"	8322 27'4"	8170 26'10"	8402 27'7"	8229 27'0"	433 1'5"
5391 17'8"	5391 17'8"	5471 17'11"	5471 17'11"	6005 19'8"	498 1'8"
7068 23'2"	7130 23'5"	7089 23'3"	7152 23'6"	7141 23'5"	205 0'8"
14 044 30,967	14 186 31,280	13 587 29,959	13 743 30,303	13 996 30,861	-3776 -8,326
12 216 26,936	12 353 27,238	11 769 25,951	11 921 26,286	12 092 26,663	-3376 -7,444
151.0 33,975	159.0 35,775	140.0 31,500	147.0 33,075	135.0 30,375	-6.70 -1,508
19 464 42,918	19 381 42,735	19 820 43,703	19 737 43,520	20 137 44,402	533 1,175

* Static tipping loads and operating weights shown are based on standard machine configuration with 23.5R25 tires, full fuel tank, coolants, lubricants, air conditioner, ride control and operator.

** Measured 102 mm (4.0") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.


(5) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

Operation Specifications (Mid-Lift Configuration)

General Purpose Buckets

		Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges		
		Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
Rated bucket capacity (\$)	m ³	2.70	2.90	2.90	2.90	3.10	3.10	3.10	3.30	3.30
	yd ³	3.50	3.75	3.75	3.75	4.00	4.00	4.00	4.25	4.25
Struck capacity (\$)	m ³	2.30	2.45	2.45	2.49	2.65	2.65	2.66	2.82	2.82
	yd ³	3.00	3.20	3.20	3.26	3.47	3.47	3.48	3.69	3.69
Width (\$)	mm	2994	2994	2927	2994	2994	2927	2994	2994	2927
	ft/in	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"
Dump clearance at full lift and 45° discharge (\$)	mm	3014	3014	3116	3009	3009	3112	3004	3004	3107
	ft/in	9'11"	9'11"	10'3"	9'10"	9'10"	10'3"	9'10"	9'10"	10'2"
Reach at full lift and 45° discharge (\$)	mm	1265	1265	1165	1250	1250	1152	1242	1242	1145
	ft/in	4'2"	4'2"	3'10"	4'1"	4'1"	3'9"	4'1"	4'1"	3'9"
Reach with lift arm horizontal and bucket level (\$)	mm	2735	2735	2593	2730	2730	2588	2730	2730	2588
	ft/in	9'0"	9'0"	8'6"	8'11"	8'11"	8'6"	8'11"	8'11"	8'6"
Digging depth (\$)	mm	62	92	92	62	92	92	62	92	92
	in	2.44	3.62	3.62	2.44	3.62	3.62	2.44	3.62	3.62
Overall length	mm	8294	8294	8142	8289	8289	8137	8289	8289	8137
	ft/in	27'3"	27'3"	26'9"	27'2"	27'2"	26'8"	27'2"	27'2"	26'8"
Overall height with bucket at full raise	mm	5576	5576	5576	5633	5633	5633	5681	5681	5681
	ft/in	18'4"	18'4"	18'4"	18'6"	18'6"	18'6"	18'8"	18'8"	18'8"
Turning radius – outside corner of racked bucket, carry position (\$)	mm	7149	7149	7074	7147	7147	7073	7147	7147	7073
	ft/in	23'5"	23'5"	23'3"	23'5"	23'5"	23'2"	23'5"	23'5"	23'2"
Static tipping load straight*	kg	13 551	13 256	13 368	13 429	13 138	13 251	13 311	13 025	13 138
	lb	29,880	29,229	29,476	29,611	28,969	29,218	29,351	28,720	28,969
Static tipping load full 37° turn	kg	11 806	11 529	11 642	11 692	11 419	11 532	11 581	11 312	11 425
	lb	26,032	25,421	25,671	25,781	25,179	25,428	25,536	24,943	25,192
Breakout force** (\$)	kN	181.0	165.0	165.0	181.0	165.0	165.0	180.0	164.0	165.0
	lb	40,725	37,125	37,125	40,725	37,125	37,125	40,500	36,900	37,125
Operating weight* (\$)	kg	19 292	19 449	19 342	19 344	19 501	19 394	19 409	19 566	19 459
	lb	42,539	42,885	42,649	42,654	43,000	42,764	42,797	43,143	42,907

Bucket Selection Guide

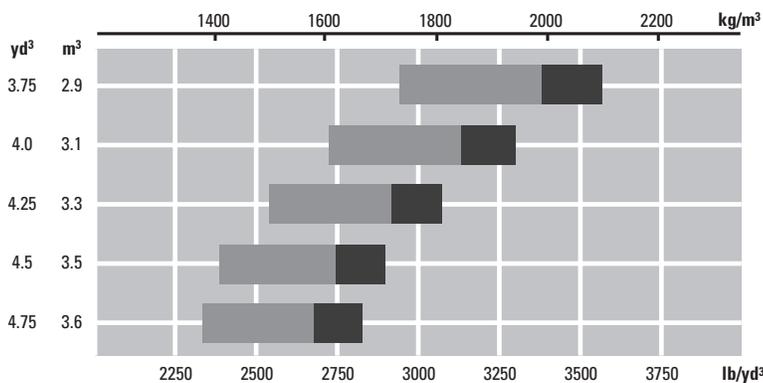

Material Density



General Purpose Quick Coupler Buckets

Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
3.30 4.25	3.50 4.50	3.50 4.50	3.50 4.50	3.60 4.75	3.60 4.75	3.10 4.00	3.30 4.25	3.30 4.25	3.30 4.25	3.50 4.50	3.50 4.50
2.81 3.68	2.98 3.90	2.98 3.90	2.97 3.88	3.14 4.11	3.14 4.11	2.64 3.45	2.80 3.66	2.80 3.66	2.85 3.73	3.00 3.92	3.00 3.92
2896 9'6"	2946 9'8"	2946 9'8"	2946 9'8"	2946 9'8"	2946 9'8"	2896 9'6"	2946 9'8"	2946 9'8"	2896 9'6"	2946 9'8"	2946 9'8"
2898 9'6"	2898 9'6"	3002 9'10"	2861 9'5"	2861 9'5"	2966 9'9"	2871 9'5"	2871 9'5"	2975 9'9"	2820 9'3"	2820 9'3"	2922 9'7"
1356 4'5"	1356 4'5"	1258 4'2"	1384 4'6"	1384 4'6"	1287 4'3"	1398 4'7"	1398 4'7"	1300 4'3"	1508 4'11"	1508 4'11"	1407 4'7"
2886 9'6"	2886 9'6"	2743 9'0"	2933 9'7"	2933 9'7"	2791 9'2"	2934 9'8"	2934 9'8"	2791 9'2"	3044 10'0"	3044 10'0"	2901 9'6"
62.4 2.46	92.4 3.64	92.4 3.64									
8445 27'8"	8445 27'8"	8292 27'2"	8493 27'10"	8493 27'10"	8340 27'4"	8493 27'10"	8493 27'10"	8340 27'4"	8603 28'3"	8603 28'3"	8450 27'9"
5569 18'3"	5569 18'3"	5569 18'3"	5613 18'5"	5613 18'5"	5613 18'5"	5589 18'4"	5589 18'4"	5589 18'4"	5623 18'5"	5623 18'5"	5623 18'5"
7147 23'5"	7170 23'6"	7124 23'4"	7183 23'7"	7183 23'7"	7137 23'5"	7160 23'6"	7183 23'7"	7137 23'5"	7192 23'7"	7215 23'8"	7169 23'6"
13 166 29,031	13 161 29,020	13 126 28,943	13 186 29,075	13 227 29,166	13 158 29,013	12 758 28,131	12 759 28,134	12 721 28,050	12 665 27,926	12 670 27,937	12 639 27,869
11 461 25,272	11 436 25,216	11 421 25,183	11 490 25,335	11 507 25,373	11 462 25,274	11 086 24,445	11 066 24,401	11 049 24,363	10 995 24,244	10 978 24,206	10 969 24,187
160.0 36,000	147.0 33,075	148.0 33,300	154.0 34,650	142.0 31,950	142.0 31,950	154.0 34,650	142.0 31,950	142.0 31,950	140.0 31,500	130.0 29,250	131.0 29,475
19 449 42,885	19 606 43,231	19 497 42,991	19 347 42,660	19 484 42,962	19 376 42,724	19 647 43,322	19 804 43,668	19 696 43,430	19 701 43,441	19 858 43,787	19 750 43,549

Operation Specifications (Mid-Lift Configuration)

		Material Handling Buckets								
		Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges			Teeth and segments Bolt-on edges		
		Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges	Teeth	Teeth and segments	Bolt-on edges
Rated bucket capacity (§)	m ³	3.10	3.30	3.30	3.30	3.50	3.50	3.60	3.80	3.80
	yd ³	4.00	4.25	4.25	4.25	4.50	4.50	4.75	5.00	5.00
Struck capacity (§)	m ³	2.67	2.83	2.83	2.84	3.00	3.00	3.10	3.27	3.27
	yd ³	3.49	3.70	3.70	3.71	3.92	3.92	4.00	4.28	4.28
Width (§)	mm	2994	2994	2927	2994	2994	2927	2994	2994	2927
	ft/in	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"	9'10"	9'10"	9'7"
Dump clearance at full lift and 45° discharge (§)	mm	2915	2915	3025	2880	2880	2990	2827	2827	2937
	ft/in	9'7"	9'7"	9'11"	9'5"	9'5"	9'10"	9'3"	9'3"	9'8"
Reach at full lift and 45° discharge (§)	mm	1199	1199	1108	1234	1234	1144	1287	1287	1197
	ft/in	3'11"	3'11"	3'8"	4'1"	4'1"	3'9"	4'3"	4'3"	3'11"
Reach with lift arm horizontal and bucket level (§)	mm	2780	2780	2638	2830	2830	2688	2905	2905	2763
	ft/in	9'1"	9'1"	8'8"	9'3"	9'3"	8'10"	9'6"	9'6"	9'1"
Digging depth (§)	mm	62	92	92	62	92	92	62	92	92
	in	2.44	3.62	3.62	2.44	3.62	3.62	2.44	3.62	3.62
Overall length	mm	8339	8339	8187	8389	8389	8237	8464	8464	8312
	ft/in	27'4"	27'4"	26'10"	27'6"	27'6"	27'0"	27'9"	27'9"	27'3"
Overall height with bucket at full raise	mm	5626	5626	5626	5672	5672	5672	5741	5741	5741
	ft/in	18'5"	18'5"	18'5"	18'7"	18'7"	18'7"	18'10"	18'10"	18'10"
Turning radius – outside corner of racked bucket, carry position (§)	mm	7161	7161	7086	7175	7175	7100	7196	7196	7121
	ft/in	23'6"	23'6"	23'3"	23'6"	23'6"	23'4"	23'7"	23'7"	23'4"
Static tipping load straight*	kg	13 668	13 370	13 484	13 559	13 403	13 378	13 393	13 107	13 222
	lb	30,138	29,481	29,732	29,898	29,554	29,498	29,532	28,901	29,155
Static tipping load full 37° turn	kg	11 909	11 629	11 743	11 807	11 651	11 645	11 653	11 384	11 499
	lb	26,259	25,642	25,893	26,034	25,690	25,677	25,695	25,102	25,355
Breakout force** (§)	kN	173.0	158.0	159.0	165.0	151.0	152.0	154.0	142.0	143.0
	lb	38,925	35,550	35,775	37,125	33,975	34,200	34,650	31,950	32,175
Operating weight* (§)	kg	19 273	19 430	19 323	19 315	19 472	19 365	19 380	19 537	19 430
	lb	42,497	42,843	42,607	42,590	42,936	42,700	42,733	43,079	42,843

Rock Buckets				Waste/ Coal Buckets
Bolt-on edges	Teeth and segments	Bolt-on edges	Bottom strap teeth	Bolt-on edges
2.90 3.75	2.90 3.75	3.10 4.00	3.10 4.00	5.20 6.75
2.45 3.20	2.44 3.19	2.72 3.56	2.71 3.54	4.62 6.04
2984 9'9"	2969 9'9"	2984 9'9"	2969 9'9"	3073 10'1"
3061 10'1"	2902 9'6"	2996 9'10"	2835 9'4"	2906 9'6"
1247 4'1"	1375 4'6"	1290 4'3"	1416 4'8"	1228 4'0"
2688 8'10"	2889 9'6"	2768 9'1"	2969 9'9"	2807 9'3"
92 3.62	62 2.44	92 3.62	62 2.44	92 3.62
8217 27'0"	8448 27'9"	8317 27'3"	8548 28'1"	8356 27'5"
5581 18'4"	5581 18'4"	5662 18'7"	5662 18'7"	6195 20'4"
7126 23'5"	7191 23'7"	7148 23'5"	7214 23'8"	7199 23'7"
13 263 29,245	13 401 29,549	12 813 28,253	12 965 28,588	13 147 28,989
11 514 25,388	11 647 25,682	11 074 24,418	11 222 24,745	11 330 24,983
152.0 34,200	160.0 36,000	141.0 31,725	148.0 33,300	136.0 30,600
19 596 43,209	19 513 43,026	19 952 43,994	19 869 43,811	20 269 44,693

* Static tipping loads and operating weights shown are based on standard machine configuration with 23.5R25 tires, full fuel tank, coolants, lubricants, air conditioner, ride control and operator.

** Measured 102 mm (4.0") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732C.

(5) Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers, including SAE Standard J732C governing loader ratings.

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for details.

ELECTRICAL

- Alarm, back-up
- Alternator, 80-amp brushless
- Batteries, Maintenance free (2) 1400 CCA
- Ignition key; start/stop switch
- Lighting system, halogen (6 total)
- Main disconnect switch
- Receptacle, starting, 24-volt
- Starter, electric, heavy-duty
- Starting and charging system (24-volt)

OPERATOR ENVIRONMENT

- Bucket/work tool function lockout
- Cab, pressurized and sound-suppressed ROPS/FOPS
 - Radio-ready (entertainment) includes antenna, speakers and converter (12-volt, 10-amp)
- Cigar lighter and ashtray (12-volt)
- Coat hook (2) with straps
- Computerized monitoring system
 - Instrumentation, gauges:
 - Digital gear range indicator
 - Engine coolant temperature
 - Fuel level
 - Hydraulic oil temperature
 - Speedometer/tachometer
 - Transmission oil temperature
 - Instrumentation, warning indicators:
 - Air inlet heater
 - Axle oil temperature
 - Electrical, alternator output
 - Engine inlet manifold temperature
 - Engine oil pressure
 - Fuel level
 - Fuel pressure, hi/low
 - Hydraulic oil level
 - Parking brake
 - Primary steering oil pressure
 - Service brake oil pressure
 - Transmission filter bypass
- Controls, electrohydraulic, lift and tilt function
- Heater and defroster
- Horn, electric (steering wheel/console)
- Light, dome (cab)
- Lunchbox, beverage holders and personal tray
- Mirror, rearview (internally mounted)
- Seat, Cat Comfort (cloth) with air suspension
- Seat belt, retractable, 51 mm (2") wide
- Steering column, adjustable angle (SW-CCS) and length (CCS)
- Wet-Arm wipers and washers, front and rear
 - Intermittent front wipers
- Window, sliding (left and right side)

POWER TRAIN

- Brakes, full hydraulic enclosed wet-disc with Integrated Braking System (IBS) and brake wear indicator
- Engine, Cat C7 with ACERT Technology and ATAAC
- Fan, radiator, electronically controlled, hydraulically driven, temperature sensing, on demand
- Filters, fuel, primary/secondary
- Filters, engine air, primary/secondary
- Fuel priming pump (electric)
- Fuel/water separator
- Muffler, sound suppressed
- Precleaner, engine air intake
- Radiator, unit core
- Starting aid, air inlet heater
- Switch, transmission neutralizer lockout
- Torque converter, free wheel stator
- Transmission, automatic, planetary powershift (4F/4R)
- Variable Shift Control (VSC)

OTHER

- Automatic bucket positioner
- Counterweight
- Couplings, Caterpillar O-ring face seal
- Doors, service access (locking)
- Ecology drains, engine, transmission and hydraulics
- Fenders, steel (front and rear)
- Guard, airborne debris
- Hitch, drawbar with pin
- Hood, non-metallic, power tilting
- Hoses, Caterpillar XT™
- Hydraulic oil cooler
- Kickout, lift and tilt, automatic (in-cab adjustable)
- Linkage, Z-bar, cast crosstube/tilt lever
- Oil sampling valves
- Product Link ready
- Remote diagnostic pressure taps
- Service center, electrical and hydraulic
- Sight gauges:
 - Engine coolant
 - Hydraulic oil
 - Transmission oil level
- Steering, load sensing
- Vandalism protection caplocks

TIRES, RIMS, WHEELS

A tire must be selected from the mandatory attachments section. Base machine price includes an allowance based on a premium radial tire.

ANTIFREEZE

Premixed 50% concentration of Extended Life Coolant with freeze protection to -34°C (-29°F)

Optional Equipment

Optional equipment may vary. Consult your Caterpillar dealer for details.

Air conditioner
Aggregate Autodig System
Autolube
Buckets and work tools
Bucket Ground Engaging Tools (GET) - see Cat dealer for details
Camera, rear vision
Cooler, axle oil
Differentials
 Limited slip, front or rear
 NO-SPIN, rear
Drain, axle ecology
Fender extensions, front and rear
Fenders, narrow
Fenders, roading
Guard, axle seal
Guard, front window, wide or small mesh
Guard, power train
Heater, engine coolant, 120- or 240-volt
Hydraulic arrangement, three-valve
Joystick control, two- or three-valve
Lights, directional
Lights, high intensity discharge (HID)
Lights, roading
Light, warning beacon
Lights, work, cab-mounted
Machine Security System
Mirrors, external
Mirrors, heated external
Mirrors, heated external, folding
Open canopy
Payload Control System
 Payload Control System Printer
Platform, window cleaning
Precleaner, turbine
Precleaner, turbine/trash
Product Link
Radio, AM/FM Weatherband (CD)
Radio, CB-ready
Remote pressure taps, transmission
Ride Control System, two- or three-valve
Seatbelt, 76 mm (3") wide
Sound suppression, exterior
Starting aid, ether
Steering, Command Control System
Steering, secondary
Switch, lift lever FNR (steering wheel machines)
Sun visor, front
Tool box
Special Machine Arrangements
 High Lift Arrangement, two- and three-valve
 Forest Machine Arrangement
 Industrial Loader Arrangement
 Sewer and Water Arrangement
 Yard Loader Value Package
Hydraulic arrangement, 3-valve, mid-lift

Notes

962H Wheel Loader

For more complete information on Cat products, dealer services,
and industry solutions, visit us on the web at www.cat.com

© 2007 Caterpillar
All Rights Reserved
Printed in U.S.A.

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Caterpillar dealer for available options.

AEHQ5676-01 (5-07)
Replaces AEHQ5676

CAT, CATERPILLAR, their respective logos, ACERT, "Caterpillar Yellow" and the
POWER EDGE trade dress, as well as corporate and product identity used herein,
are trademarks of Caterpillar and may not be used without permission.

CATERPILLAR[®]