


953D SH/963D SH/973D SH Shiphold/Port Handling

Dimensions

All dimensions are approximate.

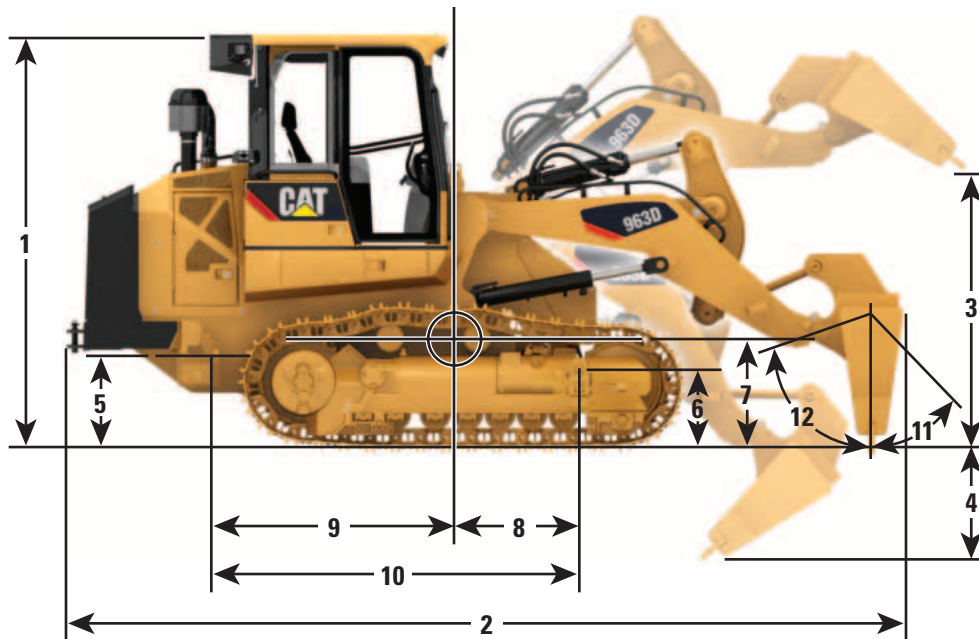

	953D		963D		973D	
1 Overall Height	3099 mm	122.0 in	3335 mm	131.3 in	3510 mm	138.2 in
2 Overall Length	5513 mm	217.0 in	6687 mm	263.3 in	7200 mm	283.5 in
3 Work Tool Height	3495 mm	137.6 in	4359 mm	171.6 in	4420 mm	174.0 in
4 Digging Depth	560 mm	22.0 in	916 mm	36.1 in	977 mm	38.5 in
Overall Width – with 480 mm/19.7 in shoes	2280 mm	89.8 in				
Overall Width – with 550 mm/21.6 in shoes			2400 mm	94.5 in	2710 mm	106.7 in
Blade Width	3148 mm	124.0 in	3150 mm	124.0 in	3469 mm	136.6 in
5 Rear Lifting Eye Height	700 mm	27.6 in	762 mm	30.0 in	1040 mm	40.9 in
6 Front Lifting Eye Height	600 mm	23.6 in	645 mm	25.4 in	885 mm	34.8 in
Center of Gravity Dimensions						
7 Center of Gravity Height	902 mm	35.5 in	863 mm	34.0 in	863 mm	34.0 in
8 Center of Gravity to Front Eye	1027 mm	40.4 in	1034 mm	40.7 in	1207 mm	47.5 in
9 Center of Gravity to Rear Eye	1653 mm	65.1 in	1866 mm	73.5 in	1651 mm	65.0 in
10 Distance from Rear to Front Lifting Eyes	2680 mm	105.5 in	2900 mm	114.2 in	2960 mm	116.5 in
11 Trim Blade Pitch – Forward		+44°		+47°		+43°
12 Trim Blade Pitch – Rearward		-71°		-61°		-58°